


PASCAL USERS GROUP

Pascal News

NUMBER ~~18~~ 19

COMMUNICATIONS ABOUT THE PROGRAMMING LANGUAGE PASCAL BY PASCALERS

SEPTEMBER, 1980

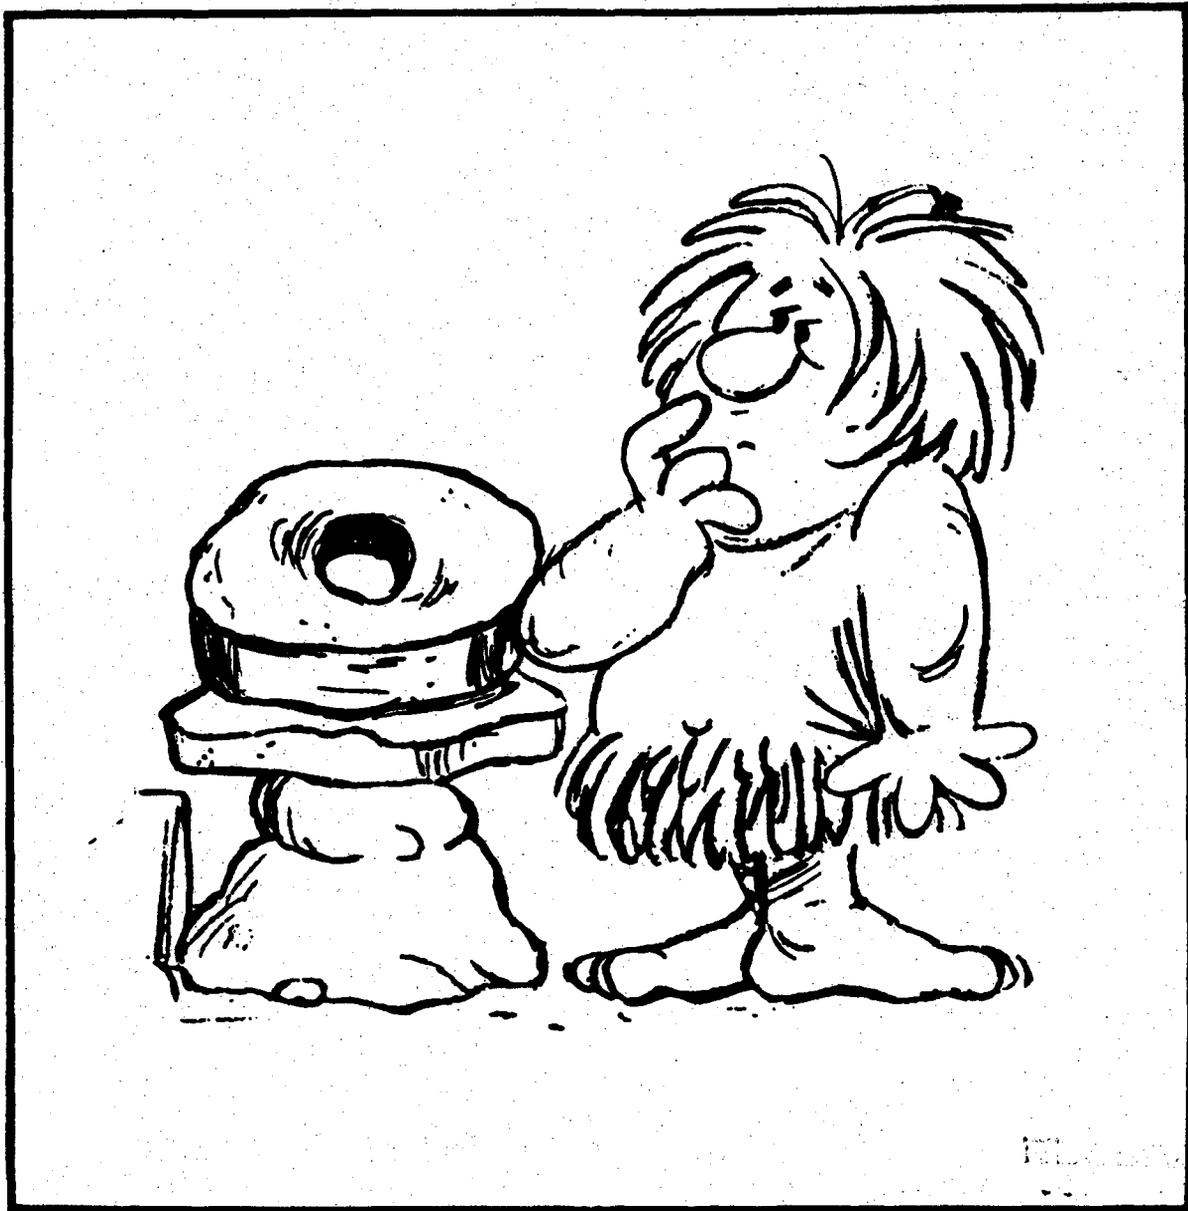

EX LIBRIS: David T. Craig
736 Edgewater
[# _____] Wichita, Kansas 67230 (USA)

- * Pascal News is the official but informal publication of the User's Group.
- * Pascal News contains all we (the editors) know about Pascal; we use it as the vehicle to answer all inquiries because our physical energy and resources for answering individual requests are finite. As PUG grows, we unfortunately succumb to the reality of:
 1. Having to insist that people who need to know "about Pascal" join PUG and read Pascal News - that is why we spend time to produce it!
 2. Refusing to return phone calls or answer letters full of questions - we will pass the questions on to the readership of Pascal News. Please understand what the collective effect of individual inquiries has at the "concentrators" (our phones and mailboxes). We are trying honestly to say: "We cannot promise more that we can do."
- * Pascal News is produced 3 or 4 times during a year; usually in March, June, September, and December.
- * ALL THE NEWS THAT'S FIT, WE PRINT. Please send material (brevity is a virtue) for Pascal News single-spaced and camera-ready (use dark ribbon and 18.5 cm lines!)
- * Remember: ALL LETTERS TO US WILL BE PRINTED UNLESS THEY CONTAIN A REQUEST TO THE CONTRARY.
- * Pascal News is divided into flexible sections:

POLICY - explains the way we do things (ALL-PURPOSE COUPON, etc.)

EDITOR'S CONTRIBUTION - passes along the opinion and point of view of the editor together with changes in the mechanics of PUG operation, etc.

HERE AND THERE WITH PASCAL - presents news from people, conference announcements and reports, new books and articles (including reviews), notices of Pascal in the news, history, membership rosters, etc.

APPLICATIONS - presents and documents source programs written in Pascal for various algorithms, and software tools for a Pascal environment; news of significant applications programs. Also critiques regarding program/algorithm certification, performance, standards conformance, style, output convenience, and general design.

ARTICLES - contains formal, submitted contributions (such as Pascal philosophy, use of Pascal as a teaching tool, use of Pascal at different computer installations, how to promote Pascal, etc.).

OPEN FORUM FOR MEMBERS - contains short, informal correspondence among members which is of interest to the readership of Pascal News.

IMPLEMENTATION NOTES - reports news of Pascal implementations: contacts for maintainers, implementors, distributors, and documentors of various implementations as well as where to send bug reports. Qualitative and quantitative descriptions and comparisons of various implementations are publicized. Sections contain information about Portable Pascals, Pascal Variants, Feature-Implementation Notes, and Machine-Dependent Implementations.

- - - - - ALL-PURPOSE COUPON - - - - - (15-Sep-80)

Pascal User's Group, c/o Rick Shaw
P.O. Box 888524
Atlanta, Georgia 30338 USA

****NOTE****

- Membership fee and All Purpose Coupon is sent to your Regional Representative.
- SEE THE POLICY SECTION ON THE REVERSE SIDE FOR PRICES AND ALTERNATE ADDRESS if you are located in the European or Australasian Regions.
- Membership and Renewal are the same price.
- Note the discounts below, for multi-year subscription and renewal.
- The U. S. Postal Service does not forward Pascal News.

| | | USA | Europe | Aust. |
|-----------------------------------|-------------|-------|--------|---------|
| [] Enter me as a new member for: | [] 1 year | \$10. | £6. | A\$ 8. |
| | [] 2 years | \$18. | £10. | A\$ 15. |
| [] Renew my subscription for: | [] 3 years | \$25. | £14. | A\$ 20. |

[] Send Back Issue(s) !

- [] My new address/phone is listed below
- [] Enclosed please find a contribution, idea, article or opinion which is submitted for publication in the Pascal News.

[] Comments: _____

| |
|--|
| ! ENCLOSED PLEASE FIND: \$ _____ ! £ _____ ! ! CHECK no. _____ ! |
|--|

NAME _____

ADDRESS _____

PHONE _____

COMPUTER _____

DATE _____

JOINING PASCAL USER'S GROUP?

- Membership is open to anyone: Particularly the Pascal user, teacher, maintainer, implementor, distributor, or just plain fan.
- Please enclose the proper prepayment (check payable to "Pascal User's Group"); we will not bill you.
- Please do not send us purchase orders; we cannot endure the paper work!
- When you join PUG any time within a year: January 1 to December 31, you will receive all issues of Pascal News for that year.
- We produce Pascal News as a means toward the end of promoting Pascal and communicating news of events surrounding Pascal to persons interested in Pascal. We are simply interested in the news ourselves and prefer to share it through Pascal News. We desire to minimize paperwork, because we have other work to do.

-
- American Region (North and South America): Send \$10.00 per year to the address on the reverse side. International telephone: 1-404-252-2600.
 - European Region (Europe, North Africa, Western and Central Asia): Join through PUG (UK). Send £5.00 per year to: Pascal Users Group, c/o Computer Studies Group, Mathematics Department, The University, Southampton SO9 5NH, United Kingdom; or pay by direct transfer into our Post Giro account (28 513 4000); International telephone: 44-703-559122 x700.
 - Australasian Region (Australia, East Asia - incl. Japan): PUG(AUS). Send \$A10.00 per year to: Pascal Users Group, c/o Arthur Sale, Department of Information Science, University of Tasmania, Box 252C GPO, Hobart, Tasmania 7001, Australia. International telephone: 61-02-23 0561 x435
-

PUG(USA) produces Pascal News and keeps all mailing addresses on a common list. Regional representatives collect memberships from their regions as a service, and they reprint and distribute Pascal News using a proof copy and mailing labels sent from PUG(USA). Persons in the Australasian and European Regions must join through their regional representatives. People in other places can join through PUG(USA).

RENEWING?

- Please renew early (before November and please write us a line or two to tell us what you are doing with Pascal, and tell us what you think of PUG and Pascal News. Renewing for more than one year saves us time.

ORDERING BACK ISSUES OR EXTRA ISSUES?

- Our unusual policy of automatically sending all issues of Pascal News to anyone who joins within a year means that we eliminate many requests for backissues ahead of time, and we don't have to reprint important information in every issue--especially about Pascal implementations!
- Issues 1 .. 8 (January, 1974 - May 1977) are out of print.
(A few copies of issue 8 remain at PUG(UK) available for £2 each.)
- Issues 9 .. 12 (September, 1977 - June, 1978) are available from PUG(USA) all for \$15.00 and from PUG(AUS) all for \$A15.00
- Issues 13 .. 16 are available from PUG(UK) all for £10; from PUG(AUS) all for \$A15.00; and from PUG(USA) all for \$15.00.
- Extra single copies of new issues (current academic year) are: \$5.00 each - PUG(USA); £3 each - PUG(UK); and \$A5.00 each - PUG(AUS).

SENDING MATERIAL FOR PUBLICATION?

- Your experiences with Pascal (teaching and otherwise), ideas, letters, opinions, notices, news, articles, conference announcements, reports, implementation information, applications, etc. are welcome. Please send material single-spaced and in camera-ready (use a dark ribbon and lines 18.5 cm. wide) form.
- All letters will be printed unless they contain a request to the contrary.

Index

| | |
|-----|--|
| 0 | POLICY, COUPONS, INDEX, ETC. |
| 1 | EDITOR'S CONTRIBUTION |
| 3 | HERE AND THERE WITH Pascal |
| 3 | Tidbits |
| 7 | Pascal in the News |
| 9 | Gossip |
| 9 | Books and Articles |
| 23 | Book review: "Pascal with Style: Programming Proverbs" |
| 24 | Review of all back issues of Pascal News (1..16)!! |
| 27 | Pascal Users Group finances: 1978-1979 |
| 28 | Computer systems represented by PUG -- a summary |
| 29 | APPLICATIONS |
| 29 | Corrections to the XREF program (PN#17) |
| 30 | Pascal-S Subset Pascal written in Pascal |
| 41 | Notes on System Dependent Code in Pascal-S & Pascal-I |
| 44 | LISP Lisp Interpreter written in Pascal |
| 48 | ARTICLES |
| 49 | "An Implementation of NEW and DISPOSE Using Boundary Tags" -- Branko J. Gerovac |
| 60 | "A Simple Extension to Pascal for Quasi Parallel Processing" -- Terje Noodt |
| 67 | OPEN FORUM FOR MEMBERS |
| 71 | PASCAL STANDARDS |
| 85 | IMPLEMENTATION NOTES |
| 85 | Editorial |
| 85 | Validation Suite Reports |
| 112 | Checklists |
| 125 | ONE PURPOSE COUPON, POLICY |

Contributors to this issue (#19) were:

| | |
|----------------------|---------------------------------------|
| EDITOR | Rick Shaw |
| Here & There | John Eisenberg |
| Books & Articles | Rich Stevens |
| Applications | Rich Cichelli, Andy Mickel |
| Standards | Jim Miner, Tony Addyman |
| Implementation Notes | Bob Dietrich, Greg Marshall |
| Administration | Moe Ford, Kathy Ford, Jennie Sinclair |

APPLICATION FOR LICENSE TO USE VALIDATION SUITE FOR PASCAL

Name and address of requestor: _____
(Company name if requestor is a company) _____

Phone Number: _____

Name and address to which information should
be addressed (Write "as above" if the same) _____

Signature of requestor: _____

Date: _____

In making this application, which should be signed by a responsible person in the case of a company, the requestor agrees that:

- a) The Validation Suite is recognized as being the copyrighted, proprietary property of R. A. Freak and A.H.J. Sale, and
- b) The requestor will not distribute or otherwise make available machine-readable copies of the Validation Suite, modified or unmodified, to any third party without written permission of the copyright holders.

In return, the copyright holders grant full permission to use the programs and documentation contained in the Validation Suite for the purpose of compiler validation, acceptance tests, benchmarking, preparation of comparative reports, and similar purposes, and to make available the listings of the results of compilation and execution of the programs to third parties in the course of the above activities. In such documents, reference shall be made to the original copyright notice and its source.

Distribution charge: \$50.00

Make checks payable to ANPA/RI in US dollars drawn on a US bank. Remittance must accompany application.

Source Code Delivery Medium Specification:
9-track, 800 bpi, NRZI, Odd Parity, 600' Magnetic Tape

ANSI-Standard

a) Select character code set:
 ASCII EBCDIC

b) Each logical record is an 80 character card image.
Select block size in logical records per block.
 40 20 10

Special DEC System Alternates:
 RSX-IAS PIP Format
 DOS-RSTS FLX Format

Mail request to:

ANPA/RI
P.O. Box 598
Easton, Pa. 18042
USA
Attn: R.J. Cichelli

Office use only

Signed _____
Date _____

Richard J. Cichelli
On behalf of A.H.J. Sale & R.A. Freak

Editor's Contribution

SO WHATS NEW

Well lots! We have extended the subscriptions of all members by 6 months. The effect of this change is that we align the subscription year to the calendar year instead of an academic year. So now, it should be easier to know when your subscription expires. Note that our policy of sending all back issues for the year has not changed. Therefore the year marked on the labels is the year through which your subscription is effective. Remember, now subscriptions expire on December 31.

Also, as you can see if you have read the new APC, the price of Pascal News is going up. Sorry. We resisted as long as we could. But note that we offer a good price break for multiple year subscriptions. Subscribing for more than one year saves us a great deal of work. Please, please help us save paper work! The new prices will go into effect 1-January-80. Until then, we will accept renewals and subscriptions at the old price. So if you have not yet renewed, do it now, while the price is low low low! We also have a new address! (note the new APC again) You may recognize it as the return address for issues 17 and 18. The address is simple and does not include a company name. (yes the box number really does have six digits and three are 8's) I hope the new address mollifies those people who worried about vendor bias. By the way, my employer provides no support for Pascal Users Group, in any way shape or form. Which leads me to the next subject.

HELP -- I'M BEGGING

Pascal Users Group needs its own computer. It has become a necessity, to be able to maintain our ever increasing data base, and do all of our record keeping. If your company can offer any type of a product for our use either as a gift, for long term use, or at a substantial discount we would like to hear from you. We are not very ambitious. Our thoughts are to secure a micro processor, a terminal, a small line printer, a hard disk, and a set of floppys. Small potatoes! Right? The system must be in place by December in order for us to be on time for the next issue. So, please, won't you call right away. (Jerry Lewis, eat your heart out) I have exhausted all my favors in Atlanta.

CHANGE OF ADDRESS -- A REAL PROBLEM

I just can not believe how many people change there address and do not inform Pascal News! The expense is phenominal. Bulk mail is not forwardable by the post office. It costs

\$.15 to send a change of address card to us, and \$1.43 just in return postage if you do not. That does not include the postage to get it to you at your new address. This is a tremendous expense to PUG when 142 people "just forgot". Please help us get Pascal News to you on time. OK? So if you suspect we may have your back copies, send us a stamped self-addressed envelope with a note telling us which issues you have not recieved and we will give you your copies or a new set, no questions asked. Simple, right?

THE GOOD STUFF -- WHAT'S IN THIS ISSUE

As usual, we have a gigantic "HERE AND THERE" section this issue. it is chock full of feedback from the readers. If you put anything on the "comments" section of the APC or sent anything to me or John that was not a letter, it ends up here. So keep up the notes and comments.

I would also like to call your attention to the section on "BOOKS AND ARTICLES" if you are looking for some side reading on Pascal there are over 300 citings. Wow! And Rich has collected together a very complete list of the text books available on subject of Pascal. If your favorite is not there please drop us a line on an APC. OK?

Since Andy Mickel has a few spare moments lately, he has contributed 3 fine tidbits of information. The first is a thumbnail review of all the back issues of Pascal News (1..16). Second, he has rolled up the 78-79 finances. And third, is a summary of all the machines represented by the PUG membership, derived from the old APCs. Very interesting.

The "APPLICATIONS" section contains Wirth's Pascal-S, the subset Pascal compiler. It has been around for a while but many new users have never seen it. We also have included a LISP interpreter, for those who need the power and flexibility?! Enjoy.

The "ARTICLES" are really great too. Both show a solid approach to making a good thing better.

Jim Miner reports on the standards turmoil. The facts are laid out, and testimony from both sides is presented. You be the judge. And Let us know what you think.

And finally "IMPLEMENTATION NOTES". Fourty pages of them. Note IBM's offical entry. 'Nuff said.

Hope you like it.

RICK

Here and There With Pascal

TTTTTTT

T
T
T
T
T
T
T IDBITS

Peter C. Akwai, IBM Kst. 3787, Postfach 33 09,6000 Frankfurt/M1 West Germany: "We are willing to assume some of the unassigned Pascal Newsletter work caused by Andy Mickel's retirement. Let us know what we can do to help. Pasteup, Selectric composer facilities available, some graphics/cartooning, etc." (*79/05/05*)

Haim Avni, Givat Brenner, Israel 60948: "We are a rather new software group, very keen Pascalers and eager to have this line of communication with other Pascal users." (*80/05/09*)

David P. Babcock, 508 First Street, Alamosa, CO 81101: "Disappointed to note address is now DEC. Please try to maintain at least a semblance of independence in any case." (*80/01/20*)

John W. Baxter, 1830 Avenida del Mundo, Apt. 1710, Coronado, CA 92118 is using Pascal on an Apple at home, and also uses "an offspring of PASCAL -- called NCR language -- in my work at NCR Corp." (*79/12/28*)

Hank Becker, Yourdon - Software Products Group, 1133 Ave. of the Americas, New York, NY 10036: "We will be distributing a Concurrent Pascal (compiler is transportable) with P-codes to run on 8080/8085/Z80 and eventually other [micros]." (*80/02/23*)

Paul J. Beckmann, 1907 Bohland, St. Paul, MN 55116: "PN outstanding! Thanks to Andy and the U of M Pascal Think Tank. Good luck to you, Rick, in Georgia." (*80/02/23*)

Norman Belssner, 9616 Thunderbird Drive, San Ramon, CA 94583 is interested in implementations of Pascal on TRS-80. (*80/01/05*)

K.S. Bhaskar, 22828 76th Ave. W. Apt. #33, Edmonds, WA 98020 is using the NBS Pascal Compiler on a PDP 11/70 to generate code which is executed on a stand-alone LSI-11 for real-time applications. (*80/01/21*)

K. Brauer, Universitaet Onasbrueck, 45 Onasbrueck, Postfach 4469 uses and teaches Pascal at University, and is very much interested in getting further issues of the newsletter. (*80/01/03*)

Frank M. Brewster, 1 North Vista Ave., Bradford, PA 16701: "If you live up to Andy's standards, you'll deserve the same huge thanks we owe to him. Good luck." (*80/02/06*)

Frank Bush, Tennessee Tech. Univ., Box 5071, Cookeville, TN 38501 has just started using UCSD B-6700 Pascal. (*80/05/06*)

R. Bush, P.O. Box F, North Bend, OR 97459: "yeah 'Applications', Validation Suite et al. Kudos to AM for service...is nasty K. Bowles really that bad?" (*80/01/23*)

Larry H. Buss, 101 South U St., Apt., 1, Lompoc, CA 93436: "I have a system running under standard CP/M with 48K.... I would like to examine the latest Pascal documentation. It seems that there are so many different versions of Pascal out. Is the standard Pascal from UCSD the best one?" (*80/01/17*)

Robert Caldwell, Scientific/Humanistic Interfaces, 2939 Governor Dr., San Diego, CA 92122: "Superb job - hang in there!" (*80/01/21*)

Dan Cantley, 3423 Carpenter Rd. Lot 10, Ypsilanti, MI 48197: "Just found the Pascal News - it's GREAT. Learned Pascal six months ago...our Accounting Department wanted an A/R package - our system didn't have the time or space - so I wrote the A/R package on our own micro - stuck it in Accounting Department. They love the package, and I love PASCAL." (*80/01/20*)

Chip Chapin, 3960 La Jolla Village Dr., La Jolla, CA 92037: "Should have joined long ago - have worked with UCSD Pascal project for 3 years." (*80/01/02*)

Les Cline, 1235 Wildwood Ave. #361, Sunnyvale, CA 94086: "I know not what others say, but as for me, give me Pascal, or give me Assembler!!" (*80/05/06*)

Roger A. Collins, 1653 Olmeda St., Encinitas, CA 92024: "I have found Pascal News very informative and helpful. Brought up an interpreter (* on a Perkin-Elmer 8/32 *) but found it unworkable in our environment, am now looking for a compiler." (*80/01/23*)

Stan Crouch, Technicon Medical Information Systems Corp., 3255-1 Scott Blvd., Santa Clara, CA 95051: "I am doing a study on the feasibility of converting some on-line programs to Pascal. I need to know whether or not Pascal programs can be made re-entrant and what is required in the operating system. Also, if you have any information on ADA capabilities I would appreciate any input in that area." (*80/04/08*)

Jeff Davis, 1515-J Tivoli Court, Raleigh, NC 27604 belongs to a local Apple users group that has started a Pascal Special Interest Group with good response. (*80/02/06*)

Tony DiCenzo, Digital Equipment, MR1-1/M40, Marlboro, MA 01752: "Good luck Rick - I'm sure this publication will flourish in your capable hands." (*80/02/03*)

George B. Diamond, Diamond Aerosol Corporation, R-D. #1, Glen Gardner, NJ 08826: "If we had this kind of effort in other fields we would not be a 3rd rate power." (*80/01/23*)

John Dickinson, Dept. of Elec. Engr., Univ. of Idaho, Moscow, Idaho 83843 is

running Pascal on an IBM 370/145 and an HP1000 model 40. (*80/04/01*)

M. F. Doore, 1015 E. 10th St., Long Beach, CA 90813 is a Pascal Watcher in Electrical Engineering hoping to be the owner of a Western Digital P Machine soon. (*80/03/31*)

Donald L. Dunstan, Cogitronics Corporation, 5470 N.W. Innisbrook Place, Portland, OR 97229: "Cogitronics develops software for microprocessor development systems. Currently we are working with a GenRad/Futuredata 8085 development system and have generated a Pascal compiler for this system." (*80/01/23*)

Hank Feeser, 644B Washington Ave., Ft. Lawton, Seattle, WA 98199 owns an Apple II with Pascal and would greatly appreciate "any additional information on the implementation of Pascal on the Apple II". (*80/01/23*)

William A. Freberg, Computer Sciences Corporation, 2753 Highland Dr., Las Vegas, NV 89109: "Implementing Pascal 6000 from Zurich on CDC 6400 owned by Department of Energy at Las Vegas NV (NOS/BE operating system)." (*80/05/06*)

Edward R. Friedman, CIMS/New York Univ., 251 Mercer Street, New York, NY 10012: "Pascal is currently being used in courses devoted to programming languages. PROSE is also popular among researchers." Versions in use are Pascal 6000 Release 3 and Pascal from Sweden. (*80/01/23*)

Stuart H. Gage, Department of Entomology, Michigan State Univ., East Lansing, MI 48824 is "currently running UCSD Pascal on a Terak 8510/a and a CRDS MF-211, along with CDC Pascal on a Cyber 750/175. Our applications deal with delivery of agricultural information using microcomputer networks with an emphasis on graphics." (*80/01/23*)

Stephen Gerke, 1646 Parkcrest Cir. #301, Reston, VA 22090 says we should "consider publishing smaller but more regular PNs. Validation reports are very helpful." (*80/05/05*)

Pete Gifford, Allegheny College, Meadville, PA 16335 is running Pascal on an IBM 4331. (*79/12/26*)

Paul J. Gillian, P.O. Box 2202 C.S., Pullman, WA 99163: "finally got my computer (a Western Digital Pascal micro-Engine) and it's great!" (*80/01/23*)

Thomas Giventer, 127 Linden Ave., Ithaca, NY 14850: "You might be interested to know that the latest version of Ithaca Intersystems'...Pascal/Z now runs under CP/M (instead of K2) and supports real numbers and pointer variables.... See Byte, Jan. '80, page 14." (*80/01/23*)

R. Steven Glanville, Silicon Valley Software, Inc., 1531 Sandpiper Ct., Sunnyvale, CA 94087 is currently implementing an MC68000 Pascal compiler (*80/03/04*)

Steven K. Harr, Ohio State University, University Hospitals, 410 W. 10th Avenue, Columbus, OH 43210: "We are currently in the process of evaluating

PASCAL compilers for use at our installation. We are running VS2 Release 1.7J on an IBM 370 Model 158J with 1.5 Mbytes of memory.... Any literature you may have concerning PASCAL compilers for IBM 370 computers would be extremely helpful to us at this point." (*80/01/16*)

Michael E. Harris, 407 W. Calhoun #17, Springfield, IL 62702: "I heartily agree with the PUG direction. I hope to be installing PASCAL on my Z-80 S100 system later this year. The main thing that I would like to see happen relative to PASCAL would be the establishment of an IBM/AMDAHL 370/3033/470 vendor supported standardized version of the language. Anybody out there have a Sperry-Univac/Varian V77-600 PASCAL that an individual could afford?"

Sassan Hazeghi, P.O. Box 4526, Stanford, CA 94305: "How about setting up a Pascal Program Library (a la SHARE)?" (*80/04/01*)

Thomas Hickey, 295 Garden Rd., Columbus, OH 43214: "Enjoy Pascal News very much. Have brought up Brinch-Hansen's Sequential on (*Xerox*) Sigma-9: limited implementation & very slow!" (*80/04/01*)

Jean Philippe Hilsz, 77 rue Vergniaud, 75013 Paris, France would like to know who supplies PASCAL compilers for Interdata 8/32, Interdata 8/16, Perkin Elmer DS 3220 and 3240. (*80/01/23*)

William T. Hole, M.D., 260 Collingwood, San Francisco, CA 94114 has Pascal/M and is hoping to "unleash the power of Pascal on my massive behavioral research observation files, which deal with premature babies in an intensive care nursery." (*80/04/23*)

Kenneth R. Jacobs, 10112 Ashwood Dr., Kensington, Maryland 20795 is using Pascal on a DEC-10 and Xitan (Z-80) (*79/02/13*)

Steve Jay, Computer Center, University of Arizona, Tucson, AZ 85721: "I am manager of software for the University's Computer Center. We provide PASCAL for use by any of our customers (* on a CDC Cyber 175 and a DEC-10 *). So far, they seem happy with it." (*80/01/21*)

R. L. Jenkins, Hartman Technica, #612-815-1st St. S W, Calgary, Alberta, Canada T2P 1N3: "We are particularly interested in PASCAL for microprocessors. As an electronics design consultancy we produce a lot of microprocessor machine code, and would prefer to leave this uninspiring task to a compiler." (*80/02/14*)

Mort Jonas, P.O. Box 390874, Miami Beach, FL 33139: "I've been using Pascal on the Apple II, and would be most interested in seeing how it would do on the validation suite, though I'm afraid I don't have time to do it myself." (*80/01/23*)

Berneta Kipp, 2206 NE 197th Place #D, Seattle, WA, 98155: "I am a programmer for Boeing writing my first PASCAL program to update a Boeing cost accounting data entry system." (*80/01/20*)

Les Kitchen, Computer Science Center, University of Maryland, College Park, MD 20742: "We're using National Bureau of Standards compiler (PDP-11/Unix), Naval Undersea Lab compiler and University of Wisconsin compiler (both

Univac 1108,1100/40) for computer vision research and for teaching programming." (*80/04/03*)

Richard W. Kreutzer, 644 Elizabeth St., Salt Lake City, UT 84102: "I would like to see updates/corrections to the Pascal validation suite published regularly. I think what you are doing is great." (*80/01/23*)

Peter Kugel, Fulton Hall, Computer Science Department, Boston College, Chestnut Hill, MA 02167: "I like Pascal News. (This validation issue is fiendish. Compliment, not insult.) I use Pascal for teaching. Why do I keep hearing so much about Tasmania?" (*80/05/06*)

B. Kumar, 420 Persian Dr., Sunnyvale, CA 94086 would like information on any Pascal compilers available for PRIME systems. (*80/01/23*)

Karl P. Lacher, 1132 W. Skillman Ave., Roseville, MN 55113: "I am an undergraduate at the Univ. of Minnesota in CSci. I was told about PASCAL NEWS by Andy Mickel who taught a SNOBOL short course I attended. PASCAL is definitely superior to FORTRAN." (*80/05/05*)

Carroll R. Lindholm, P.O. Box 3007, Santa Monica, CA 90403: "Please do not attempt to push state-of-the-art in print size reduction. My eyes are out for days after receiving an issue." (*80/01/21*)

Thomas J. Loeb, 2106 E. Park St., Arlington Heights, IL 60004: "We have formed a small user's group here in Arlington Heights. The majority of us are firmly based in BASIC and are finding the transition to Pascal most interesting.... We are unable to find any books that explain how to put the language to practical application. All the information we have been able to locate seems to be directed to the classroom or beginning programmers." (*80/04/06*)

Gary Loitz, 575 S. Rengstorff Ave. #157, Mountain View, CA 94040: "Using OMSI Pascal VI.2 as the primary implementation language for the Watkins-Johnson Magnetic Bubble Memory test system." (*80/02/06*)

Robert S. Lucas, 6941 N. Olin Ave., Portland, OR 97203: "Keep up the good work!!" (*80/05/05*)

James W. Lynch, Computer Services Marketing, Babcock & Wilcox, P.O. Box 1260, Lynchburg, VA 24505: "New to PUG; have Pascal available on NOS & NOS/BE; used by our service bureau customers & limited internal applications; use here is growing but not widespread; am looking forward to 7600 version." (*80/05/05*)

George A. Martinez, 654 1/2 S. Soto St., Los Angeles, CA 90023: "Keep up the good work. You guys are just great." (*80/01/05*)

David Paul McCarthy, 1532 Simpson #1, Madison, WI 53713: "Keep up the fine work." (*80/04/01*)

John J. McCandliss, 12164 Wensley Road, Florissant, MO 63033: "I am very happy to know that you are continuing the 'Pascal News' in the same fashion as before." (*80/01/20*)

Fred McClelland, 5319 Northridge Ave., San Diego, CA 92117: "Would it be possible for you to reprint the first eight issues of Pascal News?? I would be very interested in purchasing them." (*80/01/21*)

Paul McJones, Xerox Corp., 3333 Coyote Hill Road, Palo Alto, CA 94304: "I would like to see more on languages derived from Pascal, such as Modula and Mesa." (*80/04/03*)

Tony Meadow, P.O. Box 5421, Oxnard, CA 93031: "The PUG Newsletter is one (*of*) the most enjoyable & readable journals/books/... in the computer field - and it's not stuffy at all! Keep it up! Some of the features in it which I find of especial interest is the software exchange and information on current implementations of PASCAL." (*80/01/03*)

Bert Mendelson, McConnell Hall, Smith College, Northampton, MA 01063: "We have switched our introductory course to PASCAL, originally using OMSI PASCAL and will change to DEC's version on our VAX." (*80/03/31*)

Paul Minkin, 3141 Rhode Island Ave. S., St. Louis Park, MN 55426: "Leaving a Concurrent Pascal compiler project & finding myself in an assembly language world has made the benefits of Pascal very clear. I finally have the OMSI compiler & will send more as we use Pascal in the CAD/CAM world. My new company is National Computer Sys. CDM Division." (*80/02/14*)

C. W. Misner, Dept of Physics, Univ. of Maryland, College Park, MD 20742: "Teaching myself programming after 15 years away from it by writing a gradebook editor/analyser." (*80/01/04*)

David V. Moffat, Rt. 7 Box 52A, Chapel Hill, NC 27514: "At N.C.S.U., we run several PASCALS: A.A.E.C., Stony Brook, on 370; sequential & concurrent, on PDP-11; soon will try Ga. Tech & U. of Hull on a PRIME, and somebody's (?) on the VAX. There is a movement here to use Pascal in intro courses when a friendly, informative, cheap compiler is found." (*80/01/04*)

Hugh W. Morgan, 7725 Berkshire Blvd., Powell, TN 37849: "I have recently purchased Pascal from North Star...since this is my first experience with PASCAL and since I am a computer novice with no experience with machine or assembly language this has been a real experience for me, or perhaps I should say ordeal... If you have any information, or can refer me to any published articles which may help me get the terminal options worked out I would be very grateful to you... Now that PASCAL is running I am very much like the dog which finally caught the school bus. The dog didn't know what to do with the bus and I don't know what to do with PASCAL. That's where I hope the PASCAL NEWS and User's Group may help." (*80/01/05*)

Morgan Morrison, Unicorn Systems Company, Suite 402, 3807 Wilshire Blvd., Los Angeles, CA 90010: "We are engaged in the implementation of a software product that is being written in PASCAL. We are interested in CDC Cyber PASCAL implementations." (*80/02/24*)

Timothy A. Nicholson, 97 Douglass Ave., Atherton, CA 94025: "Will be using SLAC Pascal on IBM & UCSD Pascal on Apple." (*80/05/05/*)

Bill Norton, M.H.S. Div., Harnischfeger Corp., 4400 W. National, Milwaukee, WI 53201: "Keeping the present PUG structure and mission is the best way to go. Best of luck to Rick Shaw and friends. Can't use Pascal much right now, but want to stay current." (*80/01/21*)

Thomas J. Oliver, Blue Hills, Dewey, AZ 86327 has a micro and plans to mainly work on alpha numeric, gray scale, pictorial maps and some LANDSAT satellite algorithms." (*80/03/20*)

Ross R. W. Parlette, Chemical Systems, United Technologies, P.O. Box 35B, Sunnyvale, CA 94086: "I went to a 1 day seminar to introduce Pascal; it was very helpful. We hope to have the Validation Suite ready on the VAX for DEC Pascal in Feb. '80. (*80/01/23*)

Jeff Pepper, 5512 Margareta St. #3, Pittsburgh, PA 15206: "Glad you exist!" (*80/02/24*)

James G. Peterson, 1446 6th St., Manhattan Beach, CA 90266: "Keep up the good work! Some form of advertising might be worthwhile, so that more people would know about PUG. I am writing a large CAD system with PASCAL at TRW DSSG." (*80/01/21*)

Gregory N. Pippert, 1200 Columbia Ave., Riverside, CA 92507: "I am using Electro Science Ind. Pascal to drive an ESI Laser system which is used to trim thick-film potentiometers." (*80/02/14*)

Fred Pospeschil, 3108 Jackson St., Bellevue, NC 68005: "I am looking for Pascal implementations on Heath H8 computers" (* That's a PDP-8 architecture *) (*80/04/03*)

Hardy J. Pottinger, EE Dept., Univ. of Missouri, Rolla, MO 65401: "Keep up the good work! I am using Pascal as a microcomputer system development language." (* 80/01/23*)

Fred W. Powell, P.O. Box 2543, Staunton, VA 24401: "I am now using Pascal on a TI 990/10. Thanks for such a tremendous job with Pascal News." (*80/01/08*)

Charles A. Poynton, 113 Chaplin Cr, Toronto, Canada M5P 1A6: "I anxiously and eagerly await each issue; keep up the excellent work!" (*80/02/14*)

Robert M. Pritchett, Trans-National Leasing, Inc., Box 7245, Dallas, TX 75209 is looking for Pascal for the IBM Series/1 running the EDX operating system, or for source code for a Pascal compiler/interpreter on IBM standard 8-inch single-density diskettes, 128 bytes per sector, single or double sided.

Paul Rabin, Philadelphia Health Mgmt. Corp., 530 Walnut St., 14th Floor, Philadelphia, PA 19106: "I am interested in using Concurrent Pascal to implement a real-time dispatch system for the Phila. fire dept. I am looking for D.G. implementations or help converting another to D.G." (*80/04/03*)

Armando R. Rodriguez, c/o S.P. Wovda, Armanpeergstrasse 15, 8000 Muenchen

90, West Germany: "Coming soon: I'll have all PUG software tools in diskette (8 inch, single density, one-sided) to distribute and/or exchange for other tools." (*80/01/07*)

Bernie Rosman, 864 Watertown St., W. Newton, MA 02165: "We use Pascal heavily at Framingham State College and all in-house software at Paramin, Inc....is written in Pascal. Keep up the good work!" (*80/01/21*)

Ira L. Ruben, 2104 Lincoln Dr. East, Ambler, PA 19002: "Have used Pascal to code a Floyd-Evans production metacompiler, also currently designing and coding a communications system (Univac 'DCA') in Pascal. The language is the best I have ever used for implementation except for its lack of data alignment control and packing control, which is needed when processing bit-oriented protocols. PUG is good, but it would be nice if the news came out at more predictable intervals!" (*80/01/21*)

William John Schaller, 4309 28th Ave. S., Minneapolis MN 55406: "I work for Sperry Univac. We are developing a graphics system on a color terminal (Chromatics). We are using UCSD Pascal on a Z80 to accomplish this." (*80/05/05*)

G. A. Schram, Dr. Neher-Laboratories, P.O. box 421, 2260 AK Leidschendam, The Netherlands would like to know about the availability of a DEC-10 or PDP-11 Pascal cross-compiler for the M6800 or Z-80. (*79/11/07*)

Herbert Schulz, 5820 Oakwood Dr., Lisle, IL 60532: "I've been very excited about Pascal ever since reading about it in BYTE. Have had UCSD Apple Pascal since it came out and just got UCSD Pascal for our H-11/A at the Community College where I teach. Will be teaching Pascal to the faculty next term. I'd appreciate any help for that task!" (*80/04/01*)

Ted Shapin, 5110 E. Elsinore Ave, Orange, CA 92669 sends word that Dr. Donald Knuth and Dr. Luis Trabb Pardo at Stanford University are working on a typesetting system, to be implemented in Pascal.

Richard Siemborski, Communicatons & Computer Sciences Dept., Exxon Corp., Box 153, Florham Park, NJ 07932: "I would like a copy of the listing of ALL known PASCAL implementations for micro's, mini's, and mainframes." (*80/02/03*)

Seymour Singer, Bldg. 606/M.S. K110, Hughes Aircraft Co, P.O. Box 3310, Fullerton, CA 92634: "We are offering a 12-week class on PASCAL programming to Hughes personnel using Grogono's text. We have installed both the SLAC and HITAC compilers on our twin Amdahl 470 V/8 computers. The response to this class has been overwhelming! Many students have bought the UCSD system on the Apple microcomputer." (*80/01/10*)

K R Smith, 1632 Hialeah St., Orlando, FL 32808: "Have just ordered HP/1000 (RTE IVB) Pascal. I'll let you-all know as I start using it." (*80/05/05*)

Jon L. Spear, 1007 S.E. 13th Ave., Minneapolis, MN 55414: "I am working with Prof. S. Bruell and G. M. Schneider on a text: "Advanced Programming and Problem Solving with Pascal" which may be available from Wiley by the fall." (*80/05/06*)

E. L. Stechmann, ARH272, Control Data Corp., 4201 N. Lexington Ave., St. Paul, MN 55112: "I enjoy PUG very much: Pascal News is a high point in a day....Question: How can we get the big mainframe manufacturers to accept & support Pascal to the same extent as FORTRAN & COBOL?" (*80/05/06*)

Andrew Stewart, 11 Woodstock Rd., Mt. Waverley, VIC 3149, Australia: "Pascal is a marvellous language because it is so simple and Elegant. I think Pascal News is an excellent means of communication (when it comes!)" (*80/04/14*)

Frank M. Stewart, Mathematics Department, Brown University, Providence, RI 02912: "I have only today learned of your invaluable organization." (*80/03/31*)

Jerry S. Sullivan, Philips Laboratories, 345 Scarborough Road, Briarcliff Manor, NY 10510: "We have made extensive use of the UCSD Pascal System, written a MODULA compiler in Pascal, (* and *) written a number of micro operating systems in MODULA." (*80/03/31*)

Anthony J. Sutton, 1135 W. 4th St., Winston-Salem, NC 27101 is looking for a Pascal implementation under VM/370 CMS (conversational monitor). (*80/01/23*)

K. Stephen Tinius, 1016 Halsey Drive, Monterey, CA 93940: "I am a student at the Naval Postgraduate School here in Monterey.... PASCAL is taught in our...Introduction to programming course, which follows (usually) intros to COBOL and FORTRAN. We run UCSD PASCAL on Altos microprocessors....For my thesis, I'm (trying) to implement NPS-Pascal on Intel hardware to run under CP/M." (*80/01/23*)

Mike Trahan, University Computing Company, 1930 Hi Line Drive, Dallas, TX 75207: "UCC is using PASCAL Release 3.0.0 on a CDC Cyber 175 and CDC 6600 running the NOS/BE v.1.3 - PSR 498 operating system. We use PASCAL for applications programs, utility programs and general programming." (*80/01/05*)

Transmatic Company, Rt. 2, Box 86, Hamlin, TX 79520 has been moving some programs from other machines onto Texas Instruments Pascal with great difficulty because it does not meet the minimum conformance standards. However, it takes less than two seconds to do a job which takes over three and a half minutes on the same machine in BASIC. (*80/04/22*)

Frederick John Tydeman, 3901 Northfield Road, Austin, TX 78759: "Finished my master's in computer science: 'Abstract Machines, Portability, and a Pascal Compiler'. Defined M-code (mobile code) as an intermediate language and implemented a portable Pascal compiler using it." (*80/03/31*)

Stan Veit, Veit's Diversified Operating Systems Ltd., 19 W. 34th St., Room 1113, New York, NY 10001: "We are eastern reps for A.C.I. (* Pascal microengine *) and a Pascal software house." (*80/02/24*)

Ray Vukceвич, 7840 N. 7th St. #1, Phoenix, AZ 85020 would like to know where to get Pascal on a single density PerSci 8" disc for an Imsai 8080

with 56K. (*79/12/28*)

Howard White, Jr., 799 Clayton St., San Francisco, CA 94117 would like information on Pascal 8000 as developed by the Australian Atomic Energy Commission; he is especially interested in references, bibliographies, and user feedback. (*80/03/18*)

Jerome P. Wood, 6105 Harris, Raytown, MO 64133 is interested in Pascal compilers for an IBM S/370 at work. (*80/02/03*)

Stephen Woodbridge, 642 Stearns Ave., Palm Bay, FL 32905: "Please keep up the great work. #13 is my 1st issue and I can't get enough of it." (*79/12/28*)

R. P. Wolff, Ajax Corp., W154 N8105 Elm La., Menomonee Falls, WI, 53051: "Are any compilers available for a 'Microdata Reality or Royale' system?" (*80/01/23*)

George O. Wright, 700 7th St. SW 635, Washington, DC 20024: "Please be friendly to UCSD PASCAL and micro users!" (*80/02/23*)

Earl M. Yavner, 195 Varick Rd., Newton, MA 02168: "Have just heard that Hewlett Packard will have PASCAL for HP1000 systems in a few months. Will send info as I get it." (*80/04/01*)

Dr. Richard Yensen, 2403 Talbot Road, Baltimore, MD 21216: "LOVE screen interactive features of UCSD Pascal. We need an interchange format for screen control on different CRT terminals." (*80/05/06*)

PPPPPP
P P
P P
PPPPPP
P
P
P ASCAL IN THE NEWS

JOBS:

(* Note--these listings are intended primarily to show that there are indeed openings for Pascal programmers "out there". By the time you see these listings, the jobs may well be filled. *)

Allen-Bradley, 747 Alpha Drive, Highland Heights, OH 44143, wants software engineers to "apply your software experience - assembly languages, PASCAL, FORTRAN" on a VAX 11/780, DEC 11/34 or TEKTRONIX Development system. (*80/04/24*)

Control Data Corporation, 4201 N. Lexington Ave., Arden Hills, MN 55112 is looking for diagnostic engineers to "utilize both..hardware and softare

aptitudes...in maintenance software systems development and PASCAL applications programming."

Medtronic, Inc. 3055 Old Highway Eight, P.O. Box 1453, Minneapolis, MN 55440 "has a position that recognizes your BSEE, and 6-8 years experience with PASCAL-based computer simulation..." (*80/03/24*)

MTS Systems Corp. P.O. Box 24012, Minneapolis, MN 55424 is looking for a software development engineer for products "based upon latest microprocessor technology. PASCAL and assembly language will be used for implementation." (*80/03/10*)

The New York State Legislature, 250 Broadway - 25th Floor, New York NY 10007 wants a demographer, cartographer, and junior programmers. All applicants "should have practical computer programming experience in FORTRAN, COBOL, or PASCAL." (*80/03/10*)

Northern Telecom, P.O. Box 1222, Minneapolis, MN 55440 is looking for a senior programmer/analyst with "high-level programming language (PASCAL, COBOL, BASIC) and compiler writing." (*80/03/24*)

Texas Instruments, P.O. Box 401628, Dallas, TX 75240, has openings in Dallas and Lewisville, Texas, to work "with real-time software applications for mini/micro computer based systems and on distributed computer architectures and uni-processor systems." One of the languages: Pascal.

(* Andy Mickel passed on to me the following Want Ad, which appeared in the March 1980 issue of the Pug Press, published by Maryanne Johnson of Excelsior, MN 55331. It is offered here, verbatim, without further comment... *)

WANTED - Small PUG stud to breed with the Classiest Bitch in Town. Stud must be experienced yet gentle, loving, and discreet. Contact Ron or Marlys Hampe (612)-890-4141

MANUFACTURERS' ADVERTISEMENTS:

(* A lot of these advertisements appear in several publications; this list is gleaned from a "spot check" of several months' worth of magazines and trade journals. Where a product description is much more detailed than the information given here, a reference is provided. *)

Associated Computer Industries, Inc. 17751 Sky Park East, Suite G, Irvine, CA 92714, announced a Pascal Video terminal for use with UCSD Pascal. It accommodates several international languages character displays by internal switch changes, with no optional ROM required. They also sell the ACI-90 Pascal Professional Performance Computer, based on the Western Digital Microengine. Includes the UCSD Pascal operating system, and business software: General Ledger, Accounts Payable, Accounts Receivable, Payroll, and Order Entry Inventory.

Hewlett-Packard Data Systems Division, Dept. 370, 1100 Wolfe Road, Cupertino, CA 95014 offers Pascal for the HP/1000 computer; it has added double-word integer, double-precision data types, random access I/O, and external

FORTRAN and assembly language capability.

Intel Corporation of Santa Clara now has Pascal for its Intellec development systems, as reported in the Intel Preview of February 1980. It "encompasses the full standard...as defined in Pascal User Manual and Report by Jensen and Wirth", and "...offers several more extensions to the UCSD Standard." The blurb also notes, "The UCSD Pascal implementation has become the industry standard and was the first such implementation of this relatively new programming language." (* The person who sent me this noted, in the margin, "!!!". I agree. *)

Meta Tech, 8672-1 Via Mallorca, La Jolla, CA 92037 advertises Pascal/MT, a compiler running under CPM in 32K bytes or more. Compiles a subset of Pascal into ROMable 8080/Z80 code. Object code costs \$100, source code costs you OEMs \$5000.

North Star, 1440 Fourth St., Berkeley, CA 94710, advertises Pascal for its Horizon system.

Oregon Software, 2340 S.W. Canyon Road, Portland, Oregon 97201 announced OMSI Pascal V1.2 with symbolic debugger and profiler, for any RSTS/E, RT-11, RSX-11, or IAS operating system. (* Computerworld 80/01/28*)

Rational Data Systems, 245 W. 55th St., New York, NY 10019 has Pascal for Data General computers, and also puts out a small Pascal Newsletter. (* And, in my opinion, it looks very nice! *)

Renaissance Systems, Inc., Suite M, 11760 Sorrento Valley Rd., San Diego, CA 92121 offers Proff and Form1, word processing support programs for formatting and printing text files and aiding in document generation. Written in UCSD Pascal, the combination costs \$500. Documentation costs \$25. (* Computerworld 80/01/14 p. 50 *)

SofTech Microsystems, 9494 Black Mountain Road, San Diego, CA 92126, offers UCSD Pascal "with full documentation and support."

Valley Software Inc., 390-6400 Roberts Street, Burnaby, B.C. Canada V5G 4G2 is a systems/design, programming and consulting service offering Pascal compilers for DEC and Data General.

NEWSLETTERS & ARTICLES:

Brown University Computer Center has arranged to lease a new PASCAL compiler developed at the University of Waterloo; it is the PASCAL described in the British Standards Institute DPS/14/3 Working Draft/3...it offers extended I/O capabilities to allow convenient access to CMS files. (* March 1980 *)

The Institute for Information Systems, Mail Code C-021, University of California at San Diego, La Jolla, CA 92093 is publishing newsletters describing the UCSD Pascal System.

Mr. Jim McCord sends a "UCSD Pascal Hobby Newsletter #1." (* Sorry, I have no address on this; could someone out there please provide it? *)

The University of Michigan Computing Center presented a short course on Pascal this April. In the blurb, the newsletter states that..."Pascal offers significant advantages over other languages for general purpose programming." (*80/03/19*)

(* Ah-ha! Here's the article that answers just about all of the "can I get a version of Pascal for my [fill- in-the-blank] microcomputer?" questions. *)

Mini-Micro Systems April 1980 Issue has a lengthy article (pp. 89-110) entitled "High-level languages for microcomputers", by Mokurai Cherlin. Along with the article is a table of microcomputer high-level language suppliers; there are over 40 suppliers of Pascal for fifteen different chips.

The Northwestern University newsletter announced the arrival of the Pascal Release 3 compiler for the Cyber, with compiler options for selecting run-time tests and post-mortem dumps; and defining file buffer and central memory sizes. (*April 1980*)

The University of Southern California is forming a Users Group for PASCAL and ALGOL users. (*February 1980*)

GGGGG
G G
G
G GGG
G G
G G
GGGGG OSSIP

Commodore displayed a version of Pascal for their PET personal computer at NCC. The compiler was developed in Great Britain.

While at NCC, I heard a rumor that someone is developing a version of Pascal for the Atari 800 personal computer.

I have seen an advert [in Japanese, unfortunately, so I can't give details] for UCSD Pascal for the NEC PC-8000 personal computer, which has colour graphics. The PC-8000 has been on the market in Japan for some months now, and it appears they may be marketing in the U.S. by year's end.

There was a session on Pascal at NCC, according to one of the attendees, it was fairly interesting. He said Ken Bowles spent some of his speaking time trying to defend his position re UCSD Pascal and Softech. Those who are interested in this subject may wish to take a look at past issues of INFOWORLD. Adam Osborne recently wrote a column which seems to address the issue quite objectively and unemotionally. (* NO, I am NOT going to say what I think of the whole thing. Mom always told me not to discuss religion

and politics. *)

The Canadian Information Processing Society held their "Session '80" in Victoria, British Columbia in early May. A good time was had by all. While working the booth for Apple, I noticed that most of the people from universities had an interest in Pascal or were using it in their classes. The business community was aware of Pascal, more so than they may have been in the past, but didn't seem to be as familiar with its capabilities and wide usage. (* Unabashed plug: Victoria is a very beautiful city, and all the people I met were very friendly. It was great. *)

Rick Shaw, Editor

Pascal News

6 August, 1980

Digital Equipment Corporation

Atlanta, Georgia

Mr. Shaw:

Enclosed is a copy of "A Pascal Bibliography (June 1980)". Although it excludes references to articles on Pascal appearing in magazines such as BYTE and Datamation, it may be of some interest to your readers. (* See Page 12 -ed. *)

If anyone wishes to inform me of errors or omitted articles, I would be grateful to hear from him.

Respectfully,



David V. Moffat

Department of Computer Science
North Carolina State University
Raleigh, North Carolina 27650

BOOKS ABOUT PASCAL

(* This is a complete listing of all known books about Pascal *)

- Alagic, S. and M. S. Arbib, The Design of Well-Structured and Correct Programs, Springer-Verlag, 1978, 292 pages, \$12.80.
- Bowles, K. L., Microcomputer Problem Solving Using Pascal, Springer-Verlag, 1977, 563 pages, \$9.80.
- Bowles, K. L., Beginner's Guide for the UCSD Pascal System, Byte Books, 1980, \$11.95.
- Brinch-Hansen, P., The Architecture of Concurrent Programs, Prentice-Hall, 1977, \$22.00.
- Coleman, D., A Structured Programming Approach to Data, MacMillan Press, London, 1978, 222 pages.
- Conway, R. W., Gries, D. and E. C. Zimmerman, A Primer on Pascal, Winthrop Publishers, 1976, 433 pages.
- Conway, R., Archer, J. and R. Conway, Programming for Poets: A Gentle Introduction Using Pascal, Winthrop Publishers, 1979, 352 pages, \$11.95.
- Findlay, B. and D. Watt, Pascal: An Introduction to Methodical Programming, Computer Science Press (UK Edition by Pitman International), 1978.
- Grogono, P., Programming in Pascal, Addison-Wesley, 1978, 359 pages, \$11.50.
- Hartmann, A. C., A Concurrent Pascal Compiler for Minicomputers, Springer-Verlag Lecture Notes in Computer Science, No. 50, 1977, \$8.40.
- Jensen, K. and N. Wirth, Pascal User Manual and Report, Springer-Verlag Lecture Notes in Computer Science, No. 18, 2nd Edition, 1975, 167 pages, \$6.80.
- Kieburtz, R. B., Structured Programming and Problem-Solving with Pascal, Prentice-Hall, 1978, 365 pages, \$12.95.
- Ledgard, H. F. and J. F. Hueras, Pascal With Style: Programming Proverbs, Heyden, 1980, 224 pages, \$6.95.
- Liffick, B. W. (Ed), The BYTE Book of Pascal, Byte Books, 1980, 342 pages, \$25.00.
- Rohl, J. S. and H. J. Barrett, Programming via Pascal, Cambridge University Press, in press.
- Schneider, G. M., Weingart, S. W. and D. M. Perlman, An Introduction to Programming and Problem Solving with Pascal, Wiley and Sons, 1978, 394 pages.
- Webster, C. A. G., Introduction to Pascal, Heyden, 1976, 152 pages, \$11.00.



Wegner, P., Programming with ADA: An Introduction by Means of Graduated Examples, Prentice-Hall, 1980, 211 pages.

Welsh, J. and J. Elder, Introduction to Pascal, Prentice-Hall, in press.

Wilson, I. R. and A. M. Addyman, A Practical Introduction to Pascal, Springer-Verlag, 1978, 144 pages, \$7.90.

Wirth, N., Systematic Programming: An Introduction, Prentice-Hall, 1973, 169 pages, \$10.50.

Wirth, N., Algorithms + Data Structures = Programs, Prentice-Hall, 1976, 366 pages, \$20.95.

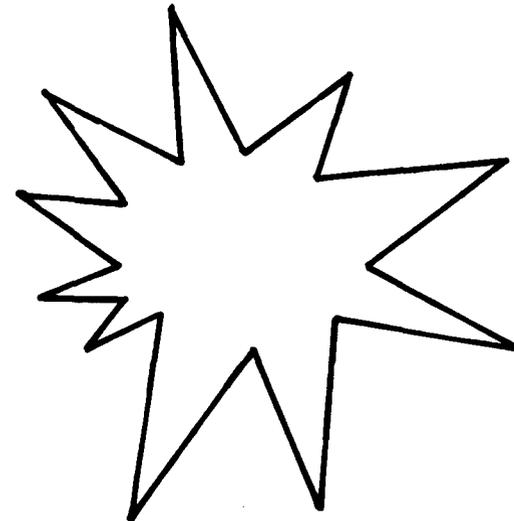

ARTICLES ABOUT PASCAL

(* These articles have appeared since the preparation of #17. *)

- Addyman, A. M., "A Draft Proposal for Pascal", SIGPLAN Notices, Vol. 15, No. 4, April 1980.
- Addyman, A. M., "Pascal Standardization", SIGPLAN Notices, Vol. 15, No. 4, April 1980.
- Baker, Henry G., "A Source of Redundant Identifiers in Pascal Programs", SIGPLAN Notices, Vol. 15, No. 2, Feb. 1980.
- Bond, Reford, "Another Note on Pascal Indentation", SIGPLAN Notices, Vol. 14, No. 12, Dec. 1979.
- Bron, C. and E. J. Dijkstra, "A Discipline for the Programming of Interactive I/O in Pascal", SIGPLAN Notices, Vol. 14, No. 12, Dec. 1979.
- Byrnes, John L., "NPS-Pascal: A Pascal Implementation for Microprocessor-Based Computer Systems", Naval Postgraduate School, June 1979, 283 pages, NTIS Report AD-A071 972/4WC.
- Cichelli, Richard J., "Pascal-1 - Interactive, Conversational Pascal-S", SIGPLAN Notices, Vol. 15, No. 1, Jan. 1980.
- Cichelli, Richard J., "Fixing Pascal's I/O", SIGPLAN Notices, Vol. 15, No. 5, May 1980.
- Cornelius, B. J., Robson, D. J. and M. I. Thomas, "Modification of the Pascal-P Compiler for a Single-accumulator One-address Minicomputer", Software - Practice and Experience, Vol. 10, 241-246, 1980.
- Kaye, Douglas R., "Interactive Pascal Input", SIGPLAN Notices, Vol. 15, No. 1, Jan. 1980.
- Ljungkvist, Sten, "Pascal and Existing Fortran Files", SIGPLAN Notices, Vol. 15, No. 5, May 1980.
- Luckham, David C. and Norihisa Suzuki, "Verification of Array, Record and Pointer Operations in Pascal", ACM Transactions on Programming Languages and Systems, Vol. 1, No. 2, Oct. 1979.
- Luckham, D. C., German, S. M., Henke, F. W. V., Karp, R. A. and P. W. Milne, "Stanford Pascal Verifier User Manual", Stanford Univ. Dept. of Computer Science, Mar. 1979, 121 pages, NTIS Report AD-A071 900/5WC.
- Machura, Marek, "Implementation of a Special-Purpose Language Using Pascal Implementation Methodology", Software-Practice and Experience, Vol. 9, 931-945, 1979.
- Mateti, P., "Pascal Versus C: A Subjective Comparison", Proceedings of the Symposium on Language Design and Programming Methodology, Sydney, Australia, Sept. 1979.
- Mattsson, Sven Erik, "Implementation of Concurrent Pascal on LSI-11", Software - Practice and Experience, Vol. 10, 205-217, 1980.
- Runciman, Colin, "Scarcely Variabed Programming & Pascal", SIGPLAN Notices, Vol. 14, No. 11, Nov. 1979.
- Sale, Arthur, "Miniscules and Majuscules", Software - Practice and Experience, Vol. 9, 915-919, 1979.
- Shimasaki, M., Fukaya, S., Ikeda, K. and T. Kiyono, "An Analysis of Pascal Programs in Compiler Writing", Software - Practice and Experience, Vol. 10, 149-157, 1980.
- Shrivastava, S. K., "Concurrent Pascal with Backward Error Recovery: Language Features and Examples", Software - Practice and Experience, Vol. 9, 1001-1020, 1979.
- Shrivastava, S. K., "Concurrent Pascal with Backward Error Recovery: Implementation", Software - Practice and Experience", Vol. 9, 1021-1033, 1979.
- Simpson, D., "Structured Programming and the Teaching of Computing: Experience With Pascal", Sheffield City Polytechnic Dept. of Computer Studies, Sheffield, England, 1979.
- Sites, Richard L. and Daniel R. Perkins, "Universal P-Code Definition, Version (0.3)", Univ. of California at San Diego Dept. of Electrical Engineering, July 1979, 45 pages, UCSD/CS-79/037, NTIS PB-298 577/9WC.
- Smith, G. and R. Anderson, "LSI-11 Writable Control Store Enhancements to UCSD Pascal", Lawrence Livermore Labs, Oct 1978, 112 pages, UCRL-81808 (Sup), NTIS UCID-19046.
- Wegner, Peter, "Programming with ADA: An Introduction by Means of Graduated Examples", SIGPLAN Notices, Vol. 14, No. 12, Dec. 1979.
- Welsh, J. and D. W. Bustard, "Pascal-Plus - Another Language for Modular Multiprogramming", Software - Practice and Experience, Vol. 9, 947-957, 1979.
- Wirth, Nicklaus, "The Module: A System Structuring Facility in High Level Programming Languages", Proceedings of the Symposium on Language Design and Programming Methodology, Sydney, Australia, Sept. 1979.

A PASCAL BIBLIOGRAPHY
(June, 1980)

David V. Moffat
North Carolina State University
Faleigh, North Carolina

- [1] A. M. Addyman, "On the Suitability of a Pascal Compiler in an Undergraduate Environment", Pascal Newsletter, 6, 35-36 (November 1976)
- [2] A. M. Addyman, et al., "The BSI/ISO Working Draft of Standard Pascal by the BSI DPS/13/4 Working Group", Pascal News, 14 (entire issue), (January 1979)
- [3] A. M. Addyman, et al., "A Draft Description of Pascal", Software-- Practice and Experience, 9, 381-424 (1979)
- [4] A. M. Addyman, "A Draft Proposal for Pascal", SIGPLAN Notices, 15, 4, 1-66 (1980)
- [5] A. M. Addyman, "Pascal Standardisation", SIGPLAN Notices, 15, 4, 67-69 (1980)
- [6] A. M. Addyman, "A Draft Proposal for Pascal", Pascal News, 18, 2-70 (May 1980)
- [7] L. Aiello, M. Aiello and R. W. Weyhrauch, The Semantics of Pascal in LCE, Stanford University (August 1974)
- [8] S. Alagic and M. A. Arbib, The Design of Well Structured and Correct Programs, Springer-Verlag, New York (1978)
- [9] A. L. Ambler and C. G. Hoch, "A Study of Protection in Programming Languages", SIGPLAN Notices, 12, 3, 25-40 (1977)
- [10] U. Ammann, "The Method of Structured Programming Applied to the Development of a Compiler", International Computing Symposium 1973, Gunther, et al., eds., 93-99, North Holland (1974)
- [11] U. Ammann, "On Code Generation in a Pascal Compiler", Software-- Practice and Experience, 7, 391-423 (1977)
- [12] U. Ammann, "Error Recovery in Recursive Descent Parsers", ETH Zurich, Berichte des Instituts fur Informatik, No. 25 (May 1978)
- [13] K. R. Apt, "Equivalence of Operational and Denotational Semantics for a Fragment of Pascal", Proceedings of the IFIP Working Conference on Formal Descriptions of Programming Concepts, St. Andrews, Canada, August, 1977, 139-63, North-Holland, Amsterdam (1978)
- [14] K. R. Apt and J. W. De Bakker, "Semantics and Proof Theory of Pascal Procedures", (Preprint), Mathematics Center, Department of Computer Science, Amsterdam (1977)
- [15] J. Q. Arnold, "A Novel Approach to Compiler Design", Pascal News, 11, 34-36 (February 1978)
- [16] L. V. Atkinson, "Know the State You Are In", Pascal News, 13, 66-69 (December 1978)
- [17] L. V. Atkinson, "Pascal Scalars as State Indicators", Software-- Practice and Experience, 9, 427-431 (1979)
- [18] L. Atkinson, "A Contribution to Minimal Subranges", Pascal News, 15, 60-61 (September 1979)
- [19] J. W. Atwood and T. M. Pham, "A Concurrent Pascal Interpreter for the Texas Instruments 980B", Proceedings of the International Symposium on Mini and Micro Computers, Montreal, Canada, November, 1977, 41-48, IEEE (1978)
- [20] B. Austermuehl and H.-J. Hoffman, "Generic Routines and Variable Types in Pascal", Pascal News, 9 & 10, 43-46 (September 1977)
- [21] H. G. Baker, Jr., "A Source of Redundant Identifiers in Pascal Programs", SIGPLAN Notices, 15, 2, 14-16 (1980)
- [22] T. P. Baker and A. C. Fleck, "Does Scope=Block in Pascal?", Pascal News, 17, 60-61 (March 1980)
- [23] T. P. Baker and A. C. Fleck, "A Note on Pascal Scopes", Pascal News, 17, p.62 (March 1980)
- [24] M. S. Ball, Pascal 1100: An Implementation of the

- Pascal Language for Univac 1100 Series Computers, Naval Ocean Systems Center, San Diego (July 1978)
- [25] D. Bar, "A Methodology for Simultaneously Developing and Verifying Pascal Programs", Constructing Quality Software, Novsibirsk, USSR, May, 1977, 419-48, North-Holland, Amsterdam, Netherlands (1978)
- [26] W. Barabesh, C. R. Hill, and R. B. Kieburz, "A Proposal for Increased Security in the Use of Variant Records", Pascal Newsletter, 8, 15-15 (May 1977)
- [27] D. Barron, "On Programming Style, and Pascal", Computer Bulletin, 2, 21, (September 1979)
- [28] D. W. Barron and J. M. Mullins, "What to do After a While", Pascal News, 11, 48-50 (February 1978)
- [29] D. W. Barron and J. M. Mullins, "Life, Liberty and the Pursuit of Unformatted Input", Pascal Newsletter, 7, 8-9 (February 1977)
- [30] D. W. Barron and J. Mullins (eds.), "Pascal, The Language and Its Implementation", Proceedings of the Southampton Symposium, University of Southampton, 24-25 March 1977 (1977)
- [31] D. Bates, Letter to the Editor (on formatting Pascal programs), SIGPLAN Notices, 13, 3, 12-15 (1978)
- [32] D. Bates and R. Cailliau, "Experience with Pascal Compilers on Mini-Computers", SIGPLAN Notices, 12, 11, 10-22 (1977)
- [33] D. Bates and F. Cailliau, NS-Pascal User's Guide, CERN Note PS/CCI 77/3 (1977)
- [34] D. M. Berry, "Pascal or Algol-68?", Research Directions in Software Technology, (P. Wegner, ed.), 641-46, MIT Press, Cambridge Massachusetts (1979)
- [35] R. E. Berry, "Experience with the Pascal P-Compiler", Software-- Practice and Experience, 8, 617-627 (1978)
- [36] A. Biedl, "An Extension of Programming Languages for Numerical Computation in Science and Engineering with Special Reference to Pascal", SIGPLAN Notices, 12, 4, 31-33 (1977)
- [37] C. Bishop, "Some Comments on Pascal I/O", Pascal Newsletter, 8, 18-18 (May 1977)
- [38] C. Bishop, "Pascal: Standards and Extensions", Pascal News, 11, 54-56 (February 1978)
- [39] J. M. Bishop, "Subranges and Conditional Loops", Pascal News, 12, 37-38 (June 1978)
- [40] J. M. Bishop, "On Publication Pascal", Software-- Practice and Experience, 9, 711-717 (1979)
- [41] J. M. Bishop, "Implementing Strings in Pascal", Software-- Practice and Experience, 9, 779-788 (1979)
- [42] R. Bond, "Another Note on Pascal Indention", SIGPLAN Notices, 14, 12, 47-49 (1979)
- [43] T. M. Bonham, "'Minor' Problems in Pascal", Pascal Newsletter, 5, 20-22 (September 1976)
- [44] H. J. Boom and E. DeJong, "A Critical Comparison of Several Programming Languages", Software-- Practice and Experience, 10, 435-473 (1980)
- [45] M. Boot, "Comparable Computer Languages for Linguistic and Literary Data Processing, II: SIMULA and Pascal", Association for Literary and Linguistic Computing Bulletin, 7, 2, 137-46 (1979)
- [46] K. L. Bowles, Microcomputer Problem Solving Using Pascal, Springer Verlag, New York (1977)
- [47] K. L. Bowles, "Update on UCSD Pascal Activities", Pascal Newsletter, 8, 16-18 (May 1977)
- [48] K. L. Bowles, "An Introduction to the UCSD Pascal System", Behavioral Research Methods and Instruments, 10, 4, 531-4 (1978)
- [49] K. L. Bowles, "Status of UCSD Project", Pascal News, 11, 36-40 (February 1978)
- [50] K. L. Bowles, Beginner's Guide for the UCSD Pascal System, BYTE/McGraw-Hill (1979)
- [51] P. Brinch Hansen, "Universal Types in Concurrent Pascal", Information Processing Letters, 3, 165-166 (1975)
- [52] P. Brinch Hansen, "Concurrent Pascal, A Programming Language for Operating Systems Design", Technical Report 10, Information Science, California Institute of Technology (April 1974)
- [53] P. Brinch Hansen, "The Purpose of Concurrent Pascal", SIGPLAN Notices, 10, 6, 305-309 (1975)
- [54] P. Brinch Hansen, "The Programming Language Concurrent Pascal", IEEE Transactions on Software

- Engineering, 1, No. 2, 199-207 (1975)
- [55] P. Brinch Hansen, "Experience With Modular Concurrent Programming", IEEE Transactions on Software Engineering, 3, 2, 156-159 (1977)
- [56] P. Brinch Hansen, The Architecture of Concurrent Programs, Prentice Hall, Englewood Cliffs, New Jersey (1977)
- [57] P. Brinch Hansen, "Concurrent Pascal Machine", Information Science, California Institute of Technology (1975)
- [58] P. Brinch Hansen, "The SOLO Operating System: A Concurrent Pascal Program", Software-- Practice and Experience, 9, 141-149 (1976)
- [59] P. Brinch Hansen and A. C. Hartman, "Sequential Pascal Report", Technical Report, Information Science, California Institute of Technology (1975)
- [60] P. Brinch Hansen, "Microcomputer Comparison", Software-- Practice and Experience, 9, 211-217 (1979)
- [61] C. Bron and W. de Vries, "A Pascal Compiler for PDP-11 Minicomputers", Software-- Practice and Experience, 9, 1, 109-116 (1976)
- [62] C. Bron and E. J. Dijkstra, "A Discipline for the Programming of Interactive I/O in Pascal", SIGPLAN Notices, 14, 12, 59-61 (1979)
- [63] D. M. Bulman, "Stack Computers", Computer, (May 1977)
- [64] W. F. Burger, Parser Generation for Micro-Computers, TR-77, Department of Computer Sciences, University of Texas at Austin (March 1978)
- [65] W. F. Burger and D. Lynch, Pascal Manual, Computer Center of the State University of New York at Buffalo, Buffalo (1973)
- [66] D. W. Bustard, Pascal-Plus User's Manual, Queen's University of Belfast (1978)
- [67] J. L. Byrnes, NPS-Pascal: A Pascal Implementation for Microprocessor Based Computer Systems, Naval Postgraduate School, Monterey, California (1979)
- [68] K. H. Campbell and R. B. Kolstad, "Path Expressions in Pascal", Proceedings of the 4th International Conference of Software Engineering, Munich, Germany, IEEE, New York (1979)
- [69] A. Celentano, P. Della Vigna, C. Ghezzi, and D. Mandrioli, "Modularization of Block-Structured Languages: The Case of Pascal", Proceedings of the Workshop on Reliable Software, Bonn, Germany, 167-79, Carl Hanser Verlag, Munich (1979)
- [70] A. Celentano, P. Della Vigna, C. Ghezzi, and D. Mandrioli, "Separate Compilation and Partial Specification in Pascal", IEEE Transactions on Software Engineering, SE-6, 4, 320-328 (1980)
- [71] A. Celentano, P. Della Vigna, C. Ghezzi, and D. Mandrioli, "SIMPLE: A Program Development System", Computer Languages, 5, 2, 103-114 (1980)
- [72] G. W. Cherry, Pascal Programming Structures: An Introduction to Systematic Programming, Reston Publishing, Reston, Virginia (1980)
- [73] R. Cichelli, "Pascal-I-- Interactive, Conversational Pascal-S", Pascal News, 15, 63-67 (September 1979)
- [74] R. Cichelli, "Pascal-I-- Interactive, Conversational Pascal-S", SIGPLAN Notices, 15, 1, 34-44 (1980)
- [75] R. J. Cichelli, "Pascal Potpourri", Pascal Newsletter, 6, 36-41 (November 1976)
- [76] R. J. Cichelli, "Fixing Pascal's I/O", SIGPLAN Notices, 15, 5, p.19 (1980)
- [77] R. J. Cichelli, "Fixing Pascal's I/O", Pascal News, 17, p.65 (March 1980)
- [78] R. G. Clark, "Interactive Input In Pascal", SIGPLAN Notices, 14, 2, 9-13 (1979)
- [79] R. G. Clark, "Input in Pascal", SIGPLAN Notices, 14, 11, 7-8 (1979)
- [80] D. Coleman, A Structured Programming Approach to Data, MacMillan Press (1978)
- [81] D. Coleman, R. M. Gallimore, J. W. Hughes, and M. S. Powell, "An Assessment of Concurrent Pascal", Software-- Practice and Experience, 9, 827-837 (1979)
- [82] D. Coleman, J. W. Hughes and M. S. Powell, "Developing a Programming Methodology for Multiprograms", Department of Computation Report No. 218, UMIST (1978)
- [83] E. Comer, "MAP: A Pascal Macro Preprocessor for Large Program Development", Software-- Practice and

- Experience, 2, 203-209 (1979)
- [84] M. N. Condict, "The Pascal Dynamic Array Controversy and a Method for Enforcing Global Assertions", SIGPLAN Notices, 12, 11, 23-27 (1977)
- [85] R. Conradi, "Further Critical Comments on Pascal, Particularly as a Systems Programming Language", SIGPLAN Notices, 11, 11, 8-25 (1976)
- [86] R. Conway, J. Archer, and R. Conway, Programming for Poets: A Gentle Introduction Using Pascal, Winthrop, Englewood Cliffs, New Jersey (1980)
- [87] R. Conway, D. Gries and E. C. Zimmerman, A Primer on Pascal, Winthrop, Cambridge, Massachusetts (1976)
- [88] B. J. Cornelius, D. J. Robson, and M. I. Thomas, "Modification of the Pascal-P Compiler for a Single-Accumulator One-Address Minicomputer", Software--Practice and Experience, 10, 241-46 (1980)
- [89] G. Cox and J. Tobias, Pascal 8000 Reference Manual (IBM 360/370 Version), Australian Atomic Energy Commission, Australia (February 1978)
- [90] J. E. Crider, "Structured Formatting of Pascal Programs", SIGPLAN Notices, 13, 11, 15-22 (1978)
- [91] J. Crider, "Why Use Structured Formatting", Pascal News, 15, 68-70 (September 1979)
- [92] J. Deminet and J. Wisniewska, "SIMPASCAL", Pascal News, 17, 66-68 (March 1980)
- [93] P. Desjardins, "A Pascal Compiler for the Xerox Sigma 6", SIGPLAN Notices, 8, 6, 34-36 (1973)
- [94] P. Desjardins, "Dynamic Data Structure Mapping", Software--Practice and Experience, 4, 155-162 (1974)
- [95] P. Desjardins, "Type Compatibility Checking in Pascal Compilers", Pascal News, 11, 33-34 (February 1978)
- [96] R. S. Deverill and A. C. Hartmann, "Interpretive Pascal for the IBM 370", Information Science Technical Report No. 6, California Institute of Technology (1973)
- [97] F. Edwards, "Is Pascal a Logical Subset of Algol 68 or Not?", SIGPLAN Notices, 12, 6, 184-191 (1977)
- [98] J. Eisenberg, "In Defense of Formatted Input", Pascal Newsletter, 5, 14-15 (september 1976)
- [99] H. Erkio, J. Sajanienu, and A. Salava, "An Implementation of Pascal on the Burroughs B6700", Report A-1977-1, Department of Computer Science, University of Helsinki, Finland (1977)
- [100] R. N. Faiman and A. A. Kortesoja, "An Optimizing Pascal Compiler", Proceedings of COMPSAC (IEEE Third International Computer Software and Applications Conference), IEEE, 624-28 (1979)
- [101] L. Feiereisen, "Implementation of Pascal on the PDP-11/45", DECUS Conference, Zurich, pp. 259 (1974)
- [102] E. E. Ferguson and G. T. Lijler, "The TI Pascal System: Run-Time Support", Proceedings of the Eleventh Hawaii International Conference on System Sciences, Part III, 69-84, Western Periodicals Co., North Hollywood, California (1978)
- [103] W. Findlay, "The Performance of Pascal Programs on the MULTUM", Report No. 6, Computing Department, University of Glasgow, Scotland (July 1974)
- [104] W. Findlay and D. F. Watt, Pascal: An Introduction to Methodical Programming, Pittman, London (1978)
- [105] C. N. Fischer and R. J. LeBlanc, UW-Pascal Reference Manual, Madison Academic Computing Center, Madison, Wisconsin (October 1977)
- [106] C. N. Fischer and R. J. LeBlanc, "Efficient Implementation and Optimisation of Run-time Checking in Pascal", SIGPLAN Notices, 12, 3, 19-24 (1977)
- [107] C. N. Fischer and R. J. LeBlanc, "A Diagnostic Compiler for the Programming Language Pascal", USE Fall Conference Technical Papers, Lake Buena Vista, Florida (October 1976)
- [108] C. N. Fischer and R. J. LeBlanc, "The Implementation of Run-Time Diagnostics in Pascal", IEEE Transactions on Software Engineering, SE-6, 4, 313-319 (1980)
- [109] R. A. Fraley, "Suggested Extensions to Pascal", Pascal News, 11, 41-48 (February 1978)
- [110] R. A. Fraley, "SYSPAL: A Pascal-Based Language for Operating System Implementations", Proceedings of Spring Compucon 78, San Francisco, 32-35, IEEE (1978)
- [111] G. Friesland, et al., "A Pascal Compiler Bootstrapped on a DEC-System 10", Mitteilung Nr. 5, Institut für Informatik der Universität Hamburg, 13 (March 1974)

- [112] A. J. Gerber, "Pascal at Sydney University", Pascal News, 9 & 10, 39-40 (September 1977)
- [113] J. C. Gracida and R. R. Stilwell, NPS-Pascal. A Partial Implementation of Pascal Language for a Microprocessor-Based Computer System, AD-A061040/2 Naval Postgraduate School (June 1978)
- [114] N. Graef, H. Kretschmar, K. P. Loehr, and B. Morawetz, "How to Design and Implement Small Time-sharing Systems Using Concurrent Pascal", Software-- Practice and Experience, 9, 17-24 (1979)
- [115] N. Graham, Introduction to Pascal, West, St. Paul, Minnesota (1980)
- [116] D. Gries and N. Gehani, "Some Ideas on Data Types in High Level Languages", CACM 20, 6, 414-420 (1977)
- [117] G. R. Grinton, "Converting an Application Program from OMSI Pascal 1.1F to AAEC Pascal 8000/1.2", Pascal News, 17, p.59 (March 1980)
- [118] P. Grogono, "On Layout, Identifiers and Semicolons in Pascal Programs", SIGPLAN Notices, 14 4, 35-40 (1976)
- [119] P. Grogono, Programming in Pascal, Addison-Wesley, Reading, Mass. (1978, revised 1980)
- [120] C. C. Grosse-Lindemann, P. W. Lorenz, H. H. Nagel, and P. J. Stirl, "A Pascal Compiler Bootstrapped on a DEC-System 10", Lecture Notes in Computer Science 3, Springer-Verlag (1974)
- [121] C. O. Grosse-Lindemann and H. H. Nagel, "Postlude to a Pascal-Compiler Bootstrapped on a DEC-System 10", Software-- Practice and Experience, 6, 29-42 (1976)
- [122] T. R. Grove, Waterloo Pascal User's Guide and Language Description, University of Waterloo, Ontario (January 1980)
- [123] G. G. Gustafson, "Some Practical Experiences Formatting Pascal Programs", SIGPLAN Notices, 14, 9, 42-49 (1979)
- [124] A. N. Habermann, "Critical Comments on the Programming Language Pascal", ACTA Informatica, 3, 47-57 (1973)
- [125] M. P. Hagerty, "The Case for Extending Pascal's I/O", Pascal Newsletter, 6, 42-45 (November 1976)
- [126] G. J. Hansen and C. E. Lindahl, Preliminary Specification of Real-time Pascal, Florida University (July 1976)
- [127] G. J. Hansen, G. A. Shoults, and J. D. Cointment, "Construction of a Transportable, Multi-Pass Compiler for Extended Pascal", SIGPLAN Notices, 14, 8, 117-26 (1979)
- [128] S. Hanson, E. Jullig, P. Jackson, P. Levy, and T. Pittman, "Summary of the Characteristics of Several "Modern" Programming Languages", SIGPLAN Notices, 14, 5, 28-45 (1979)
- [129] A. C. Hartman, "A Concurrent Pascal Compiler for Minicomputers", Lecture Notes in Computer Science, 50, Springer-Verlag, New York (1977)
- [130] D. Heimbigner, "Writing Device Drivers in Concurrent Pascal", SIGOPS, 11 (1978)
- [131] E. Heistad, "Pascal-- Cyber Version", Teknisk Notat S-305 Forsvarets Forskningsinstitutt, Norwegian Defense Research Establishment, Kjeller, Norway (June 1973)
- [132] F. W. v. Henke and D. C. Luckham, Automatic Program Verification III: A Methodology for Verifying Programs, Stanford University (December 1974)
- [133] T. Hikita and K. Ishihata, "Pascal 8000 Reference Manual", Technical Report 76-02, Department of Information Science, Faculty of Science, University of Tokyo (March 1976)
- [134] T. Hikita and K. Ishihata, "An Extended Pascal and Its Implementation Using a Trunk", Report of the Computer Centre, 5, 23-51, University of Tokyo, (1976)
- [135] C. A. R. Hoare and N. Wirth, "An Axiomatic Definition of the Programming Language Pascal", ACTA Informatica, 2, 335-355 (1973)
- [136] R. C. Holt and J. N. P. Hume, Programming Standard Pascal, Reston Publishing Co., Reston, Virginia (1980)
- [137] J. Hueras and H. Ledgard, "An Automatic Formatting Program for Pascal", SIGPLAN Notices, 12, 7, 82-84 (1977)
- [138] M. Iglewski, J. Madey and S. Matwin, "A Contribution to an Improvement of Pascal", SIGPLAN Notices, 13, 1, 48-58 (1978)
- [139] T. Irish, "What to do After a While... Longer",

- Pascal News, 13, 65-65 (December 1978)
- [140] K. Ishihata and T. Hikita, Bootstrapping Pascal Using a Trunk, Department of Information Science, Faculty of Science, University of Tokyo (1976)
- [141] Ch. Jacobi, "Dynamic Array Parameters", Pascal Newsletter, 5, 23-25 (September 1976)
- [142] K. Jensen, and N. Wirth, "Pascal-- User Manual and Report", Lecture Notes in Computer Science, 18, Springer-Verlag, New York (1974)
- [143] K. Jensen, and N. Wirth, Pascal-- User Manual and Report, Springer-Verlag, New York (1974)
- [144] O. G. Johnson, "A Generalized Instrumentation Procedure for Concurrent Pascal Systems", Proceedings of the 1979 International Conference on Parallel Processing, 205-7, IEEE (1979)
- [145] D. A. Joslin, "A Case for Acquiring Pascal", Software-- Practice and Experience, 9, 691-2 (1979)
- [146] W. N. Joy, S. L. Graham, and C. B. Haley, Berkeley Pascal User's Manual Version 1.1, Computer Science Division, University of California at Berkeley (April 1979)
- [147] W. H. Kaubisch, R. H. Perrott, and C. A. E. Hoare, "Quasiparallel Programming", Software-- Practice and Experience, 6, 341-356 (1976)
- [148] D. R. Kaye, "Interactive Pascal Input", SIGPLAN Notices, 15, 1, 66-68 (1980)
- [149] W. Kempton, "Suggestions for Pascal Implementations", Pascal News, 11, 40-41 (February 1978)
- [150] R. Kieburtz, Structured Programming and Problem Solving with Pascal, Prentice-Hall, Englewood Cliffs, New Jersey (1977)
- [151] R. B. Kieburtz, W. Barabash and C. R. Hill, "A Type-checking Program Linkage System for Pascal", Proceedings of the Third International Conference on Software Engineering, Atlanta, Georgia, May 10-12 (1978)
- [152] R. B. Kieburtz, W. Barabesh and C. R. Hill, Stony Brook Pascal/360 User's Guide, Department of Computer Science, SUNY, Stony Brook (February 1979)
- [153] E. N. Kittlitz, "Block Statements and Synonyms for Pascal", SIGPLAN Notices, 11, 10, 32-35 (1976)
- [154] E. N. Kittlitz, "Another Proposal for Variable Size Arrays in Pascal", SIGPLAN Notices, 12, 1, 82-86 (1977)
- [155] B. Knobe and G. Yuval, "Some Steps Toward a Better Pascal", Journal of Computer Languages, 1, 277-286 (1976)
- [156] S. Knudsen, "Indexed Files", Pascal Newsletter, 6, 33-33 (November 1976)
- [157] G. A. Korn, "Programming Continuous-System Simulation in Pascal", Mathematics and Computers in Simulation, 21, 276-81 (November 1979)
- [158] B. B. Kristensen, O. L. Madsen and B. B. Jensen, "A Pascal Environment Machine (P-Code)", Daimi PB-28, University of Aarhus, Denmark (April 1974)
- [159] C. Lakos and A. H. J. Sale, "Is disciplined Programming Transferable, and Is It Insightful?", Australian Computer Journal, 10, 3, 87-97 (1978)
- [160] W. R. Lalonde, "The Zero Oversight", SIGPLAN Notices, 14, 7, 3-4 (1979)
- [161] A. R. Lawrence and D. Schofield, "SFS-- A File System Supporting Pascal Files, Design and Implementation", NPL Report NAC 88, National Physics Laboratory (February 1978)
- [162] R. J. LeBlanc, "Extensions to Pascal for Separate Compilation", SIGPLAN Notices, 13, 9, 30-33 (1978)
- [163] R. J. LeBlanc and J. J. Coda, A Guide to Pascal Textbooks, School of Information and Computer Science, Georgia Institute of Technology, Atlanta, Georgia
- [164] O. Lecarme, "Structured Programming, Programming Teaching and the Language Pascal", SIGPLAN Notices, 9, 7, 15-21 (1974)
- [165] O. Lecarme, "Development of a Pascal Compiler for the CII IRIS 50. A Partial History", Pascal Newsletter, 8, 8-11 (May 1977)
- [166] O. Lecarme, "Is Algol 68 a Logical Subset of Pascal or Not?", SIGPLAN Notices, 12, 6, 33-35 (1977)
- [167] O. Lecarme and P. Desjardins, "More Comments on the Programming Language Pascal", ACTA Informatica, 4, 231-244 (1975)

- [168] O. Lecarme and P. Desjardins, "Reply to a Paper by A. N. Habermann on the Programming Language Pascal", SIGPLAN Notices, 9, 21-27 (1974)
- [169] O. Lecarme and M-C. Peyrolle-Thomas, "Self-Compiling Compilers: An Appraisal of their Implementation and Portability", Software-- Practice and Experience, 8, 149-170 (1978)
- [170] L. A. Liddiard, "Yet Another Look at Code Generation for Pascal on CDC 6000 and Cyber Machines", Pascal Newsletter, 7, 17-23 (February 1977)
- [171] B. W. Liffick (ed.), The BYTE Book of Pascal, BYTE/McGraw-Hill (1979)
- [172] S. Ljungkvist, "Pascal and Existing FORTRAN Files", SIGPLAN Notices, 15, 5, 54-55 (1980)
- [173] K. P. Loehr, "Beyond Concurrent Pascal", Proceedings of the Sixth ACM Symposium on Operating System Principles, 173-180 (1977)
- [174] D. C. Luckham, S. M. German, F. W. V. Henke, R. A. Karp, and P. W. Milne, Stanford Pascal Verifier User Manual, STAN-CS-79-731, Department of Computer Science, Stanford University, California (1979)
- [175] D. C. Luckham and N. Suzuki, "Verification of Array, Record, and Pointer Operations in Pascal", ACM TOPLAS, 1, 2, 226-244 (1979)
- [176] W. I. MacGregor, "An Alternate Approach to Type Equivalence", Pascal News, 17, 63-65 (March 1980)
- [177] M. Machura, "Implementation of a Special-Purpose Language Using Pascal Implementation Methodology", Software-- Practice and Experience, 9, 931-945 (1979)
- [178] B. J. MacLennan, "A Note on Dynamic Arrays in Pascal", SIGPLAN Notices, 10, 9, 39-40 (1975)
- [179] C. D. Marlin, "A Model for Data Control in the Programming Language Pascal", Proceedings of the Australian Colleges of Advanced Education Computing Conference, August 1977, (A. K. Duncan, Ed.), 293-306 (1977)
- [180] C. D. Marlin, "A Heap-based Implementation of the Programming Language Pascal", Software-- Practice and Experience, 9, 101-119 (1979)
- [181] E. Marmier, "A Program Verifier for Pascal", Information Processing 74, (IFIP Congress 1974), North-Holland (1974)
- [182] S. E. Mattsson, "Implementation of Concurrent Pascal on LSI-11", Software-- Practice and Experience, 10, 205-217 (1980)
- [183] S. Matwin and M. Missala, "A Simple, Machine Independent Tool for Obtaining Rough Measures of Pascal Programs", SIGPLAN Notices, 11, 8, 42-45 (1976)
- [184] B. A. E. Meekings, "A Further Defence of Formatted Input", Pascal Newsletter, 8, p.11 (May 1977)
- [185] A. Mickel, Pascal Newsletter, University of Minnesota Computer Center, Minneapolis: No. 5 (September 1976), No. 6 (November 1976), No. 7 (February 1977), No. 8 (May 1977). Pascal News (change of name): No. 9 and 10 (September 1977), No. 11 (February 1978), No. 12 (June 1978), No. 13 (December 1978), No. 14 (January 1979), No. 15 (SEPTEMBER 1979), No. 16 (OCTOBER 1979) (See also G. Richmond and R. Shaw)
- [186] D. D. Miller, "Adapting Pascal for the PDP 11/45", Pascal News, 11, 51-53 (February 1978)
- [187] F. Minor, "Overlays: A Proposal", Pascal Newsletter, 5, 16-19 (September 1976)
- [188] D. V. Moffat, "A Categorized Pascal Bibliography (June, 1980)", Technical Report TR80-06, Department of Computer Science, North Carolina State University, Raleigh (1980)
- [189] P. R. Mohilner, "Prettyprinting Pascal Programs", SIGPLAN Notices, 13, 7, 34-40 (1978)
- [190] P. R. Mohilner, "Using Pascal in a FORTRAN Environment", Software-- Practice and Experience, 7, 357-362 (1977)
- [191] T. Molster and V. Sundvor, "Unit Pascal System for the Univac 1108 Computer", Teknisk Notat 1/74, Institutt for Databehandling, Univeritetet i Trondheim, Norway (February 1974)
- [192] H. H. Nagel, "Pascal for the DEC-System 10, Experiences and Further Plans", Mitteilung Nr. 21, Institut für Informatik, Universität Hamburg (November 1975)
- [193] J. Nagle, "A Few Proposed Deletions", Pascal News, 12, 39-39 (June 1978)
- [194] K. T. Narayana, V. R. Prasad, and M. Joseph, "Some

- Aspects of Concurrent Programming in CCNPASCAL", Software-- Practice and Experience, 9, 9, 749-70 (1979)
- [195] D. Neal and V. Wallentine, "Experiences with the Portability of Concurrent Pascal", Software-- Practice and Experience, 8, 341-353 (1978)
- [196] P. A. Nelson, "A Comparison of Pascal Intermediate Languages", SIGPLAN Notices, 14, 8, 208-13 (1979)
- [197] T. Noodt, "Pascal Environment Interface", Pascal News, 12, 35-37 (June 1978)
- [198] T. Noodt and D. Belsnes, "A Simple Extension to Pascal for Quasi-Parallel Processing", SIGPLAN Notices, 15, 5, 56-65 (1980)
- [199] K. V. Nori, U. Ammann, K. Jensen, H. H. Nageli, and Ch. Jacobi, The Pascal "P" Compiler: Implementation Notes (Revised Edition), Berichte Nr. 10, Institut fur Informatik, Eidgenossische Technische Hochschule, Zurich, Switzerland, 1976
- [200] K. V. Nori, U. Ammann, K. Jensen, H. H. Nageli, and Ch. Jacobi, Corrections to the "Pascal Compiler: Implementation Notes", Berichte Nr. 10, Institut fur Informatik, Eidgenossische Technische Hochschule, Zurich, Switzerland, 1976
- [201] G. J. Nutt, "A Comparison of Pascal and FORTRAN as Introductory Programming Languages", SIGPLAN Notices, 13, 2, 57-62 (1978)
- [202] J. S. Parry, "The Pascal String Library Notes", Information Science Student Report, University of Tasmania (1978)
- [203] A. L. Parsons, "A Microcomputer Pascal Cross Compiler", Proceedings of Spring Compcon 78, San Francisco, February-March, 1978, IEEE, 146-50 (1978)
- [204] S. Pemberton, "Comments on an Error-recovery Scheme by Hartmann", Software-- Practice and Experience, 10, 231-240 (1980)
- [205] D. F. Perkins and R. L. Sites, "Machine-Independent Pascal Code Optimization", SIGPLAN Notices, 14, 8, 201-7 (1979)
- [206] G. Persch and G. Winterstein, "Symbolic Interpretation and Tracing of Pascal Programs", 3rd International Conference on Software Engineering, Atlanta, Georgia, May, 1978, IEEE, 312-19 (1978)
- [207] J. L. Peterson, "On the Formatting of Pascal Programs", SIGPLAN Notices, 12, 12, 83-86 (1977)
- [208] S. Pokrovsky, "Formal Types and their Application to Dynamic Arrays in Pascal", SIGPLAN Notices, 11, 10, 36-42 (1976)
- [209] B. W. Pollack and R. A. Fraley, Pascal/UBC User's Guide, Technical Manual TM-2, Department of Computer Science, University of British Columbia (1977)
- [210] M. S. Powell, "Experience of Transporting and Using the SOLO Operating System", Software-- Practice and Experience, 9, 7, 561-569 (1979)
- [211] T. W. Pratt, "Control Computations and the Design of Loop Control Structures", IEEE Transactions on Software Engineering, SE-4, 2 (1978)
- [212] W. C. Price, "What is a Textfile?", Pascal News, 9 & 10, 42-42 (September 1977)
- [213] J. Pugh and D. Simpson, "Pascal Errors-- Empirical Evidence", Computer Bulletin, 2, 19, 26-28 (March 1979)
- [214] F. F. Fansom, "Pascal Survey", Pascal News, 17, 57-58 (March 1980)
- [215] B. W. Ravenel, "Toward a Pascal Standard", IEEE Computer, 12, 4, 68-82 (1979)
- [216] B. W. Ravenel, "Will Pascal be the Next Standard Language?", COMPCON 79 Digest of Papers, IEEE, 144-146 (1979)
- [217] W. Femmele, "Design and Implementation of a Programming System to Support the Development of Reliable Pascal Programs", Proceedings of the Workshop on Reliable Software, Bonn, Germany, 73-87, Carl Hanser Verlag, Munich (1979)
- [218] G. H. Richmond, "Proposals for Pascal", Pascal Newsletter, 8, 12-14 (May 1977)
- [219] G. Richmond (ed.), Pascal Newsletter, University of Colorado Computing Center, Boulder: No. 1 (January 1974), SIGPLAN Notices, 9, 3, 21-28 (1974); No. 2 (May 1974), SIGPLAN Notices, 9, 11, 11-17 (1974); No. 3 (February 1975), SIGPLAN Notices, 11, 2, 33-48 (1976); No. 4 (July 1976) (See also A. Mickel and R. Shaw)
- [220] M. Roberts and R. Macdonald, "A Resolution of the Boolean-Evaluation Question --or-- if not Partial

- Evaluation then Conditional Expressions", Pascal News, 13, 63-65 (December 1978)
- [221] P. Roy, "Linear Flowchart Generator for a Structured Language", SIGPLAN Notices, 11, 11, 58-64 (1976)
- [222] H. Rubenstein, "Pascal Printer Plotter", Pascal Newsletter, 7, 9-16 (February 1977)
- [223] A. Rudmik, "Compiler Design for Efficient Code Generation and Program Optimization", SIGPLAN Notices, 14, 8, 127-38 (1979)
- [224] C. Runciman, "Scarcely Variabled Programming and Pascal", SIGPLAN Notices, 14, 11, 97-106 (1979)
- [225] A. H. J. Sale, "Stylistics in Languages with Compound Statements", Australian Computer Journal, 10, 2 (1978)
- [226] A. H. J. Sale, "Strings and the Sequence Abstraction in Pascal", Software-- Practice and Experience, 9, 671-683 (1979)
- [227] A. H. J. Sale, "Implementing Strings in Pascal--Again", Software-- Practice and Experience, 9, 839-841 (1979)
- [228] A. H. J. Sale, "A Note on Scope, One-Pass Compilers, and Pascal", Australian Computer Sciences Communications 1, 1, 80-82 (1979)
- [229] A. H. J. Sale, "Conformant Arrays in Pascal", Pascal News, 17, 54-56 (March 1980)
- [230] A. Sale, "A Note on Scope, One-pass Compilers, and Pascal", Pascal News, 15, 62-63 (September 1979)
- [231] A. Sale, "The Pascal Validation Suite-- Aims and Methods", Pascal News, 16, 5-9 (October 1979)
- [232] A. Sale, "Scope and Pascal", SIGPLAN Notices, 14, 9, 61-63 (1979)
- [233] A. Sale, "General Thoughts on Pascal Arising out of Correspondence Between Southampton and Tasmania", Pascal Newsletter, 6, 45-47 (November 1976)
- [234] A. Sale, "Pascal Stylistics and Reserved Words", Software-- Practice and Experience, 9, 821-825 (1979)
- [235] A. Sale, "Some Observations on Pascal and Personal Style", Pascal News, 17, 68-71 (March 1980)
- [236] V. Santhanam, "A Hardware-Independent Virtual Architecture for Pascal", AFIPS Conference Proceedings, 48, 637-48 (1979)
- [237] J. B. Saxe and A. Hisgen, "Lazy Evaluation of the File Buffer for Interactive I/O", Pascal News, No. 13, (December 1979)
- [238] S. Schach, "Tracing the Heap", Pascal News, 15, 67-68 (September 1979)
- [239] S. R. Schach, "A Portable Trace for the Pascal Heap", Software-- Practice and Experience, 10, 421-426 (1980)
- [240] H. Schauer, "Micropascal-- A Portable Language Processor for Microprogramming Education", Euromicro J. (Netherlands), 5, 2, 89-92 (1979)
- [241] R. Schild, "Implementation of the Programming Language Pascal", Lecture Notes in Economics and Mathematical Systems, 75, (1972)
- [242] J. W. Schmidt, "Some High Level Language Constructs for Data of Type Relation", ACM Transactions on Database Systems, 2, 3, 247-261 (1977)
- [243] F. B. Schneider and A. J. Bernstein, "Scheduling in Concurrent Pascal", Operating Systems Review, 12, 2, 15-20 (1978)
- [244] G. M. Schneider, "The Need for Heirarchy and Structure in Language Management", Pascal Newsletter, 6, 34-34 (November 1976)
- [245] G. M. Schneider, "Pascal: An Overview", IEEE Computer, 12, 4, 61-65 (1979)
- [246] G. M. Schneider, S. W. Weingart and D. M. Perlman, An Introduction to Programming and Problem Solving With Pascal, Wiley, New York (1978)
- [247] M. J. R. Shave, "The Programming of Structural Relationships in Dynamic Environments", Software-- Practice and Experience, 8, 199-211 (1978)
- [248] R. Shaw (ed.), Pascal News, Digital Equipment Corp., Atlanta, Georgia: No. 17 (March 1980), No. 18 (May 1980) (See also A. Mickel and G. Richmond)
- [249] K. A. Shillington and G. M. Ackland (ed.s), UCSD Pascal Version 1.5, Institute for Information Systems, University of California, San Diego (1978)
- [250] M. Shimasaki, S. Fukaya, K. Ikeda, and T. Kiyono, "An Analysis of Pascal Programs in Compiler Writing",

- Software-- Practice and Experience, 10, 149-157 (1980)
- [251] S. K. Shrivastava, "Sequential Pascal With Recovery Blocks", Software-- Practice and Experience, 8, 177-185 (1978)
- [252] S. K. Shrivastava, "Concurrent Pascal with Backward Error Recovery: Language Features and Examples", Software-- Practice and Experience, 9, 1001-1020 (1979)
- [253] S. K. Shrivastava, "Concurrent Pascal with Backward Error Recovery: Implementation", Software-- Practice and Experience, 9, 1021-1033 (1979)
- [254] A. Silberschatz, "On the Safety of the I/O Primitive in Concurrent Pascal", Computer Journal, 22, 142-45 (May 1979)
- [255] A. Silberschatz, R. B. Kieburtz and A. J. Bernstein, "Extending Concurrent Pascal to Allow Dynamic Resource Management", IEEE Transactions on Software Engineering, SE-3, No. 3 (May 1977)
- [256] A. Singer, J. Hueras and H. Ledgard, "A Basis for Executing Pascal Programmers", SIGPLAN Notices, 12, 7, 101-105 (1977)
- [257] R. L. Sites, "Programming Tools: Statement Counts and Procedure Timings", SIGPLAN Notices, 13, 12, 98-101 (1978)
- [258] F. L. Sites, "Moving a Large Pascal Program from an LSI-11 to a Cray-1", Pascal News, 13, 59-60 (December 1978)
- [259] R. L. Sites and D. R. Perkins, Universal P-code Definition, Version (Q-2), California University, San Diego (January 1979)
- [260] N. Solntseff, "McMaster Modifications to the Pascal 6000 3.4 System", Computer Science Technical Note 74-CS-2, McMaster University, Ontario, Canada (November 1974)
- [261] N. Solntseff and D. Wood, "Pyramids: A Data Type for Matrix Representation in Pascal", BIT, 17, 3, 344-350 (1977)
- [262] A. Springer, "A Comparison of Language C and Pascal", IBM Technical Report No. G320-2128, IBM Cambridge Scientific Center, Cambridge, Massachusetts (August 1979)
- [263] J. Steensgaard-Madsen, "More on Dynamic Arrays in Pascal", SIGPLAN Notices, 11, 5, 63-64 (1976)
- [264] J. Steensgaard-Madsen, "Pascal-- Clarifications and Recommended Extensions", ACTA Informatica, 12, 73-94 (1979)
- [265] N. Suzuki and K. Ishihata, "Implementation of an Array Bound Checker", Internal Report of the Department of Computer Science, Carnegie-Mellon University (1976)
- [266] M. Takeichi, Pascal Compiler for the FACOM 230 OS2/VS, University of Tokyo (1975)
- [267] A. S. Tanenbaum, Pascal-U Manual, Vrije University, Amsterdam (1977)
- [268] A. S. Tanenbaum, "A Comparison of Pascal and Algol 68", The Computer Journal, 21, 4, 316-323 (1978)
- [269] R. D. Tennent, "Another Look at Type Compatibility in Pascal", Software-- Practice and Experience, 8, 429-437 (1978)
- [270] R. D. Tennent, "A Denotational definition of the Programming Language Pascal", Technical Report 77-47, Computing and Information Science, Queen's University, Canada (1977)
- [271] R. D. Tennent, "Language Design Methods Based on Semantic Principles", ACTA Informatica, 8, 2, 97-112 (1977)
- [272] F. D. Tennent, "A Note on Files in Pascal", BIT, 17, 3, 362-366 (1977)
- [273] D. Thibault and P. Mancel, "Implementation of a Pascal Compiler for the CII Iris 80 Computer", SIGPLAN Notices, 8, 6, 89-90 (1973)
- [274] R. D. Vavra, "What Are Pascal's Design Goals?", Pascal News, 12, 34-35 (June 1978)
- [275] T. Venema and J. des Rivieres, "Euclid and Pascal", SIGPLAN Notices, 13, 3, 57-69 (1978)
- [276] W. de Vries, "An Implementation of the Language Pascal for the PDP 11 Series, Based on a Portable Pascal Compiler", Technische Hogeschool Twente, Enschede (March 1975)
- [277] S. P. Wagstaff, "Disposing of Dispose", Pascal News, 9 & 10, 40-41 (September 1977)

- [278] B. Wallace, "More on Interactive Input in Pascal", SIGPLAN Notices, 14, 9, p.76 (1979)
- [279] A. I. Wasserman, "Testing and Verification Aspects of Pascal-like Languages", Computer Languages, 4, 155-169 (1979)
- [280] D. A. Watt, "An Extended Attribute Grammar for Pascal", SIGPLAN Notices, 14, 2, 60-74 (1979)
- [281] C. A. G. Webster, Introduction to Pascal, Heyden, London (1976)
- [282] J. Welsh, "Economic Range Checks in Pascal", Software-- Practice and Experience, 8, 85-97 (1978)
- [283] J. Welsh and D. W. Bustard, "Pascal-Plus-- Another Language for Modular Multiprogramming", Software-- Practice and Experience, 9, 947-957 (1979)
- [284] J. Welsh and J. Elder, Introduction to Pascal, Prentice-Hall International, London (1979)
- [285] J. Welsh and R. M. McKeag, Structured System Programming, Prentice-Hall, Englewood Cliffs, New Jersey (1980)
- [286] J. Welsh and C. Quinn, "A Pascal Compiler for the ICL 1900 Series Computers", Software-- Practice and Experience, 2, 73-77 (1972)
- [287] J. Welsh, W. J. Sneeringer and C. A. R. Hoare, "Ambiguities and Insecurities in Pascal", Software-- Practice and Experience, 7, 685-696 (1977)
- [288] B. A. Wichmann and A. H. J. Sale, "A Pascal Processor Validation Suite", Pascal News, 16, 12-24 (October 1979)
- [289] K. Wickman, "Pascal is a Natural", IEEE Spectrum, (March 1979)
- [290] R. Wilsker, "On the Article 'What to do After a While'", Pascal News, 13, 61-62 (December 1978)
- [291] I. R. Wilson and A. M. Addyman, A Practical Introduction to Pascal, Springer-Verlag, New York (1979)
- [292] N. Wirth, "The Design of a Pascal Compiler", Software-- Practice and Experience, 1, 309-333 (1971)
- [293] N. Wirth, "The Programming Language Pascal and its Design Criteria", High Level Languages, Infotech State

of the Art Report 7 (1972)

- [294] N. Wirth, Pascal-S: A Subset and its Implementation, Berichte Nr. 12, Institut für Informatik, Eidgenössische Technische Hochschule, Zurich, Switzerland, 1975
- [295] N. Wirth, "The Programming Language Pascal", ACTA Informatica, 1, 35-63 (1971)
- [296] N. Wirth, "The Programming Language Pascal (Revised Report)", Berichte der Fachgruppe Computer-Wissenschaften, 5, Zurich, 49 (November 1972)
- [297] N. Wirth, "Comment on a Note on Dynamic Arrays in Pascal", SIGPLAN Notices, 11, 1, 37-38 (1976)
- [298] N. Wirth, On "Pascal", Code Generation, and the CDC 6000 Computer, STAN-CS-72-257, Computer Science Department, Stanford University, Stanford, 28 (1972)
- [299] N. Wirth, "An Assessment of the Programming Language Pascal", SIGPLAN Notices, 10, 23-30 (1975)
- [300] N. Wirth, Algorithms + Data Structures = Programs, Prentice Hall (1976)
- [301] N. Wirth, Systematic Programming: An Introduction, Prentice Hall, Englewood Cliffs, New Jersey (1973)
- [302] H. Wupper, "Some Remarks on 'A Case for Acquiring Pascal'", Software-- Practice and Experience, 10, 247-48 (1980)
- [303] M. Yasumura, "Evolution of Loop Statements", SIGPLAN Notices, 12, 9, 124-129 (1977)

REVIEW: PASCAL With Style: Programms Proverbs

"PASCAL With Style: Programms Proverbs" (Hayden Book Company, Rochelle Park, New Jersey, USA, 1979) is an addition to "BASIC, COBOL, FORTRAN] With Style: Programms Proverbs" by Henry Ledgard (with various others). "PASCAL" is co-authored by Paul Nasin, and John Heuras. All three authors are at the University of Massachusetts. This volume, like its predecessors, is "intended for ... programmers who want to write carefully constructed, readable programs". I feel compelled to point out that "PASCAL" is used throughout this book in place of the traditional, and correct, "Pascal", and that this error is symptomatic of my main criticism of "PASCAL With Style" (PWS for short).

What Ledgard, et al, have done is to slightly rework the previous books (I believe "BASIC..." was first). The Proverbs are pithy, sometimes witty, "rules" for programmers. The present book shares the Proverbs with the others in the series. This is all to the good. But Pascal has been treated here as though it were like [BASIC, FORTRAN, COBOL]. And this is where Ledgard, et al, have not done so well. They have failed to address the characteristics of Pascal which make it different from other languages. Thus, they treat Pascal's name as though it were an acronym, because "FORTRAN" and "BASIC" and "COBOL" are acronyms. This approach is also reflected in some surprising assertions. On page 35 they state that one should make sure all constant data items are declared as such. Fine. In the next sentence, though, they say that no executable statement should "modify" (redefine?) the value of a constant. In Pascal, of course, constants simply can not be "modified". On page 82, and elsewhere, identifiers such as "GAME_MOVE" are used. Perhaps this would be legal in PL/I, but not in Pascal.

Experienced Pascal programmers reading PWS would spot most of these quirks, make a mental note, and move along. The novice, though, could conceivably be misled, and that would be most annoying.

PWS is a letdown, not so much because of the (trivial) errors of commission, but because of the gaps left unfilled. Recursion, for example, is dismissed with 10 short paragraphs. There is a reference to "a good deal of the literature" being devoted to recursion (p.138), but no specific references are given. But at least recursion is mentioned; pointer types (and their proper use) are totally ignored. Structured types treated include only arrays. Perhaps I misinterpret the authors' intentions, but it does seem that in Pascal, especially, data representation is an important part of making programs comprehensible to the human mind. And making programs comprehensible (and correct) is what programming style is all about. Sets, subranges, and record types are simply not treated.

There are a few nissing syntax errors. On page 118, for example, a "(" is omitted in a procedure declaration. This is curious, and I mention it only because parts of the book appear to have been printed by a Dictewriter, implying the text was machine-readable. Why not all of it?

That way, they could have done some editing and had a compiler look at the examples - a good way to eliminate errors. (In fact, Kernighan and Plausser used this technique in "Software Tools" (McGraw-Hill), wherein RATFOR was presented.)

Despite the above, PWS is not a useless book. I found the section treating top-down techniques to be useful. PWS describes other approaches to problem definition/solution and explains why they fail so often. The authors lay out in detail the process of successive refinement. This is clear and to the point. The bibliography contains the standard references to Wirth, Dijkstra, etc., as well as several less well known sources. The Programms Proverbs are worth reading and knowing. They are presented with explanations of why they are important, and examples are given. Ledgard's pretty-printing program is presented in an appendix. This is written in fine style, as it should be. Sadly, no information is given on the possibility of acquiring a machine-readable version of the program. A list of style rules is developed by the authors. Many people writing Pascal could benefit from reading and following them. Others might make use of them as a starting point in developing their own style rules.

Finally, there are a lot of people who do not even think about style, or who think it is not important, or worst of all, who think they employ it but don't. PWS is concise, easy-to-read, and treats style in regard to algorithmic issues with reasonable success. For the programmer who has learned the syntax of Pascal, but who has not learned to express algorithms clearly, or how to approach problems in an organized, methodical fashion PWS could be a revelation. So even if you use good style (are you sure you do? how do you know?), you might want to spend \$6.95 for PWS to lend to your colleagues - after all, you might have to read their code someday.

Christopher Awley
80/02/09

University of Minnesota
Agricultural Extension Service
415 Coffey Hall
St. Paul, Minnesota 55108 USA

Backissues of Pascal News(letter) from Time Zero - Andy Mickel 80/07/11.

Pascal Newsletter was started by George Richmond at the University of Colorado Computing Center in early 1974 primarily to spread information about the distribution of the CDC Pascal compiler and the Pascal-P compiler and to answer questions about other issues. He edited issues 1 through 4. In 1976 Pascal User's Group assumed control of Pascal Newsletter. I changed the name to Pascal News with issue 9. Below are some facts about issues 1 through 16.

| Date | Issue | pages (numbered) | Estimated printed copies |
|----------|-----------------------------|------------------|------------------------------|
| Jan 1974 | Pascal Newsletter #1 | 8 (8) | 200+SIGPLAN Notices 1974 Mar |
| May 1974 | Pascal Newsletter #2 | 18 (18) | 250+SIGPLAN Notices 1974 Nov |
| Feb 1975 | Pascal Newsletter #3 | 19 (19) | 400+SIGPLAN Notices 1976 Feb |
| Aug 1976 | Pascal Newsletter #4 | 103 (103) | 500+230 sent by PUG |
| Sep 1976 | Pascal Newsletter #5 | 124 (65) | 1150+350 UK |
| Nov 1976 | Pascal Newsletter #6 | 180 (91) | 1150+350 UK |
| Feb 1977 | Pascal Newsletter #7 | 90 (45) | 1150+350 UK |
| May 1977 | Pascal Newsletter #8 | 128 (65) | 1150+450 UK |
| Sep 1977 | Pascal News #9/10(combined) | 220 (113) | 3500+600 UK+150 AUS |
| Feb 1978 | Pascal News #11 | 202 (105) | 3500+600 UK+150 AUS |
| Jun 1978 | Pascal News #12 | 135 (69) | 3500+600 UK+150 AUS |
| Dec 1978 | Pascal News #13 | 239 (123) | 4000+750 UK+250 AUS |
| Jan 1979 | Pascal News #14 | 61 (61) | 4100+750 UK+250 AUS |
| Sep 1979 | Pascal News #15 | 247 (125) | 4000+750 UK+250 AUS |
| Oct 1979 | Pascal News #16 | 305 (155) | 4000+750 UK+250 AUS |

At PUG(USA) there are approximately 700 copies of 9-12 and 1100 copies of 13-16 left.

#9/10, page 11 describes the contents of Pascal Newsletters 1-8.
#11, pages 16-19 completely describe Pascal Newsletters 5-8.
#13, pages 16-18 completely describe Pascal News 9-12.

If you want indexed information about Pascal compilers, the story behind the Pascal Standards activity, the complete set of listings of software tools, and a complete roster of the PUG membership 1976-1979, there is no substitute for obtaining all the available backissues: 9-16.

Review of Pascal News 13, 14, 15, and 16. - Andy Mickel 80/07/11.

I would like to urge all new PUG members to consider obtaining backissues 13-16 so that you will be better oriented to events in our recent past.

To describe the highlights: #13 and #15 are the meaty issues. #13 contains the most recent, complete summary of all Pascal compilers to present. The articles in #13 are mostly centered on a lively discussion of control structures. #15 describes a lot of standards activity and the resolution of the future of Pascal News and PUG.

#14 is completely devoted to Working Draft 3 of the Pascal Standard, and #16 is completely devoted to a Validation Suite of more than 300 Pascal programs.

Pascal News #13, December, 1978, Pascal User's Group, University of Minnesota Computer Center, 239 pages (123 numbered pages), edited by Andy Mickel.

Editor's Contribution: Thanks to those people at the University of Minnesota who have given Pascal News the shadow of their smile, FORTRAN - The End at Last? Recent events: Employment opportunity, Concurrent Pascal, NASA and the Galileo Project, Conventionalized Extensions, Standards, Pascal Machines, Pascal Usage, Explosion

in Industry Literature. Pascal User's Group / Pascal News status: why we are behind.

Here and There; News from Pascalers; a very large Pascal in the News; another Pascal T-shirt; Pascal in Teaching; Books and Articles; Conference reports: French AFCET Pascal Group, Australian Computer Science Conference, SIGPLAN ACM meeting, UCSD Pascal Workshop. A Review of Pascal News 9/10, 11, and 12. Roster Increment 78/04/22 - 10/31.

Applications: A review of Software Tools by Rich Cichelli; Algorithm A-1 comments, A-3 Determine Real Number Environment. Software Tool S-3 Prettyprint; S-4 Format.

Articles:

"Moving a Large Pascal Program from an LSI-11 to a Cray-1"

- Richard L. Sites

[A 2400-line Pascal program was moved between 2 machines whose CPU speed ratio is 150 to 1. The task proved easy and 6 portability problems are outlined. Lack of adherence to standards and incompatibilities in the run-time environment were the major areas of difficulty.]

"On the Article 'What to do After a While'"

-Roy A. Wilsker

[An examination of a table search algorithm is made with respect to considerations of "psychological set," "proving programs correct," "the spirit of Pascal," and "efficiency." Conditional evaluation of Boolean expressions as advocated in the original paper is not necessarily the solution.]

"A Resolution of the Boolean Expression-Evaluation Question or If Not Partial Evaluation Then Conditional Expressions"

- Morris W. Roberts and Robert N. Macdonald

[The language features of case expression, value block and the conditional expression are recommended as additions to Pascal taken from the precedents of ALGOL-60 and ALGOL-W. An analysis of several control structure constructs is given.]

"What to do After a While .. Longer"

- T.M.N. Irish

[A thorough reply to Mullins and Barron's article "What to do After a While"

arguing against conditional Boolean expression evaluation. He says we should not 1) write programs that rely on ill-defined factors, side-effects of functions, or undefined values, 2) depend on implementors to let us get away with them, 3) tell implementors to let us get away with them, or 4) complain if implementors use any means they can devise to prevent us getting away with them.]

"Know the State You Are In"

- Laurence V. Atkinson

[A number of recent articles have highlighted problems with multiple exit loops in Pascal. Many of these problems disappear when a loop is controlled by a user-defined scalar. The state transition technique is applicable to a number of programming situations and to multi-exit loops in particular.]

Open Forum:

78/05/25 Sam Calvin to Andy Mickel: [Department of Defense Dependents schools use of Pascal in Math programs to teach K-12 students with personal instruction]

78/06/08 Dave Rasmussen to Andy Mickel: [Building Automation Systems process control language using Pascal, at Johnson Controls in Milwaukee]

78/04/24 C. Edward Reid to Andy Mickel: [corrections to letter of 78/03/16 in PN #12 p47]

78/12/01 Andy Mickel to PUG members: [The future of PUG and Pascal News; turning the editorship over to someone else. A proposed constitution]

78/07/17 Charles L. Hethcoat III to Andy Mickel: [The reference to "Implications of Structured Programming for Machine Architecture" by Andrew Tanenbaum in CACM describing EM-1 a compact instruction machine.]

78/07/28 C. Edward Reid to Andy Mickel: [Pointing attention to Dijkstra's article "DOD-1: The Summing Up" in SIGPLAN Notices and highlighting shortcomings]

78/07/29 Ralph D. Jeffords to Andy Mickel: [Announcing the construction of 2 software tools in Pascal: LEXGEN and LALRI for Syntax Parsing and Generating.]

- 78/08/23 Jim Merritt to Andy Mickel: [The impact and future of Pascal implementations on personal computer systems. Very optimistic.]
- 78/08/29 Chuck Beauregard to Andy Mickel: [Pascal jobs on the West Coast]
- 78/09/08 Eiti Wada to Arthur Sale: [Experience with teaching Pascal at the University of Tokyo]
- 78/09/23 Rod Montgomery to Andy Mickel: [News in New Jersey about recent microcomputer Pascal events and the blossoming interest in UCSD Pascal]
- 78/07/10 Kenneth Wadland to Andy Mickel: [News about teaching Pascal at Fitchburg State College and support for Charles Fischer's method of standardization]
- 78/10/18 William C. Moore to Andy Mickel: [Need for a Pascal book with complete compiler specifics.]
- 78/10/10 D. J. Maine to Andy Mickel: [Pascal developments at Computer Automation--compilers and jobs]
- 78/09/25 H.H.Nagel to Andy Mickel: [General reactions to PUG's work; the DECSystem 10 implementation and incorporation of otherwise]
- 78/? Karl Fryxell to Andy Mickel: [Reaction to Judy Bishop's discussion of subranges and conditional loops]
- 78/08/16 Richard Hendrickson to Andy Mickel: [Problems with performance of CRAY Pascal compared to CRAY Fortran and problems with Pascal in general.]
- 78/09/04 Laurence Atkinson to Andy Mickel: [Comments on programming logic--use of Booleans instead of two-state scalars; negative logic]
- 78/09/27 Judy Bishop to T.M.N.Irish: [Clarification of points of agreement and disagreement about "What to do after a While."]

Pascal Standards:

- Report by Andy Mickel on: corrections to EBNF by Niklaus Wirth; Distribution plans for the Validation Suite; Working Draft/3 will appear as Pascal News #14; News from the International Working Group on Pascal Extensions.
- 78/01/30 Niklaus Wirth to Andy Mickel: [Suggesting the formation of a small group of implementors to implement agreed-upon extensions]
- 78/07 Arthur Sale: Consensus Position on Case defaults--adding an otherwise clause.
- 78/06/12 Brian Wichmann to Andy Mickel: [Announcement of a Pascal Test Suite which is under development.]
- 78/09/15 Tony Addyman: Progress Report on the Standard Number 1. Plans for producing a draft for public comment by the BSI and submission to ISO.
- 78/09/12 Rick Shaw to Andy Mickel: [Will act as USA Standards liaison to Tony Addyman; will draw up program interchange guidelines and gather test programs.]
- 78/09/27 Andy Mickel to William Hanrahan: [Urge that Pascal standardization be left to the BSI and not undertaken separately by ANSI.]
- 78/10/23 News Release by CBEMA on behalf of ANSI of the formation of ANSI committee X3J9 for Pascal standardization.
- 78/11/10 News Release by CBEMA on behalf of ANSI regarding first X3J9 meeting.

Implementation Notes:

General Information, Implementors Group Report, Checklist, Portable Pascals: Pascal-P, Pascal P4--Bug Reports, Pascal Trunk, Pascal J; Pascal Variants: Pascal-S, Concurrent Pascal; Modula; Feature Implementation Notes: INPUT and OUTPUT, Improved Checking of Comments, Lazy I/O; Machine-Dependent Implementations: Altos ACS-8000, ~~Amdahl~~ 470, BESM-6, BTI 8000, Burroughs 5700, 6700, 7700, CDC 6000, Cyber 70, ~~170~~, 7600, Cyber 76, Cyber 203, Data General Nova, Eclipse, DEC PDP-8, PDP-11, VAX 11/780, DECsystem 10,20, Heathkit H-11, Hewlett Packard 21MX, 2100, Honeywell H316, IBM 360/370, Series 1, ICL 1900, 2900, Intel 8080, Interdata 7/32, 8/32, Marinchip M9900, MOSTEK 6502, Motorola 68000, North Star Horizon, Northwest Micro 85/P, Prime P-300, Processor Technology SOL, Radio Shack TRS-80, SEL 8600, Siemens 4004,7000, Telefunken TR-440, TI-ASC, 980,990,9900, Univac 90/70, 1100, Western Digital Microengine, Zilog Z-80,Z-8000; Index.

Pascal News # 14, January, 1979, Pascal User's Group, University of Minnesota Computer Center, 61 pages (61 numbered pages), edited by Andy Mickel.

Editor's Contribution: A special issue devoted to the Draft Pascal Standard. Notes that Pascal the language and its development have been unique. The appropriateness of letting Europeans standardize a language with European origins.

The BSI / ISO Working Draft of Standard Pascal by the BSI DPS/13/4 Working Group. Letter, Covering Note and Commentary by Tony Addyman; The Draft (6 sections + index); Related Documents: A history, members of DPS/13/4 and the ISO proposal.

Pascal News #15, September, 1979, Pascal User's Group, University of Minnesota Computer Center, 247 pages (125 numbered pages), edited by Andy Mickel.

Editor's Contribution: Why Pascal News #15 is so late and thanks for not giving up hope. The future of PUG and Pascal News. Voting on the proposed constitution. Rick Shaw as new editor. Jottings on the standard, Validation Suite, Distribution problems, and Pascal on Micros.

Here and There: Tidbits (news from Pascalers), a very large Pascal in the News, Ada, Books and Articles including a Textbook survey, Conferences and Seminars (4 Industry Seminars to be given on Pascal), Announcements for ACM 79 and IFIP 80 2 reports on the DECUS Pascal SIG ; Pascal session at ACM 78. PUG Finances 77-78; Roster Increment to 79/05/14.

Applications: News: Business Packages available, Data Base Management Systems, Interpreters Inter-language translators, Bits and Pieces. Software Tools: changes to S-1 Compare, S-2 Augment and Analyze on the Dec 10, S-3 Prettyprint clarifications, S-4 Format confessions, S-5 ID2ID documentation + program, S-6 Prose documentation + program. Programs: P-1 PRINTME. Algorithms: A-3 Perfect Hashing Function.

Articles:

"A Contribution to Minimal Subranges"

- Laurence V. Atkinson

[Enumerated and subrange types are two of the most important features of Pascal. Their contribution to transparency, security and efficiency is often not fully appreciated. Their under-utilization is one of the (many!) features I repeatedly criticize when reviewing Pascal books. Minimal subranging is desirable in Pascal. One benefit of a state transition approach to dynamic processes, is that minimal subranging can be achieved.]

"A Note on Scope, One-Pass Compilers, and Pascal"

- Arthur Sale

[The scope rules set out in section 2 and now incorporated into the draft Pascal Standard are sufficient to permit even one-pass compilers to reject incorrect programs. The suggested algorithm adds an overhead at every defining occurrence, but since uses exceed definitions in general it may not be too expensive in time to implement. In any case, what price can be put on correctness?]

"Pascal-I - Interactive, Conversational Pascal-S"

- Richard Cichelli

[Pascal-I is a version of the Wirth Pascal-S system designed to interact with the terminal user. The system contains a compiler, interpreter, text editor, formatter, and a run-time debugging system. A description of commands and a terminal session are given.]

"Tracing the Heap"

- Steve Schach

[The package HEAPTRACE outlined in this paper aids the user to debug his programs by providing information as to the contents of the records on the heap. Each field is named, and its value is given in what might be termed "high-level format".]

"Why Use Structured Formatting"

- John Crider

["Structured Formatting" is a technique for prettyprinting Pascal programs. It is based on a single indented display pattern which is used to display almost all of the structured statements in a Pascal program.]

Open Forum:

- 79/01/30 David Barron to Andy Mickel: [Thoughts on the future of PUG prompted by Open Letter in #13. PUG has succeeded beyond all reasonable expectation because it has been informal and unconventional.]
- 79/03/12 Paul Brainerd to Andy Mickel: [Understands the time to produce Pascal News and we should pick a new editor carefully and perhaps be realistic about price.]
- 79/03/19 John Earl Crider to Andy Mickel: [Pascal News has become an impressive journal that ... I am sure serves most other PUG members as their major link to Pascal developments.]
- 79/03/19 John Eisenberg to Andy Mickel: [The Bald Organization--An Anti-Constitution For Pascal User's Group]
- 79/05/01 Jim Miner to Friends of PUG: [Save the PUG! What is PUG? On the Proposed Constitution. Where Now, PUG?]
- 79/05/12 Rich Stevens to Jim Miner: [I agree with Save the PUG. Would rather see a smaller, more frequent publication.]
- 79/05/18 Arthur Sale to Jim Miner: [I agree with Save the PUG. Constitution would effectively eliminate international cooperation by ignoring it.]
- 79/05/20 David Barron to PUG membership: [I agree with Save the PUG. The only real function of PUG is to publish Pascal News.]
- 79/05/11 Gregg Marshall to Andy Mickel: [I oppose any movements which advocate dissolution, or radical change from the current editorial policies.]
- 79/05/30 Bill Heidebrecht to Andy Mickel: [PUG must be kept alive, independent, and international--it has not outlived its usefulness.]
- 78/09/30 Tom King to Andy Mickel: [Use of Pascal on an AM-100 system in Winnemucca, Nevada with varied applications]
- 78/11/02 John Eisenberg to Andy Mickel: [Arguments over the use of Pascal and Pascal Standards and extensions.]
- 78/10/16 Robert Cailliau to Andy Mickel: [Comments on Pascal News #12 standards and extensions.]
- 78/10/22 C. Roads to Andy Mickel: [Pascal in Music applications in the Computer Music journal.]
- 78/11/07 Laurent O. Gelinier to Andy Mickel: [Applications on a large file processor and intelligent terminals network]
- 78/11/08 Eugene Miya to Andy Mickel: [Jet Propulsion Labs and Pascal on their 300 computers: the Deep Space Network and need for validation programs.]
- 78/11/27 Paul Lebreton to Andy Mickel: [News on the Motorola 68000 and Pascal and Bus standards and other hardware conventions.]
- 78/11/21 Sergei Pokrovsky to Andy Mickel: [Use of a double-variant node in Pascal used to create a syntax for graph structures.]
- 79/03/26 Bill Marshall to Andy Mickel: [Deviations in 4 compilers for TRUNC and ROUND]
- 79/02/09 Curt Hill to Andy Mickel: [Pascal at the University of Nebraska: good report on the Stanford 360/370 compiler.]
- 79/03/08 James Cameron to Andy Mickel: [The problems of extensions might be solved by also providing a superset language "PascalII"]
- 79/03/13 Roger Gulbranson to Andy Mickel: [Reply to Richard Cichelli's claim that complex numbers are easy to create in Pascal. Probably need an Operator declaration]
- 79/04/30 B. J. Smith to Andy Mickel: [The production of various Software Tools in Pascal by Interactive Technology INC. including a DBMS and business applications.]
- 79/07/20 Peter Humble to Andy Mickel: [Need for conformant arrays in Pascal for numerical applications]
- 79/06/05 George Richmond to Andy Mickel: [Pascal at Storage Technology Corp. Errors in the Pascal-P compiler.]
- 79/06/07 Bob Schor to PUG: [Pascal at Rockefeller University and on PDP-11's]

- 79/06/29 Jack Dodds to Tony Addyman: [The need for conformant arrays in Pascal for the use of libraries and a better definition of EXTERNAL]
- 79/09/20 Andy Mickel to Ken Bowles: [Pascal-P is public-domain software and UCSD Pascal is based on Pascal-P, yet Improper modification history and credit is made.]

Pascal Standards.

Progress Report by Jim Miner, with help from Tony Addyman, Andy Mickel, Bill Price and Arthur Sale. Progress of the BSI/ISO standard. Standards activity in the United States. Other National Standards Efforts. ANSI charter documents for 2 committees.

Report of the ANSI X3J9 meeting in Washington by Richard Cichelli. Lots of politics.

Statement by Niklaus Wirth supporting the ISO Standards activity by Tony Addyman.

79/03/19 News Release by CBEMA on behalf of ANSI regarding the solicitation of public comments on the ISO draft standard for Pascal.

79/08/31 Experiences at the Boulder, Colorado meeting of IEEE/X3J9 committee by Andy Mickel. More politics.--

Validation Suite.

Announcement by Arthur Sale of the distribution centers and prices for the forthcoming Pascal Validation Suite.

Implementation Notes:

Portable Pascals: Pascal-P, Pascal-E. Pascal Variants: Tiny Pascal, Pascal-S, Pascal-I, Concurrent Pascal, MODULA, Pascal-Plus. Hardware Notes: Pascal Machines. Feature Implementation Notes: Comment on Lazy I/O; Wish list to implementors; Note to all implementors; The for statement. Checklist. Machine-Dependent Implementations: Apple II, BESM-6, Burroughs B5700, CDC 6000/Cyber 70,170 Data General Eclipse, DEC PDP-11, LSI-11, Digico Micro 16E, Facom 230-45S, GEC 4082, Honeywell Level6, Level 66, IBM Series 1, IBM 360/370, ICL 1900, Intel 8080,8085, 8086, MODCOMP II/IV, Norsk Data NORD-10, Perkin Elmer 7/16, 3220, RCA 1802, SWTP 6800, Sperry V77, TRS-80, TI-9900, Zilog A-80.

Pascal News #16, October, 1979, Pascal User's Group, University of Minnesota Computer Center, 305 pages (155 numbered pages), edited by Andy Mickel.

Editor's Contribution: A special issue devoted to the Pascal Validation Suite. Rick Shaw is new editor of Pascal News; Thanks to everyone. How we put together an issue of Pascal News. Final thoughts on the PUG phenomenon. Greetings from the new editor and predictions of the next two issues.

The Pascal Validation Suite. Introduction to the special issue by Arthur Sale. Aims and Methods of the Validation Suite. Version 2.2 of the Validation Suite. Distribution Information, Distribution tape format and addresses. "A Pascal Processor Validation Suite" by Brian A. Wichmann and Arthur H. J. Sale. Listing of the 300+ test programs. Four Sample Validation Reports: introduction, UC B6700 compiler, Tas B6700 compiler, OMSI PDP-11 compiler, Pascal-P4 compiler. Stamp out bugs T-Shirt.


16 Hewlett Packard 1000
 30 Hewlett Packard 2000/2100
 23 Hewlett Packard 21MX
 80 Hewlett Packard 3000
 1 HEX-29
 4 Hitachi 8000
 1 Honeywell H316
 77 Honeywell Level 6
 63 Honeywell 6000/Level 66/68
 11 IBM Series 1
 5 IBM System 3
 7 IBM System 32/34
 14 IBM 1130
 430 IBM System 360/370
 36 IBM 3030
 2 IBM 4330
 44 ICL 1900
 23 ICL 2900
 2 ILLIAC IV
 1 IMSAI VDP 40
 6 IMSAI VDP 80
 31 IMSAI 8080/8085
 118 Intel 8080 (+73)
 16 Intel 8085 (+5)
 18 Intel 8086
 16 Intel (National) AS 456
 2 Ithaca Audio
 1 ITT 1652
 1 ITT 2020
 1 Jacquail J-100
 8 KIM-1
 1 LEC-16
 2 Lockheed Sue
 3 Manchester MU-5
 1 Marinchip 9900
 1 MDS-800
 1 MEMBRAIN
 2 Microdata 32/5
 1 Microdata 1630
 2 MITS Altair 680
 17 MITS Altair 8800
 1 MITS Altair Z-80
 2 Mitsubishi MELCOM 7700
 4 3M Linolex
 15 MODCOMP II
 9 MODCOMP IV
 14 Mostek 6502 (+44)
 67 Motorola 6800 (+10)
 10 Motorola 6809
 8 Motorola 68000
 4 Nanodata QM-1
 2 National Semiconductor S-400
 4 National Semiconductor 2900
 4 National Semiconductor PACE
 16 NCR Century
 10 NCR 8000
 1 NEAC-900
 1 NEAC-3200
 14 Norsk Data NORD-10
 19 North Star Horizon (Z-80)
 5 Northwest Micro 85/P

1 Odell System 85
 11 Ohio Scientific Challenger
 2 Ontel OP-1
 1 PDS-4
 1 Pertec PCC XL40
 8 Pertec PCC 2000
 45 Perkin Elmer Interdata 7/16
 30 Perkin Elmer Interdata 7/32
 1 Perkin Elmer Interdata 8/16
 28 Perkin Elmer Interdata 8/32
 7 Perkin Elmer 3200
 4 Polymorphics 88
 11 Prime P-300
 34 Prime P-400
 4 Prime P-500
 12 Processor Technology SOL-20
 1 Quasar 6800
 1 Quotron 801
 20 Radio Shack TRS-80
 1 RCA 301
 5 RCA 1802
 1 Rockwell 6502
 3 ROLM 1600
 1 RP-16
 2 SBC 80/20
 20 Systems Engineering SEL 32
 3 Systems Engineering SEL 8600
 1 SEMS SOLAR
 1 SEMS T1600
 5 Siemens 4000
 8 Siemens 7000
 1 Singer GP-4B
 1 Singer Librascope
 2 Singer System 10
 1 SORD M-222
 2 SPC-16
 1 Sperry SDP-175
 5 SWTP 6800
 2 Sycor (Northern Telecom) 445
 6 Tandem 16
 1 TDL Z-80
 1 TDS-8 (Z-80)
 7 Tektronix 8002
 3 Telefunken 80
 2 Telefunken TR-440
 67 Terak 8510
 3 Three Rivers PERQ
 10 Texas Instruments 980
 53 Texas Instruments 990
 19 Texas Instruments 9900
 5 Texas Instruments ASC
 1 Texas Instruments DX-10
 1 Time Machine TM-600
 1 Univac 418
 32 Univac 90/9000
 156 Univac 1100
 36 Univac V70/77
 3 Univac UYK-7
 3 Vector Graphics MZ

2 Wang WPS-30
 2 Wang WPS-40
 2 Wang 928
 1 Wang 2200
 36 Western Digital Microengine
 12 Xerox (Honeywell) 560
 2 Xerox (Honeywell) Sigma 3
 4 Xerox (Honeywell) Sigma 5
 11 Xerox (Honeywell) Sigma 6
 16 Xerox (Honeywell) Sigma 7
 1 Xerox (Honeywell) Sigma 8
 10 Xerox (Honeywell) Sigma 9
 3 Xitan Z-80
 176 Zilog Z-80 (+78)
 2 Zilog Z-8000
 53 unspecified microprocessors



Applications

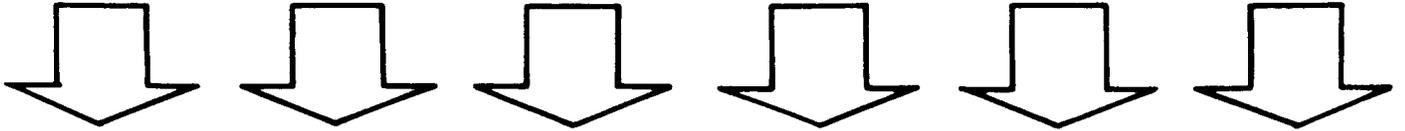

Corrections for Xref program. Pascal News #17

```

*****
1) XREF,PAS;1
464   LinesOnPage := LinesPerPage;   MoveToIndx := 0 (* compress table *);
465   for TblIndx := 0 to HashTblSize - 1 do
*****
2) XREF,PAS;2
464   MoveToIndx := 0 (* compress table *);
465   for TblIndx := 0 to HashTblSize - 1 do
*****
1) XREF,PAS;1
1156  OutputSection := listing;   scan;   OutputSection := idents;
1157  DumpTables;   writeln(tty, '- End CrossRef');   writeln(tty, ' ');
*****
2) XREF,PAS;2
1156  LinesOnPage := LinesPerPage;
1157  OutputSection := listing;   scan;   OutputSection := idents;
1158  LinesOnPage := LinesPerPage;
1159  DumpTables;   writeln(tty, '- End CrossRef');   writeln(tty, ' ');

2 DIFFERENCES FOUND
LP:=DP1:XREF.PAS;1,DP1:XREF.PAS;2

```

All occurrences of ChrCatagory should be changed to ChrCategory.

```

1  program pascals(input, output, tty);
2
3  { Author: N. Wirth, E.T.H. CH-8092 Zurich, 1.3.76 }
4
5  { Pascal-s: compiler and interpreter for a subset of Pascal }
6
7  {
8  * Purpose:
9    This program compiles and interprets Pascal programs which
10   are written in a subset of standard Pascal called Pascal-s.
11
12  * Editors:
13    R. J. Cichelli with corrections and enhancements from D. Baccus.
14
15  * References:
16    Niklaus Wirth, "PASCAL-S: A subset and its implementation",
17    Institut fur Informatik, Eidgenossische
18    Technische Hochschule, Zuerich (1975).
19
20  * Method:
21    Recursive decent compilation into stack code for internal
22    stack machine interpreter.
23
24  * Input:
25    Pascal-s source programs and input data for them.
26
27  * Output:
28    Listing and execution results (post mortum dump on errors.)
29
30  * Limitations:
31    THE LANGUAGE PASCAL-S (by N. Wirth)
32    The choice of features to be included in the subset now
33    called PASCAL-S was mainly guided by the contents of
34    traditional introductory programming courses. Beyond this
35    it is subject to personal experience, judgement, and
36    prejudice. A firm guideline was provided by the demand that
37    the system must process a strict subset of PASCAL, i.e. that
38    every PASCAL-S program must also be acceptable by the
39    compiler of Standard PASCAL without being subjected to the
40    slightest change. This rule makes it possible for students
41    to switch over to the regular system in later courses
42    "without noticing". A language's power and its range of
43    applications largely depend on its data types and associated
44    operators. They also determine the amount of effort
45    required to master a language. PASCAL-S adheres in this
46    respect largely to the tradition of ALGOL 60. Its primitive
47    data types are the integers, the real numbers, and the
48    Boolean truth values. They are augmented in a most
49    important and crucial way by the type char, representing the
50    available set of printable characters. Omitted from PASCAL
51    are the scalar types and subrange types.
52
53
54    PASCAL-S included only two kinds of data structures:
55    the array and the record (without variants). Omitted are
56    the set and the file structure. The exceptions are the two
57    standard textfiles input and output which are declared
58    implicitly (but must be listed in the program heading). A
59    very essential omission is the absence of pointer types and
60    thereby of all dynamic structures. Of course, also all
61    packing options (packed records, packed arrays) are omitted.
62
63    The choice of data types and structures essentially
64    determines the complexity of a processing system. Statement
65    and control structures contribute but little to it. Hence,
66    PASCAL-S includes most of PASCAL's statement structures
67    (compound, conditional, selective, and repetitive
68    statements). The only omissions are the with and the goto
69    statements. The latter was omitted very deliberately
70    because of the principal use of PASCAL-S in teaching the
71    systematic design of well-structured programs. Procedures
72    and functions are included in their full generality. The
73    only exception is that procedures and functions cannot be
74    used as parameters.
75
76  * Computer system:
77    Pascal-s was originally installed on the CDC 6000 systems at
78    E.T.H. The program was modified to compile on DEC PDP 11's
79    using the Swedish Compiler.
80    Scalar types were added using Don Baccus' changes.
81
82  }
83
84  {$W- no warning messages }
85  {$R- no runtime testing }
86
87
88  label
89  99 { abort target };
90
91  const
92  nkwl = 27 { no. of key words };
93  alng = 10 { no. of significant chars in identifiers };
94  llng = 120 { input line length };
95  emax = 38 { max exponent of real numbers };
96  emin = -38 { min exponent };
97  kmax = 15 { max no. of significant digits };
98  tmax = 100 { size of table };
99  bmax = 20 { size of block-table };
100 amax = 30 { size of array-table };
101 c2max = 20 { size of real constant table };
102 csmax = 30 { max no. of cases };
103 cmax = 500 { size of code };
104 lmax = 7 { maximum level };
105 smax = 300 { size of string-table };
106 ermax = 58 { max error no. };
107 omx = 64 { highest order code };
108 xmax = 32767;
109 nmax = 32767;
110 lineleng = 132 { output line length };
111
112 linelimit = 132 { maximum output line size };
113 stacksize = 600 { run-time stack size };
114
115 type
116 symbol =
117 (inton, realcon, charcon, string, notsy, plus, minus, times, idiv,
118 rdiv, imod, andsy, orsy, eql, neq, gtr, geq, lss, leq, lparent,
119 rparent, lbrack, rbrack, comma, semicolon, period, colon, becomes,
120 constsy, typesy, varsy, functionsy, proceduressy, arrays, recordsy,
121 programsy, ident, beginsy, ifsy, casesy, repeatsy, whilesy, forsy,
122 endsy, elsesy, untilsy, ofsy, dosy, tosy, downtosy, thensy);
123 index = - xmax .. + xmax;
124 alfa = packed array [1 .. alng] of char;
125 object =
126 (konstant, variable, type1, prozedure, funktion);
127 types =
128 (notyp, ints, reals, bools, chars, arrays, records, scalars);
129 symset = set of symbol;
130 typset = set of types;
131 item = record
132   typ: types;
133   ref: index
134 end;
135 order = packed record
136   f: - omx .. + omx;
137   x: - lmax .. + lmax;
138   y: - nmax .. + nmax
139 end;
140
141 var
142 sy: symbol { last symbol read by insymbol };
143 id: alfa { identifier from insymbol };
144 inum: integer { integer from insymbol };
145 rnum: real { real number from insymbol };
146 sleng: integer { string length };
147 ch: char { last character read from source program };
148 line: array [1 .. llng] of char;
149 cc: integer { character counter };
150 lc: integer { program location counter };
151 ll: integer { length of current line };
152 errs: set of 0 .. ermax;
153 errpos: integer;
154 progname: alfa;
155 iflag, oflag, skipflag: boolean;
156 constbegsys, typebegsys, blockbegsys, facbegsys, statbegsys: symset;
157 key: array [1 .. nkwl] of alfa;
158 ksy: array [1 .. nkwl] of symbol;
159 sps: array [char] of symbol { special symbols };
160 t, a, b, sx, c1, c2: integer { indices to tables };
161 stantyps: typset;
162 display: array [0 .. lmax] of integer;
163 tab: array [0 .. tmax] of { identifier table }
164   packed record
165     name: alfa;
166     link: index;
167     obj: object;
168     typ: types;
169     ref: index;
170     normal: boolean;
171     lev: 0 .. lmax;
172     adr: integer
173   end;
174 atab: array [1 .. amax] of { array-table }
175   packed record
176     inxtyp, eltyp: types;
177     elref, low, high, elsize, size: index
178   end;
179 btab: array [1 .. bmax] of { block-table }
180   packed record
181     last, lastpar, psize, vsize: index
182   end;
183 stab: packed array [0 .. smax] of char { string table };
184 rconst: array [1 .. c2max] of real;
185 code: array [0 .. cmax] of order;
186
187 procedure abend;
188
189 begin
190   { goto 99 }
191   { } halt
192 end;
193
194 procedure errormsg;
195
196 var
197   k: integer;
198   msg: array [0 .. ermax] of alfa;
199
200 begin
201   msg[0] := 'undef id'; msg[1] := 'multi def';
202   msg[2] := 'identifier'; msg[3] := 'program';
203   msg[4] := ' '; msg[5] := ' ';
204   msg[6] := 'syntax'; msg[7] := 'ident, var';
205   msg[8] := 'of'; msg[9] := ' (';
206   msg[10] := 'id, array'; msg[11] := '[';
207   msg[12] := ']'; msg[13] := ' ..';
208   msg[14] := ' '; msg[15] := 'func. type';
209   msg[16] := ' '; msg[17] := 'boolean';
210   msg[18] := 'convar typ'; msg[19] := 'type';
211   msg[20] := 'prog.param'; msg[21] := 'too big';
212   msg[22] := ' '; msg[23] := 'typ (case)';
213   msg[24] := 'character'; msg[25] := 'const id';
214   msg[26] := 'index type'; msg[27] := 'indexbound';
215   msg[28] := 'no array'; msg[29] := 'type id';
216   msg[30] := 'undef type'; msg[31] := 'no record';
217   msg[32] := 'boole type'; msg[33] := 'arith type';
218   msg[34] := 'integer'; msg[35] := 'types';
219   msg[36] := 'param type'; msg[37] := 'variab id';

```

```

221 msg[38] := 'string'; msg[39] := 'no.of pars';
222 msg[40] := 'type'; msg[41] := 'type';
223 msg[42] := 'real type'; msg[43] := 'integer';
224 msg[44] := 'var, const'; msg[45] := 'var, proc';
225 msg[46] := 'types (:=)'; msg[47] := 'typ (case)';
226 msg[48] := 'type'; msg[49] := 'store ovfl';
227 msg[50] := 'constant'; msg[51] := '=';
228 msg[52] := 'then'; msg[53] := 'until';
229 msg[54] := 'do'; msg[55] := 'to downto';
230 msg[56] := 'begin'; msg[57] := 'end';
msg[58] := 'factor'; k := 0; writeln;
writeln(' key words');
233 while errs <> [] do
234 begin
235 while not (k in errs) do k := k + 1; writeln(k, ' ', msg[k]);
236 errs := errs - [k]
237 end
238 end (errormsg);
239
240
241 procedure endskip;
242
243 begin { underline skipped part of input }
244 while errpos < cc do begin write('-'); errpos := errpos + 1 end;
245 skipflag := false
246 end (endskip);
247
248
249 procedure nextch { read next character; process line end };
250
251
252 function uppercase(ch: char): char;
253
254 begin
255 if (ch >= 'a') and (ch <= 'z')
256 then
257 uppercase := chr(ord(ch) - ord('a') + ord('A'))
258 { ASCII case conversion routine ... EBCDIC requires a
259 more elaborate test }
260 else uppercase := ch
261 end (uppercase);
262
263
264 begin { nextch }
265 if cc = ll
266 then
267 begin
268 if eof(input) then
269 begin
270 writeln; writeln(' program incomplete'); errormsg;
271 abend;
272 end;
273 if errpos <> 0 then
274 begin if skipflag then endskip; writeln; errpos := 0
275 end;
276 write('lc: 5, '); ll := 0; cc := 0;
277 while not eoln(input) do
278 begin ll := ll + 1; read(ch); write(ch); line[ll] := ch
279 end;
280 writeln; ll := ll + 1; read(line[ll])
281 end;
282 cc := cc + 1; ch := uppercase(line[cc]);
283 end (nextch);
284
285
286 procedure error(n: integer);
287
288 begin
289 if errpos = 0 then write(' ****');
290 if cc > errpos then
291 begin
292 write(' ': cc - errpos, '^', n: 2); errpos := cc + 3;
293 errs := errs + [n]
294 end
295 end (error);
296
297
298 procedure fatal(n: integer);
299
300 var
301 msg: array [1..7] of alfa;
302
303 begin
304 writeln; errormsg; msg[1] := 'identifier';
305 msg[2] := 'procedures'; msg[3] := 'reals';
306 msg[4] := 'arrays'; msg[5] := 'levels';
307 msg[6] := 'code'; msg[7] := 'strings';
308 writeln(' compiler table for ', msg[n], ' is too small');
309 abend { terminate compilation }
310 end (fatal);
311
312 { -----insymbol----- }
313
314
315 procedure insymbol { reads next symbol };
316
317 label
318 1, 2, 3;
319
320 var
321 i, j, k, e: integer;
322
323
324 procedure readscale;
325
326 var
327 s, sign: integer;
328
329 begin
330 nextch; sign := 1; s := 0;
331
332 if ch = '+' then nextch
333 else if ch = '-' then begin nextch; sign := -1 end;
334 while ch in ['0'..'9'] do
335 begin s := 10 * s + ord(ch) - ord('0'); nextch end;
336 e := s * sign + e
337 end (readscale);
338
339 procedure adjustscale;
340
341 var
342 s: integer;
343 d, t: real;
344
345 begin
346 if k + e > emax then error(21)
347 else
348 if k + e < emin then rnum := 0.0
349 else
350 begin
351 s := abs(e); t := 1.0; d := 10.0;
352 repeat
353 while not odd(s) do begin s := s div 2; d := sqrt(d) end;
354 s := s - 1; t := d * t
355 until s = 0;
356 if e >= 0 then rnum := rnum * t else rnum := rnum / t
357 end
358 end (adjustscale);
359
360
361 begin { insymbol }
362 1: while ch = ' ' do nextch;
363 if ch in ['A'..'Z']
364 then
365 begin { identifier or wordsymbol }
366 k := 0; id := ' ';
367 repeat
368 if k < alng then begin k := k + 1; id[k] := ch end;
369 nextch
370 until not (ch in ['A'..'Z', '0'..'9']);
371 i := 1; j := nk;
372 { binary search }
373 repeat
374 k := (i + j) div 2; if id <= key[k] then j := k - 1;
375 if id >= key[k] then i := k + 1
376 until i > j;
377 if i - 1 > j then sy := ksy[k] else sy := ident
378 end
379 else
380 if ch in ['0'..'9']
381 then
382 begin { number }
383 k := 0; inum := 0; sy := intcon;
384 repeat
385 inum := inum * 10 + ord(ch) - ord('0'); k := k + 1;
386 nextch
387 until not (ch in ['0'..'9']);
388 if (k > kmax) or (inum > nmax)
389 then begin error(21); inum := 0; k := 0 end;
390 if ch = '.'
391 then
392 begin
393 nextch;
394 if ch = '.' then ch := ':'
395 else
396 begin
397 sy := realcon; rnum := inum; e := 0;
398 while ch in ['0'..'9'] do
399 begin
400 e := e - 1;
401 rnum := 10.0 * rnum + (ord(ch) - ord('0'));
402 nextch
403 end;
404 if ch = 'E' then readscale;
405 if e < 0 then adjustscale
406 end
407 end
408 else
409 if ch = 'E' then
410 begin
411 sy := realcon; rnum := inum; e := 0; readscale;
412 if e < 0 then adjustscale
413 end;
414
415 end
416 else
417 case ch of
418 ':':
419 begin
420 nextch;
421 if ch = '=' then begin sy := becomes; nextch end
422 else sy := colon
423 end;
424 '<':
425 begin
426 nextch;
427 if ch = '=' then begin sy := leq; nextch end
428 else
429 if ch = '>' then begin sy := neq; nextch end
430 else sy := lss
431 end;
432 '>':
433 begin
434 nextch;
435 if ch = '=' then begin sy := geq; nextch end
436 else sy := gtr
437 end;
438 ':.':
439 begin
440 nextch;
441 if ch = '.' then begin sy := colon; nextch end

```



```

881         offset := offset + elsz
882     end
883     end
884 end;
885 if sy <> endsy then
886     begin
887         if sy = semicolon then insymbol
888         else
889             begin
890                 error(14);
891                 if sy = comma then insymbol
892                 end;
893             test([ident, endsy, semicolon], fsys, 6)
894             end
895         end;
896         btab[rf].vsize := offset; sz := offset;
897         btab[rf].psize := 0; insymbol; level := level - 1
898     end;
899     test(fsfs, [], 6)
900 end
901 end { typ };
902
903 procedure parameterlist { formal parameter list };
904
905 var
906     tp: types;
907     rf, sz, x, t0: integer;
908     valpar: boolean;
909
910 begin
911     insymbol; tp := notyp; rf := 0; sz := 0;
912     test([ident, varsy], fsys + [rparent], 7);
913     while sy in [ident, varsy] do
914         begin
915             if sy <> varsy then valpar := true
916             else begin insymbol; valpar := false end;
917             t0 := t; entervariable;
918             while sy = comma do begin insymbol; entervariable; end;
919             if sy = colon
920             then
921                 begin
922                     insymbol;
923                     if sy <> ident then error(2)
924                     else
925                         begin
926                             x := loc(id); insymbol;
927                             if x <> 0 then
928                                 with tab[x] do
929                                     if obj <> type1 then error(29)
930                                     else
931                                         begin
932                                             tp := typ; rf := ref;
933                                             if valpar then sz := adr else sz := 1
934                                         end;
935                                         end;
936                                     test([semicolon, rparent], [comma, ident] + fsys, 14)
937                                 end
938                             else error(5);
939                             while t0 < t do
940                                 begin
941                                     t0 := t0 + 1;
942                                     with tab[t0] do
943                                         begin
944                                             typ := tp; rf := rf; normal := valpar;
945                                             adr := dx; lev := level; dx := dx + sz
946                                         end
947                                     end;
948                                 if sy <> rparent
949                                 then
950                                     begin
951                                         if sy = semicolon then insymbol
952                                         else begin error(14); if sy = comma then insymbol end;
953                                         test([ident, varsy], [rparent] + fsys, 6)
954                                         end
955                                     end
956                                 end { while };
957                                 if sy = rparent
958                                 then begin insymbol; test([semicolon, colon], fsys, 6) end
959                                 else error(4)
960                             end { parameterlist };
961
962 procedure constantdeclaration;
963
964 var
965     c: conrec;
966
967 begin
968     insymbol; test([ident], blockbegsys, 2);
969     while sy = ident do
970         begin
971             enter(id, konstant); insymbol;
972             if sy = eql then insymbol
973             else begin error(16); if sy = becomes then insymbol end;
974             constant([semicolon, comma, ident] + fsys, c);
975             tab[t].typ := c.tp; tab[t].ref := 0;
976             if c.tp = reals
977             then begin enterreal(c.r); tab[t].adr := c.l end
978             else tab[t].adr := c.i;
979             testsemicolon
980         end
981     end { constantdeclaration };
982
983 procedure typedeclaration;
984
985 var
986     tp: types;
987     rf, sz, t1: integer;
988
989 begin
990     offset := offset + elsz
991     begin
992         insymbol; test([ident], blockbegsys, 2);
993         while sy = ident do
994             begin
995                 enter(id, type1); t1 := t; insymbol;
996                 if sy = eql then insymbol
997                 else begin error(16); if sy = becomes then insymbol end;
998                 typ([semicolon, comma, ident] + fsys, tp, rf, sz);
999                 with tab[t1] do begin typ := tp; ref := rf; adr := sz end;
1000                 testsemicolon
1001             end
1002         end { typedeclaration };
1003
1004 procedure variabledeclaration;
1005
1006 var
1007     t0, t1, rf, sz: integer;
1008     tp: types;
1009
1010 begin
1011     insymbol;
1012     while sy = ident do
1013         begin
1014             t0 := t; entervariable;
1015             while sy = comma do begin insymbol; entervariable; end;
1016             if sy = colon then insymbol else error(5); t1 := t;
1017             typ([semicolon, comma, ident] + fsys, tp, rf, sz);
1018             while t0 < t1 do
1019                 begin
1020                     t0 := t0 + 1;
1021                     with tab[t0] do
1022                         begin
1023                             typ := tp; ref := rf; lev := level; adr := dx;
1024                             normal := true; dx := dx + sz
1025                         end
1026                     end;
1027                 testsemicolon
1028             end
1029         end
1030     end { variabledeclaration };
1031
1032 procedure procdeclaration;
1033
1034 var
1035     isfun: boolean;
1036
1037 begin
1038     isfun := sy = functionsy; insymbol;
1039     if sy <> ident then begin error(2); id := ' ' end;
1040     if isfun then enter(id, funktion) else enter(id, procedure);
1041     tab[t].normal := true; insymbol;
1042     block([semicolon] + fsys, isfun, level + 1);
1043     if sy = semicolon then insymbol else error(14);
1044     emit(32 + ord(isfun)) { exit }
1045     end { proceduredeclaration };
1046
1047 -----statement-----
1048
1049 procedure statement(fsys: symset);
1050
1051 var
1052     i: integer;
1053     x: item;
1054
1055 procedure expression(fsys: symset; var x: item);
1056     forward;
1057
1058 procedure selector(fsys: symset; var v: item);
1059
1060 var
1061     x: item;
1062     a, j: integer;
1063
1064 begin { sy in [lparent, lbrack, period] }
1065     repeat
1066         if sy = period
1067         then
1068             begin
1069                 insymbol;
1070                 { field selector }
1071                 if sy <> ident then error(2)
1072                 else
1073                     begin
1074                         if v.typ <> records then error(31)
1075                         else
1076                             begin { search field identifier }
1077                                 j := btab[v.ref].last; tab[0].name := id;
1078                                 while tab[j].name <> id do j := tab[j].link;
1079                                 if j = 0 then error(0); v.typ := tab[j].typ;
1080                                 v.ref := tab[j].ref; a := tab[j].adr;
1081                                 if a > 0 then emit(19, a)
1082                                 end;
1083                             end;
1084                         insymbol
1085                     end
1086                 end
1087             end
1088         else
1089             begin { array selector }
1090                 if sy <> lbrack then error(11);
1091                 repeat
1092                     insymbol; expression(fsys + [comma, rbrack], x);
1093                     if v.typ <> arrays then error(28)
1094                     else
1095                         begin
1096                             a := v.ref;
1097                             if atab[a].inxtyp <> x.typ then error(26)
1098                             else

```

```

1101         if atab[a].elsize = 1 then emit1(20, a)
1102         else emit1(21, a);
1103         v.typ := atab[a].eltyp; v.ref := atab[a].elref
1104     end
1105     until sy <> comma;
1106     if sy = rbrack then insymbol
1107     else
1108         begin error(12); if sy = rparent then insymbol end
1109     end
1110     until not (sy in [lbrack, lparent, period]);
1111     test(fsyz, [], 6)
1112     end { selector };
1113
1114 procedure call(fsyz: symset; i: integer);
1115
1116     var
1117         x: item;
1118         lastp, cp, k: integer;
1119
1120     begin
1121         emit1(18, i) { mark stack };
1122         lastp := btab[tab[i].ref].lastpar; cp := i;
1123         if sy = lparent
1124         then
1125             begin { actual parameter list }
1126                 repeat
1127                     insymbol;
1128                     if cp >= lastp then error(39)
1129                     else
1130                         begin
1131                             cp := cp + 1;
1132                             if tab[cp].normal
1133                             then
1134                                 begin { value parameter }
1135                                     expression(fsyz + [comma, colon, rparent], x);
1136                                     if x.typ = tab[cp].typ
1137                                     then
1138                                         begin
1139                                             if x.ref <> tab[cp].ref then error(36)
1140                                             else
1141                                                 if x.typ = arrays
1142                                                 then emit1(22, atab[x.ref].size)
1143                                                 else
1144                                                 if x.typ = records
1145                                                 then emit1(22, btab[x.ref].vsize)
1146                                                 end
1147                                                 else
1148                                                 if (x.typ = ints) and (tab[cp].typ = reals)
1149                                                 then emit1(26, 0)
1150                                                 else if x.typ <> notyp then error(36);
1151                                                 end
1152                                             end
1153                                         else
1154                                             begin { variable parameter }
1155                                                 if sy <> ident then error(2)
1156                                                 else
1157                                                     begin
1158                                                         k := loc(id); insymbol;
1159                                                         if k <> 0
1160                                                         then
1161                                                             begin
1162                                                                 if tab[k].obj <> variable
1163                                                                 then error(37);
1164                                                                 x.typ := tab[k].typ;
1165                                                                 x.ref := tab[k].ref;
1166                                                                 if tab[k].normal
1167                                                                 then emit2(0, tab[k].lev, tab[k].adr)
1168                                                                 else emit2(1, tab[k].lev, tab[k].adr);
1169                                                                 if sy in [lbrack, lparent, period] then
1170                                                                     selector(fsyz + [comma, colon, rparent],
1171                                                                     x);
1172                                                                 if (x.typ <> tab[cp].typ) or (x.ref <> tab
1173                                                                     [cp].ref)
1174                                                                 then error(36)
1175                                                                 end
1176                                                             end
1177                                                         end
1178                                                     end;
1179                                                     test([comma, rparent], fsyz, 6)
1180                                                     until sy <> comma;
1181                                                     if sy = rparent then insymbol else error(4)
1182                                                     end;
1183                                                     if cp < lastp then error(39) { too few actual parameters };
1184                                                     emit1(19, btab[tab[i].ref].psize - 1);
1185                                                     if tab[i].lev < level then emit2(3, tab[i].lev, level)
1186                                                     end { call };
1187
1188         function resulttype(a, b: types): types;
1189
1190         begin
1191             if (a > reals) or (b > reals)
1192             then begin error(33); resulttype := notyp end
1193             else
1194                 if (a = notyp) or (b = notyp) then resulttype := notyp
1195                 else
1196                     if a = ints
1197                     then
1198                         if b = ints then resulttype := ints
1199                         else begin resulttype := reals; emit1(26, 1) end
1200                     else
1201                         begin
1202                             resulttype := reals; if b = ints then emit1(26, 0)
1203                             end
1204                         end
1205                     end { resulttype };
1206
1207     procedure expression;
1208
1209     var
1210         y: item;
1211         op: symbol;
1212
1213     procedure simpleexpression(fsyz: symset; var x: item);
1214
1215     var
1216         y: item;
1217         op: symbol;
1218
1219     procedure term(fsyz: symset; var x: item);
1220
1221     var
1222         y: item;
1223         op: symbol;
1224         ts: typset;
1225
1226     procedure factor(fsyz: symset; var x: item);
1227
1228     var
1229         i, f: integer;
1230
1231     procedure standfct(n: integer);
1232
1233     var
1234         ts: typset;
1235
1236     begin { standard function no. n }
1237         if sy = lparent then insymbol else error(9);
1238         if n < 17
1239         then
1240             begin
1241                 expression(fsyz + [rparent], x);
1242                 case n of
1243                     0, 2:
1244                         begin { abs, sqrt }
1245                             ts := [ints, reals]; tab[i].typ := x.typ;
1246                             if x.typ = reals then n := n + 1
1247                             end;
1248                             4, 5: ts := [ints] { odd, chr };
1249                             6: ts := [ints, bools, chars, scalars] { ord };
1250                             7, 8:
1251                                 begin
1252                                     ts := [ints, bools, chars, scalars]
1253                                     { succ, pred };
1254                                     tab[i].typ := x.typ
1255                                 end;
1256                             9, 10, 11, 12, 13, 14, 15, 16:
1257                                 { round, truncate, sin, cos, ... }
1258                                 begin
1259                                     ts := [ints, reals];
1260                                     if x.typ = ints then emit1(26, 0)
1261                                     end
1262                                 end;
1263                             if x.typ in ts then emit1(8, n)
1264                             else if x.typ <> notyp then error(48);
1265                             end
1266                         else { eof, eoln }
1267                         begin { n in [17, 18] }
1268                             if sy <> ident then error(2)
1269                             else
1270                                 if id <> 'INPUT' then error(0)
1271                                 else insymbol;
1272                                 emit1(8, n);
1273                                 end;
1274                                 x.typ := tab[i].typ;
1275                                 if sy = rparent then insymbol else error(4)
1276                                 end { standfct };
1277
1278     begin { factor }
1279         x.typ := notyp; x.ref := 0; test(facbegsys, fsyz, 58);
1280         while sy in facbegsys do
1281             begin
1282                 if sy = ident
1283                 then
1284                     begin
1285                         i := loc(id); insymbol;
1286                         with tab[i] do
1287                             case obj of
1288                                 konstant:
1289                                     begin
1290                                         x.typ := typ; x.ref := 0;
1291                                         if x.typ = reals then emit1(25, adr)
1292                                         else emit1(24, adr)
1293                                     end;
1294                                 variable:
1295                                     begin
1296                                         x.typ := typ; x.ref := ref;
1297                                         if sy in [lbrack, lparent, period]
1298                                         then
1299                                             begin
1300                                                 if normal then f := 0 else f := 1;
1301                                                 emit2(f, lev, adr);
1302                                                 selector(fsyz, x);
1303                                                 if x.typ in stantyps then emit(34)
1304                                                 end
1305                                             end
1306                                         else
1307                                             begin
1308                                                 if x.typ in stantyps
1309                                                 then
1310                                                     then
1311                                                         if normal then f := 1
1312                                                         else f := 2
1313                                                         else
1314                                                         if normal then f := 0
1315                                                         else f := 1;
1316                                                         emit2(f, lev, adr)
1317                                                         end
1318                                                     end
1319                                                 end
1320                                             end
1321                                         end
1322                                     end
1323                                     end
1324                                     end
1325                                     end
1326                                     end
1327                                     end
1328                                     end
1329                                     end
1330                                     end
1331                                     end
1332                                     end
1333                                     end
1334                                     end
1335                                     end
1336                                     end
1337                                     end
1338                                     end
1339                                     end
1340                                     end
1341                                     end
1342                                     end
1343                                     end
1344                                     end
1345                                     end
1346                                     end
1347                                     end
1348                                     end
1349                                     end
1350                                     end
1351                                     end
1352                                     end
1353                                     end
1354                                     end
1355                                     end
1356                                     end
1357                                     end
1358                                     end
1359                                     end
1360                                     end
1361                                     end
1362                                     end
1363                                     end
1364                                     end
1365                                     end
1366                                     end
1367                                     end
1368                                     end
1369                                     end
1370                                     end
1371                                     end
1372                                     end
1373                                     end
1374                                     end
1375                                     end
1376                                     end
1377                                     end
1378                                     end
1379                                     end
1380                                     end
1381                                     end
1382                                     end
1383                                     end
1384                                     end
1385                                     end
1386                                     end
1387                                     end
1388                                     end
1389                                     end
1390                                     end
1391                                     end
1392                                     end
1393                                     end
1394                                     end
1395                                     end
1396                                     end
1397                                     end
1398                                     end
1399                                     end
1400                                     end
1401                                     end
1402                                     end
1403                                     end
1404                                     end
1405                                     end
1406                                     end
1407                                     end
1408                                     end
1409                                     end
1410                                     end
1411                                     end
1412                                     end
1413                                     end
1414                                     end
1415                                     end
1416                                     end
1417                                     end
1418                                     end
1419                                     end
1420                                     end
1421                                     end
1422                                     end
1423                                     end
1424                                     end
1425                                     end
1426                                     end
1427                                     end
1428                                     end
1429                                     end
1430                                     end
1431                                     end
1432                                     end
1433                                     end
1434                                     end
1435                                     end
1436                                     end
1437                                     end
1438                                     end
1439                                     end
1440                                     end
1441                                     end
1442                                     end
1443                                     end
1444                                     end
1445                                     end
1446                                     end
1447                                     end
1448                                     end
1449                                     end
1450                                     end
1451                                     end
1452                                     end
1453                                     end
1454                                     end
1455                                     end
1456                                     end
1457                                     end
1458                                     end
1459                                     end
1460                                     end
1461                                     end
1462                                     end
1463                                     end
1464                                     end
1465                                     end
1466                                     end
1467                                     end
1468                                     end
1469                                     end
1470                                     end
1471                                     end
1472                                     end
1473                                     end
1474                                     end
1475                                     end
1476                                     end
1477                                     end
1478                                     end
1479                                     end
1480                                     end
1481                                     end
1482                                     end
1483                                     end
1484                                     end
1485                                     end
1486                                     end
1487                                     end
1488                                     end
1489                                     end
1490                                     end
1491                                     end
1492                                     end
1493                                     end
1494                                     end
1495                                     end
1496                                     end
1497                                     end
1498                                     end
1499                                     end
1500                                     end
1501                                     end
1502                                     end
1503                                     end
1504                                     end
1505                                     end
1506                                     end
1507                                     end
1508                                     end
1509                                     end
1510                                     end
1511                                     end
1512                                     end
1513                                     end
1514                                     end
1515                                     end
1516                                     end
1517                                     end
1518                                     end
1519                                     end
1520                                     end
1521                                     end
1522                                     end
1523                                     end
1524                                     end
1525                                     end
1526                                     end
1527                                     end
1528                                     end
1529                                     end
1530                                     end
1531                                     end
1532                                     end
1533                                     end
1534                                     end
1535                                     end
1536                                     end
1537                                     end
1538                                     end
1539                                     end
1540                                     end
1541                                     end
1542                                     end
1543                                     end
1544                                     end
1545                                     end
1546                                     end
1547                                     end
1548                                     end
1549                                     end
1550                                     end
1551                                     end
1552                                     end
1553                                     end
1554                                     end
1555                                     end
1556                                     end
1557                                     end
1558                                     end
1559                                     end
1560                                     end
1561                                     end
1562                                     end
1563                                     end
1564                                     end
1565                                     end
1566                                     end
1567                                     end
1568                                     end
1569                                     end
1570                                     end
1571                                     end
1572                                     end
1573                                     end
1574                                     end
1575                                     end
1576                                     end
1577                                     end
1578                                     end
1579                                     end
1580                                     end
1581                                     end
1582                                     end
1583                                     end
1584                                     end
1585                                     end
1586                                     end
1587                                     end
1588                                     end
1589                                     end
1590                                     end
1591                                     end
1592                                     end
1593                                     end
1594                                     end
1595                                     end
1596                                     end
1597                                     end
1598                                     end
1599                                     end
1600                                     end
1601                                     end
1602                                     end
1603                                     end
1604                                     end
1605                                     end
1606                                     end
1607                                     end
1608                                     end
1609                                     end
1610                                     end
1611                                     end
1612                                     end
1613                                     end
1614                                     end
1615                                     end
1616                                     end
1617                                     end
1618                                     end
1619                                     end
1620                                     end
1621                                     end
1622                                     end
1623                                     end
1624                                     end
1625                                     end
1626                                     end
1627                                     end
1628                                     end
1629                                     end
1630                                     end
1631                                     end
1632                                     end
1633                                     end
1634                                     end
1635                                     end
1636                                     end
1637                                     end
1638                                     end
1639                                     end
1640                                     end
1641                                     end
1642                                     end
1643                                     end
1644                                     end
1645                                     end
1646                                     end
1647                                     end
1648                                     end
1649                                     end
1650                                     end
1651                                     end
1652                                     end
1653                                     end
1654                                     end
1655                                     end
1656                                     end
1657                                     end
1658                                     end
1659                                     end
1660                                     end
1661                                     end
1662                                     end
1663                                     end
1664                                     end
1665                                     end
1666                                     end
1667                                     end
1668                                     end
1669                                     end
1670                                     end
1671                                     end
1672                                     end
1673                                     end
1674                                     end
1675                                     end
1676                                     end
1677                                     end
1678                                     end
1679                                     end
1680                                     end
1681                                     end
1682                                     end
1683                                     end
1684                                     end
1685                                     end
1686                                     end
1687                                     end
1688                                     end
1689                                     end
1690                                     end
1691                                     end
1692                                     end
1693                                     end
1694                                     end
1695                                     end
1696                                     end
1697                                     end
1698                                     end
1699                                     end
1700                                     end
1701                                     end
1702                                     end
1703                                     end
1704                                     end
1705                                     end
1706                                     end
1707                                     end
1708                                     end
1709                                     end
1710                                     end
1711                                     end
1712                                     end
1713                                     end
1714                                     end
1715                                     end
1716                                     end
1717                                     end
1718                                     end
1719                                     end
1720                                     end
1721                                     end
1722                                     end
1723                                     end
1724                                     end
1725                                     end
1726                                     end
1727                                     end
1728                                     end
1729                                     end
1730                                     end
1731                                     end
1732                                     end
1733                                     end
1734                                     end
1735                                     end
1736                                     end
1737                                     end
1738                                     end
1739                                     end
1740                                     end
1741                                     end
1742                                     end
1743                                     end
1744                                     end
1745                                     end
1746                                     end
1747                                     end
1748                                     end
1749                                     end
1750                                     end
1751                                     end
1752                                     end
1753                                     end
1754                                     end
1755                                     end
1756                                     end
1757                                     end
1758                                     end
1759                                     end
1760                                     end
1761                                     end
1762                                     end
1763                                     end
1764                                     end
1765                                     end
1766                                     end
1767                                     end
1768                                     end
1769                                     end
1770                                     end
1771                                     end
1772                                     end
1773                                     end
1774                                     end
1775                                     end
1776                                     end
1777                                     end
1778                                     end
1779                                     end
1780                                     end
1781                                     end
1782                                     end
1783                                     end
1784                                     end
1785                                     end
1786                                     end
1787                                     end
1788                                     end
1789                                     end
1790                                     end
1791                                     end
1792                                     end
1793                                     end
1794                                     end
1795                                     end
1796                                     end
1797                                     end
1798                                     end
1799                                     end
1800                                     end
1801                                     end
1802                                     end
1803                                     end
1804                                     end
1805                                     end
1806                                     end
1807                                     end
1808                                     end
1809                                     end
1810                                     end
1811                                     end
1812                                     end
1813                                     end
1814                                     end
1815                                     end
1816                                     end
1817                                     end
1818                                     end
1819                                     end
1820                                     end
1821                                     end
1822                                     end
1823                                     end
1824                                     end
1825                                     end
1826                                     end
1827                                     end
1828                                     end
1829                                     end
1830                                     end
1831                                     end
1832                                     end
1833                                     end
1834                                     end
1835                                     end
1836                                     end
1837                                     end
1838                                     end
1839                                     end
1840                                     end
1841                                     end
1842                                     end
1843                                     end
1844                                     end
1845                                     end
1846                                     end
1847                                     end
1848                                     end
1849                                     end
1850                                     end
1851                                     end
1852                                     end
1853                                     end
1854                                     end
1855                                     end
1856                                     end
1857                                     end
1858                                     end
1859                                     end
1860                                     end
1861                                     end
1862                                     end
1863                                     end
1864                                     end
1865                                     end
1866                                     end
1867                                     end
1868                                     end
1869                                     end
1870                                     end
1871                                     end
1872                                     end
1873                                     end
1874                                     end
1875                                     end
1876                                     end
1877                                     end
1878                                     end
1879                                     end
1880                                     end
1881                                     end
1882                                     end
1883                                     end
1884                                     end
1885                                     end
1886                                     end
1887                                     end
1888                                     end
1889                                     end
1890                                     end
1891                                     end
1892                                     end
1893                                     end
1894                                     end
1895                                     end
1896                                     end
1897                                     end
1898                                     end
1899                                     end
1900                                     end
1901                                     end
1902                                     end
1903                                     end
1904                                     end
1905                                     end
1906                                     end
1907                                     end
1908                                     end
1909                                     end
1910                                     end
1911                                     end
1912                                     end
1913                                     end
1914                                     end
1915                                     end
1916                                     end
1917                                     end
1918                                     end
1919                                     end
1920                                     end
1921                                     end
1922                                     end
1923                                     end
1924                                     end
1925                                     end
1926                                     end
1927                                     end
1928                                     end
1929                                     end
1930                                     end
1931                                     end
1932                                     end
1933                                     end
1934                                     end
1935                                     end
1936                                     end
1937                                     end
1938                                     end
1939                                     end
1940                                     end
1941                                     end
1942                                     end
1943                                     end
1944                                     end
1945                                     end
1946                                     end
1947                                     end
1948                                     end
1949                                     end
1950                                     end
1951                                     end
1952                                     end
1953                                     end
1954                                     end
1955                                     end
1956                                     end
1957                                     end
1958                                     end
1959                                     end
1960                                     end
1961                                     end
1962                                     end
1963                                     end
1964                                     end
1965                                     end
1966                                     end
1967                                     end
1968                                     end
1969                                     end
1970                                     end
1971                                     end
1972                                     end
1973                                     end
1974                                     end
1975                                     end
1976                                     end
1977                                     end
1978                                     end
1979                                     end
1980                                     end
1981                                     end
1982                                     end
1983                                     end
1984                                     end
1985                                     end
1986                                     end
1987                                     end
1988                                     end
1989                                     end
1990                                     end
1991                                     end
1992                                     end
1993                                     end
1994                                     end
1995                                     end
1996                                     end
1997                                     end
1998                                     end
1999                                     end
2000                                     end

```

```

1321         end
1322     end;
1323     type1, procedure: error(44);
1324     funktion:
1325     begin
1326         x.typ := typ;
1327         if lev < 0 then call(fsyz, i)
1328         else standfct(adr)
1329         end
1330     end [ case, with ]
1331 end
1332 else
1333 if sy in [charcon, intcon, realcon]
1334 then
1335     begin
1336         if sy = realcon
1337         then
1338             begin
1339                 x.typ := reals; enterreal(rnum);
1340                 emit1(25, c1)
1341             end
1342         else
1343             begin
1344                 if sy = charcon then x.typ := chars
1345                 else x.typ := ints;
1346                 emit1(24, inum)
1347                 end;
1348                 x.ref := 0; insymbol
1349             end
1350         else
1351             if sy = lparent
1352             then
1353                 begin
1354                     insymbol; expression(fsyz + [rparent], x);
1355                     if sy = rparent then insymbol
1356                     else error(4)
1357                     end
1358                 else
1359                     if sy = notsy then
1360                     begin
1361                         insymbol; factor(fsyz, x);
1362                         if x.typ = bools then emit(35)
1363                         else if x.typ <> notyp then error(32)
1364                         end;
1365                         test(fsyz, facbegsys, 6)
1366                     end [ while ]
1367                 end [ factor ];
1368             end
1369         begin { term }
1370         factor(fsyz + [times, rdiv, idiv, imod, andsy], x);
1371         while sy in [times, rdiv, idiv, imod, andsy] do
1372             begin
1373                 op := sy; insymbol;
1374                 factor(fsyz + [times, rdiv, idiv, imod, andsy], y);
1375                 if op = times
1376                 then
1377                     begin
1378                         x.typ := resulttype(x.typ, y.typ);
1379                         case x.typ of
1380                             notyp;
1381                             ints: emit(57);
1382                             reals: emit(60)
1383                         end
1384                     end
1385                 else
1386                     if op = rdiv
1387                     then
1388                         begin
1389                             if x.typ = ints
1390                             then begin emit1(26, 1); x.typ := reals end;
1391                             if y.typ = ints
1392                             then begin emit1(26, 0); y.typ := reals end;
1393                             if (x.typ = reals) and (y.typ = reals)
1394                             then emit(61)
1395                             else
1396                                 begin
1397                                     if (x.typ <> notyp) and (y.typ <> notyp)
1398                                     then error(33);
1399                                     x.typ := notyp
1400                                 end
1401                             end
1402                         end
1403                     else
1404                         if op = andsy
1405                         then
1406                             begin
1407                                 if (x.typ = bools) and (y.typ = bools)
1408                                 then emit(56)
1409                                 else
1410                                     begin
1411                                         if (x.typ <> notyp) and (y.typ <> notyp)
1412                                         then error(32);
1413                                         x.typ := notyp
1414                                     end
1415                                 end
1416                             end
1417                         else
1418                             begin { op in [idiv, imod] }
1419                                 if (x.typ = ints) and (y.typ = ints)
1420                                 then
1421                                     if op = idiv then emit(58) else emit(59)
1422                                     else
1423                                         begin
1424                                             if (x.typ <> notyp) and (y.typ <> notyp)
1425                                             then error(34);
1426                                             x.typ := notyp
1427                                         end
1428                                     end
1429                                 end
1430                             end [ term ];
1431
1432         begin [ simpleexpression ]
1433         if sy in [plus, minus]
1434         then
1435             begin
1436                 op := sy; insymbol; term(fsyz + [plus, minus], x);
1437                 if x.typ > reals then error(33)
1438                 else
1439                     if op = minus
1440                     then if x.typ = reals then emit(64) else emit(37)
1441                     end
1442                 else term(fsyz + [plus, minus, orsy], x);
1443                 while sy in [plus, minus, orsy] do
1444                     begin
1445                         op := sy; insymbol;
1446                         term(fsyz + [plus, minus, orsy], y);
1447                         if op = orsy
1448                         then
1449                             begin
1450                                 if (x.typ = bools) and (y.typ = bools)
1451                                 then emit(51)
1452                                 else
1453                                     begin
1454                                         if (x.typ <> notyp) and (y.typ <> notyp)
1455                                         then error(32);
1456                                         x.typ := notyp
1457                                     end
1458                                 end
1459                             else
1460                                 begin
1461                                     x.typ := resulttype(x.typ, y.typ);
1462                                     case x.typ of
1463                                         notyp;
1464                                         ints: if op = plus then emit(52) else emit(53);
1465                                         reals: if op = plus then emit(54) else emit(55)
1466                                     end
1467                                 end
1468                             end
1469                         end [ simpleexpression ];
1470
1471         begin { expression }
1472         simpleexpression(fsyz + [becomes, eql, neq, lss, leq, gtr, geq],
1473         x);
1474         if sy in [becomes, eql, neq, lss, leq, gtr, geq]
1475         then
1476             begin
1477                 if sy = becomes then begin error(6); op := eql end
1478                 else op := sy;
1479                 insymbol; simpleexpression(fsyz, y);
1480                 if (x.typ in [notyp, ints, bools, chars, scalars]) and (x.
1481                 typ = y.typ) and (x.ref = y.ref)
1482                 then
1483                     case op of
1484                         eql: emit(45);
1485                         neq: emit(46);
1486                         lss: emit(47);
1487                         leq: emit(48);
1488                         gtr: emit(49);
1489                         geq: emit(50)
1490                     end
1491                 else
1492                     begin
1493                         if x.typ = ints
1494                         then begin x.typ := reals; emit1(26, 1) end
1495                         else
1496                             if y.typ = ints
1497                             then begin y.typ := reals; emit1(26, 0) end;
1498                             if (x.typ = reals) and (y.typ = reals)
1499                             then
1500                                 case op of
1501                                     eql: emit(39);
1502                                     neq: emit(40);
1503                                     lss: emit(41);
1504                                     leq: emit(42);
1505                                     gtr: emit(43);
1506                                     geq: emit(44)
1507                                 end
1508                             else error(35)
1509                             end;
1510                             x.typ := bools
1511                         end
1512                     end [ expression ];
1513
1514         procedure assignment(lv, ad: integer);
1515
1516         var
1517             x, y: item;
1518             f: integer;
1519             { tab[i].obj in [variable, procedure] }
1520
1521         begin
1522             x.typ := tab[i].typ; x.ref := tab[i].ref;
1523             if tab[i].normal then f := 0 else f := 1;
1524             emit2(f, lv, ad);
1525             if sy in [lbrack, lparent, period]
1526             then selector([becomes, eql] + fsyz, x);
1527             if sy = becomes then insymbol
1528             else begin error(51); if sy = eql then insymbol end;
1529             expression(fsyz, y);
1530             if x.typ = y.typ
1531             then
1532                 if x.typ in stantyps then emit(38)
1533                 else
1534                     if x.ref <> y.ref then error(46)
1535                     else
1536                         if x.typ = arrays then emit1(23, atab[x.ref].size)
1537                         else emit1(23, btab[x.ref].vsize)
1538                     end
1539                 end
1540             else

```



```

1761 x.typ := tab[i].typ;
1762 x.ref := tab[i].ref;
1763 if tab[i].normal then f := 0
1764 else f := 1;
1765 emit2(f, tab[i].lev, tab[i].adr);
1766 if sy in [lbrack, lparent, period]
1767 then selector(fsyz + [comma, rparent], x);
1768 if x.typ in [ints, reals, chars, notyp]
1769 then emit1(27, ord(x.typ))
1770 else error(40)
1771 end
1772 end;
1773 test([comma, rparent], fsyz, 6);
1774 until sy <> comma;
1775 if sy = rparent then insymbol else error(4)
1776 end;
1777 if n = 2 then emit(62)
1778 end;
1779 3, 4:
1780 begin { write }
1781 if sy = lparent
1782 then
1783 begin
1784 repeat
1785 insymbol;
1786 if sy = string
1787 then
1788 begin
1789 emit1(24, sleng); emit1(28, inum); insymbol
1790 end
1791 else
1792 begin
1793 expression(fsyz + [comma, colon, rparent], x);
1794 if not (x.typ in (stantyps - [scalars]))
1795 then error(41);
1796 if sy = colon
1797 then
1798 begin
1799 insymbol;
1800 expression(fsyz + [comma, colon, rparent], y
1801 );
1802 if y.typ <> ints then error(43);
1803 if sy = colon
1804 then
1805 begin
1806 if x.typ <> reals then error(42);
1807 insymbol;
1808 expression(fsyz + [comma, rparent], y);
1809 if y.typ <> ints then error(43);
1810 emit(37)
1811 end
1812 else emit1(30, ord(x.typ))
1813 end
1814 else emit1(29, ord(x.typ))
1815 end
1816 until sy <> comma;
1817 if sy = rparent then insymbol else error(4)
1818 end;
1819 if n = 4 then emit(63)
1820 end
1821 end { case }
1822 end { standproc };
1823
1824
1825 begin { statement }
1826 if sy in statbegsys + [ident]
1827 then
1828 case sy of
1829 ident:
1830 begin
1831 i := loc(id); insymbol;
1832 if i <> 0
1833 then
1834 case tab[i].obj of
1835 konstant, type1: error(45);
1836 variable: assignment(tab[i].lev, tab[i].adr);
1837 procedure:
1838 if tab[i].lev <> 0 then call(fsyz, i)
1839 else standproc(tab[i].adr);
1840 funktion:
1841 if tab[i].ref = display[level]
1842 then assignment(tab[i].lev + 1, 0)
1843 else error(45)
1844 end
1845 end;
1846 beginsy: compoundstatement;
1847 ifsy: ifstatement;
1848 casesy: casestatement;
1849 whilesy: whilestatement;
1850 repeatsy: repeatstatement;
1851 forsy: forstatement
1852 end;
1853 test(fsyz, [], 14)
1854 end { statement };
1855
1856
1857 begin { block }
1858 dx := 5; prt := t; if level > lmax then fatal(5);
1859 test([lparent, colon, semicolon], fsyz, 14); enterblock;
1860 display[level] := b; prb := b; tab[prt].typ := notyp;
1861 tab[prt].ref := prb;
1862 if (sy = lparent) and (level > 1) then parameterlist;
1863 btab[prb].lastpar := t; btab[prb].psize := dx;
1864 if isfun
1865 then
1866 if sy = colon
1867 then
1868 begin
1869 insymbol { function type };
1870 if sy = ident

```

```

1871 then
1872 begin
1873 x := loc(id); insymbol;
1874 if x <> 0 then
1875 if tab[x].obj <> type1 then error(29)
1876 else
1877 if tab[x].typ in stantyps
1878 then tab[prt].typ := tab[x].typ
1879 else error(15)
1880 end
1881 else skip([semicolon] + fsyz, 2)
1882 end
1883 else error(5);
1884 if sy = semicolon then insymbol else error(14);
1885 repeat
1886 if sy = constsy then constantdeclaration;
1887 if sy = typesy then typedeclaration;
1888 if sy = varsy then variabledeclaration; btab[prb].vsize := dx;
1889 while sy in [proceduresy, functionsy] do proceduredeclaration;
1890 test([beginsy], blockbegsys + statbegsys, 56)
1891 until sy in statbegsys;
1892 tab[prt].adr := lc; insymbol;
1893 statement([semicolon, endsy] + fsyz);
1894 while sy in [semicolon] + statbegsys do
1895 begin
1896 if sy = semicolon then insymbol else error(14);
1897 statement([semicolon, endsy] + fsyz)
1898 end;
1899 if sy = endsy then insymbol else error(57);
1900 test(fsyz + [period], [], 6)
1901 end { block };
1902
1903 { -----interpret----- }
1904
1905 procedure interpret;
1906 [ global code, tab, btab ]
1907
1908
1909 Label
1910 98 { Wirth used a 'trap label' (non-standard) here
1911 to catch run time errors. See notes for alternate solution. };
1912
1913 var
1914 ir: order { instruction buffer };
1915 pc: integer { program counter };
1916 ps:
1917 (run, fin, caschk, divchk, inxchk, stkchk, linchk, lngchk, redchk)
1918 ;
1919 t: integer { top stack index };
1920 b: integer { base index };
1921 lncnt, ocnt, blkcnt, chrcnt: integer { counters };
1922 h1, h2, h3, h4: integer;
1923 fld: array [1..4] of integer { default field widths };
1924 display: array [1..lmax] of integer;
1925 s: array [1..stacksize] of { blockmark:
1926 record
1927 case types of { s[b+0] = fct result }
1928 ints: (i: integer); { s[b+1] = return adr }
1929 reals: (r: real); { s[b+2] = static link }
1930 bools: (b: boolean); { s[b+3] = dynamic link }
1931 chars: (c: char) { s[b+4] = table index }
1932 end;
1933
1934 begin { interpret }
1935 s[1].i := 0; s[2].i := 0; s[3].i := -1;
1936 s[4].i := btab[1].last; b := 0; display[1] := 0;
1937 t := btab[2].vsize - 1; pc := tab[s[4].i].adr; ps := run;
1938 lncnt := 0; ocnt := 0; chrcnt := 0; fld[1] := 10;
1939 fld[2] := 22; fld[3] := 10; fld[4] := 1;
1940 repeat
1941 ir := code[pc]; pc := pc + 1;
1942 if ocnt < maxint then ocnt := ocnt + 1;
1943 case ir.f of
1944 0:
1945 begin { load address }
1946 t := t + 1;
1947 if t > stacksize then ps := stkchk
1948 else s[t].i := display[ir.x] + ir.y
1949 end;
1950 1:
1951 begin { load value }
1952 t := t + 1;
1953 if t > stacksize then ps := stkchk
1954 else s[t].i := s[display[ir.x] + ir.y]
1955 end;
1956 2:
1957 begin { load indirect }
1958 t := t + 1;
1959 if t > stacksize then ps := stkchk
1960 else s[t].i := s[s[display[ir.x] + ir.y].i]
1961 end;
1962 3:
1963 begin { update display }
1964 h1 := ir.y; h2 := ir.x; h3 := b;
1965 repeat
1966 display[h1] := h3; h1 := h1 - 1; h3 := s[h3 + 2].i
1967 until h1 = h2
1968 end;
1969 4:
1970 case ir.y of
1971 0: s[t].i := abs(s[t].i);
1972 1: s[t].r := abs(s[t].r);
1973 2: s[t].i := sqr(s[t].i);
1974 3: s[t].r := sqr(s[t].r);
1975 4: s[t].b := odd(s[t].i);
1976 5:
1977 begin { s[t].c := chr(s[t].i); }

```

```

1981         if (s[t].i < 0) or (s[t].i > 127) then ps := inxchk 2091
1982         end; 2092
1983         6: { s[t].i := ord(s[t].c) }; 2093
1984         7: s[t].c := succ(s[t].c); 2094
1985         8: s[t].c := pred(s[t].c); 2095
1986         9: s[t].i := round(s[t].r); 2096
1987         10: s[t].i := trunc(s[t].r); 2097
1988         11: s[t].r := sin(s[t].r); 2098
1989         12: s[t].r := cos(s[t].r); 2099
1990         13: s[t].r := exp(s[t].r); 2100
1991         14: s[t].r := ln(s[t].r); 2101
1992         15: s[t].r := sqrt(s[t].r); 2102
1993         16: s[t].r := arctan(s[t].r); 2103
1994         17: 2104
1995         begin 2105
1996         t := t + 1; 2106
1997         if t > stacksize then ps := stkchk 2107
1998         else s[t].b := eof(input) 2108
1999         end; 2109
2000         18: 2110
2001         begin 2111
2002         t := t + 1; 2112
2003         if t > stacksize then ps := stkchk 2113
2004         else s[t].b := eoln(input) 2114
2005         end 2115
2006         end; 2116
2007         9: s[t].i := s[t].i + ir.y { offset }; 2117
2008         10: pc := ir.y { jump }; 2118
2009         11: 2119
2010         begin { conditional jump } 2120
2011         if not s[t].b then pc := ir.y; t := t - 1 2121
2012         end; 2122
2013         12: 2123
2014         begin { switch } 2124
2015         h1 := s[t].i; t := t - 1; h2 := ir.y; h3 := 0; 2125
2016         repeat 2126
2017         if code[h2].f <> 13 2127
2018         then begin h3 := 1; ps := caschk end 2128
2019         else 2129
2020         if code[h2].y = h1 2130
2021         then begin h3 := 1; pc := code[h2 + 1].y end 2131
2022         else h2 := h2 + 2 2132
2023         until h3 < 0 2133
2024         end; 2134
2025         14: 2135
2026         begin { for1up } 2136
2027         h1 := s[t - 1].i; 2137
2028         if h1 <= s[t].i then s[s[t - 2].i].i := h1 2138
2029         else begin t := t - 3; pc := ir.y end 2139
2030         end; 2140
2031         15: 2141
2032         begin { for2up } 2142
2033         h2 := s[t - 2].i; h1 := s[h2].i + 1; 2143
2034         if h1 <= s[t].i 2144
2035         then begin s[h2].i := h1; pc := ir.y end 2145
2036         else t := t - 3; 2146
2037         end; 2147
2038         16: 2148
2039         begin { for1down } 2149
2040         h1 := s[t - 1].i; 2150
2041         if h1 >= s[t].i then s[s[t - 2].i].i := h1 2151
2042         else begin pc := ir.y; t := t - 3 end 2152
2043         end; 2153
2044         17: 2154
2045         begin { for2down } 2155
2046         h2 := s[t - 2].i; h1 := s[h2].i - 1; 2156
2047         if h1 >= s[t].i 2157
2048         then begin s[h2].i := h1; pc := ir.y end 2158
2049         else t := t - 3; 2159
2050         end; 2160
2051         18: 2161
2052         begin { mark stack } 2162
2053         h1 := btab[tab[ir.y].ref].vsize; 2163
2054         if t + h1 > stacksize then ps := stkchk 2164
2055         else 2165
2056         begin 2166
2057         t := t + 5; s[t - 1].i := h1 - 1; s[t].i := ir.y 2167
2058         end 2168
2059         end; 2169
2060         19: 2170
2061         begin { call } 2171
2062         h1 := t - ir.y { h1 points to base }; 2172
2063         h2 := s[h1 + 4].i { h2 points to tab }; h3 := tab[h2].lev; 2173
2064         display[h3 + 1] := h1; h4 := s[h1 + 3].i + h1; 2174
2065         s[h1 + 1].i := pc; s[h1 + 2].i := display[h3]; 2175
2066         s[h1 + 3].i := b; for h3 := t + 1 to h4 do s[h3].i := 0; 2176
2067         b := h1; t := h4; pc := tab[h2].adr 2177
2068         end; 2178
2069         20: 2179
2070         begin { index1 } 2180
2071         h1 := ir.y { h1 points to atab }; h2 := atab[h1].low; 2181
2072         h3 := s[t].i; 2182
2073         if h3 < h2 then ps := inxchk 2183
2074         else 2184
2075         if h3 > atab[h1].high then ps := inxchk 2185
2076         else begin t := t - 1; s[t].i := s[t].i + (h3 - h2) end 2186
2077         end; 2187
2078         21: 2188
2079         begin { index } 2189
2080         h1 := ir.y { h1 points to atab }; h2 := atab[h1].low; 2190
2081         h3 := s[t].i; 2191
2082         if h3 < h2 then ps := inxchk 2192
2083         else 2193
2084         if h3 > atab[h1].high then ps := inxchk 2194
2085         else 2195
2086         begin 2196
2087         t := t - 1; 2197
2088         s[t].i := s[t].i + (h3 - h2) * atab[h1].elsize 2198
2089         end 2199
2090         end; 2200
22: 2201
22: begin { load block } 2202
22: h1 := s[t].i; t := t - 1; h2 := ir.y + t; 2203
22: if h2 > stacksize then ps := stkchk 2204
22: else 2205
22: while t < h2 do 2206
22: begin t := t + 1; s[t] := s[h1]; h1 := h1 + 1 end 2207
22: end; 2208
22: 23: 2209
22: begin { copy block } 2210
22: h1 := s[t - 1].i; h2 := s[t].i; h3 := h1 + ir.y; 2211
22: while h1 < h3 do 2212
22: begin s[h1] := s[h2]; h1 := h1 + 1; h2 := h2 + 1 end; 2213
22: t := t - 2 2214
22: end; 2215
22: 24: 2216
22: begin { literal } 2217
22: t := t + 1; 2218
22: if t > stacksize then ps := stkchk else s[t].i := ir.y 2219
22: end; 2220
22: 25: 2221
22: begin { load real } 2222
22: t := t + 1; 2223
22: if t > stacksize then ps := stkchk 2224
22: else s[t].r := rconst[ir.y] 2225
22: end; 2226
22: 26: begin { float } h1 := t - ir.y; s[h1].r := s[h1].i end; 2227
22: 27: 2228
22: begin { read } 2229
22: if eof(input) then ps := redchk 2230
22: else 2231
22: case ir.y of 2232
22: 1: read(s[s[t].i].i); 2233
22: 2: read(s[s[t].i].r); 2234
22: 4: begin s[s[t].i].i := 0; read(s[s[t].i].c) end 2235
22: end; 2236
22: t := t - 1 2237
22: end; 2238
22: 28: 2239
22: begin { write string } 2240
22: h1 := s[t].i; h2 := ir.y; t := t - 1; 2241
22: chrnt := chrnt + h1; 2242
22: if chrnt > lineleng then ps := lngchk; 2243
22: repeat write(stab[h2]); h1 := h1 - 1; h2 := h2 + 1 2244
22: until h1 = 0 2245
22: end; 2246
22: 29: 2247
22: begin { write1 } 2248
22: chrnt := chrnt + fld[ir.y]; 2249
22: if chrnt > lineleng then ps := lngchk 2250
22: else 2251
22: case ir.y of 2252
22: 1: write(s[t].i: fld[1]); 2253
22: 2: write(s[t].r: fld[2]); 2254
22: 3: write(s[t].b: fld[3]); 2255
22: 4: write(chr(s[t].i mod 127 { ASCII })) 2256
22: end; 2257
22: t := t - 1 2258
22: end; 2259
22: 30: 2260
22: begin { write2 } 2261
22: chrnt := chrnt + s[t].i; 2262
22: if chrnt > lineleng then ps := lngchk 2263
22: else 2264
22: case ir.y of 2265
22: 1: write(s[t - 1].i: s[t].i); 2266
22: 2: write(s[t - 1].r: s[t].i); 2267
22: 3: write(s[t - 1].b: s[t].i); 2268
22: 4: write(chr(s[t - 1].i mod 127 { ASCII }); s[t].i) 2269
22: end; 2270
22: t := t - 2 2271
22: end; 2272
22: 31: ps := fin; 2273
22: 32: 2274
22: begin { exit procedure } 2275
22: t := b - 1; pc := s[b + 1].i; b := s[b + 3].i 2276
22: end; 2277
22: 33: 2278
22: begin { exit function } 2279
22: t := b; pc := s[b + 1].i; b := s[b + 3].i 2280
22: end; 2281
22: 34: s[t] := s[s[t].i]; 2282
22: 35: s[t].b := not s[t].b; 2283
22: 36: s[t].i := -s[t].i; 2284
22: 37: 2285
22: begin 2286
22: chrnt := chrnt + s[t - 1].i; 2287
22: if chrnt > lineleng then ps := lngchk 2288
22: else write(s[t - 2].r: s[t - 1].i: s[t].i); 2289
22: t := t - 3 2290
22: end; 2291
22: 38: begin { store } s[s[t - 1].i] := s[t]; t := t - 2 end; 2292
22: 39: begin t := t - 1; s[t].b := s[t].r = s[t + 1].r end; 2293
22: 40: begin t := t - 1; s[t].b := s[t].r <> s[t + 1].r end; 2294
22: 41: begin t := t - 1; s[t].b := s[t].r < s[t + 1].r end; 2295
22: 42: begin t := t - 1; s[t].b := s[t].r <= s[t + 1].r end; 2296
22: 43: begin t := t - 1; s[t].b := s[t].r > s[t + 1].r end; 2297
22: 44: begin t := t - 1; s[t].b := s[t].r >= s[t + 1].r end; 2298
22: 45: begin t := t - 1; s[t].b := s[t].i < s[t + 1].i end; 2299
22: 46: begin t := t - 1; s[t].b := s[t].i <> s[t + 1].i end; 2300
22: 47: begin t := t - 1; s[t].b := s[t].i <= s[t + 1].i end; 2301
22: 48: begin t := t - 1; s[t].b := s[t].i <= s[t + 1].i end; 2302
22: 49: begin t := t - 1; s[t].b := s[t].i > s[t + 1].i end; 2303
22: 50: begin t := t - 1; s[t].b := s[t].i >= s[t + 1].i end; 2304
22: 51: begin t := t - 1; s[t].b := s[t].b or s[t + 1].b end; 2305
22: 52: begin t := t - 1; s[t].i := s[t].i + s[t + 1].i end; 2306
22: 53: begin t := t - 1; s[t].i := s[t].i - s[t + 1].i end; 2307
22: 54: begin t := t - 1; s[t].r := s[t].r + s[t + 1].r end; 2308
22: 55: begin t := t - 1; s[t].r := s[t].r - s[t + 1].r end; 2309
22: 56: begin t := t - 1; s[t].b := s[t].b and s[t + 1].b end; 2310

```

```

2201 57: begin t := t - 1; s[t].i := s[t].i * s[t + 1].i end;
2202 58:
2203   begin
2204     t := t - 1;
2205     if s[t + 1].i = 0 then ps := divchk
2206     else s[t].i := s[t].i div s[t + 1].i
2207   end;
2208 59:
2209   begin
2210     t := t - 1;
2211     if s[t + 1].i = 0 then ps := divchk
2212     else s[t].i := s[t].i mod s[t + 1].i
2213   end;
2214 60: begin t := t - 1; s[t].r := s[t].r * s[t + 1].r; end;
2215 61:
2216   begin
2217     t := t - 1;
2218     if s[t + 1].r = 0.0 then ps := divchk
2219     else s[t].r := s[t].r / s[t + 1].r
2220   end;
2221 62: if eof(input) then ps := redchk else readln;
2222 63:
2223   begin
2224     writeln; lncnt := lncnt + 1; chrct := 0;
2225     if lncnt > linelimit then ps := linchk
2226   end;
2227 64: s[t].r := - s[t].r
2228   end { case };
2229 until ps <> run;
2230 98: if ps <> fin
2231   then
2232     begin
2233       writeln; writeln; write(' halt at', pc: 5, ' because of ');
2234       case ps of
2235         run: writeln('error (see dayfile)');
2236         caschk: writeln('undefined case');
2237         divchk: writeln('division by 0');
2238         inxchk: writeln('invalid index');
2239         stkchk: writeln('storage overflow');
2240         linchk: writeln('too much output');
2241         lngchk: writeln('line too long');
2242         redchk: writeln('reading past end of file');
2243       end;
2244       h1 := b; blkcnt := 10;
2245       { post mortem dump }
2246       repeat
2247         writeln; blkcnt := blkcnt - 1;
2248         if blkcnt = 0 then h1 := 0; h2 := s[h1 + 4].i;
2249         if h1 <> 0
2250         then writeln(' ', tab[h2].name, ' called at', s[h1 + 1].i: 5);
2251         h2 := btatab[h2].ref].last;
2252         while h2 <> 0 do
2253           with tab[h2] do
2254             begin
2255               if obj = variable
2256               then
2257                 if typ in stantyps
2258                 then
2259                   begin
2260                     write(' ', name, ' = ');
2261                     if normal then h3 := h1 + adr
2262                     else h3 := s[h1 + adr].i;
2263                     case typ of
2264                       ints: writeln(s[h3].i);
2265                       reals: writeln(s[h3].r);
2266                       bools: writeln(s[h3].b);
2267                       chars:
2268                         writeln(chr(s[h3].i mod 127 { ASCII }));
2269                     end
2270                   end;
2271                   h2 := link
2272                 end;
2273                 h1 := s[h1 + 3].i
2274               until h1 < 0;
2275             end;
2276             writeln;
2277             if ocnt = maxint then write(' many') else write(ocnt);
2278             writeln(' steps. ');
2279           end { interpret };
2280         end;
2281       { -----main----- }
2282     end;
2283   begin { main }
2284     writeln(tty, '- pascals (10.2.76)'); key[1] := 'AND';
2285     key[2] := 'ARRAY'; key[3] := 'BEGIN';
2286     key[4] := 'CASE'; key[5] := 'CONST';
2287     key[6] := 'DIV'; key[7] := 'DO';
2288     key[8] := 'DOWNTO'; key[9] := 'ELSE';
2289     key[10] := 'END'; key[11] := 'FOR';
2290     key[12] := 'FUNCTION'; key[13] := 'IF';
2291     key[14] := 'MOD'; key[15] := 'NOT';
2292     key[16] := 'OF'; key[17] := 'OR';
2293     key[18] := 'PROCEDURE'; key[19] := 'PROGRAM';
2294     key[20] := 'RECORD'; key[21] := 'REPEAT';
2295     key[22] := 'THEN'; key[23] := 'TO';
2296     key[24] := 'TYPE'; key[25] := 'UNTIL';
2297     key[26] := 'VAR'; key[27] := 'WHILE'; ksy[1] := andsy;
2298     ksy[2] := arrays; ksy[3] := beginsy; ksy[4] := casesy;
2299     ksy[5] := constsy; ksy[6] := idiv; ksy[7] := dosy;
2300     ksy[8] := downtosy; ksy[9] := elsesy; ksy[10] := endsy;
2301     ksy[11] := forsy; ksy[12] := functionsy; ksy[13] := ifsy;
2302     ksy[14] := imod; ksy[15] := notsy; ksy[16] := ofsy;
2303     ksy[17] := orsy; ksy[18] := proceduresy; ksy[19] := programsy;
2304     ksy[20] := recordsy; ksy[21] := repeatsy; ksy[22] := thensy;
2305     ksy[23] := tosy; ksy[24] := typesy; ksy[25] := untilsy;
2306     ksy[26] := varsy; ksy[27] := whitesy; sps['+'] := plus;
2307     sps['-'] := minus; sps['*'] := times; sps['/'] := rdiv;
2308     sps['('] := lparent; sps[')'] := rparent; sps['='] := eql;
2309     sps[';'] := comma; sps['['] := lbrack; sps[']'] := rbrack;
2310     sps[':'] := semicolon;
2311     constbegsys := [plus, minus, intcon, realcon, charcon, ident];
2312     typebegsys := [lparent, ident, arraysy, recordsy];
2313     blockbegsys := [constsy, typesy, varsy, proceduresy, functionsy,
2314     beginsy];
2315     facbegsys := [intcon, realcon, charcon, ident, lparent, notsy];
2316     statbegsys := [beginsy, ifsy, whitesy, repeatsy, forsy, casesy];
2317     stantyps := [notyp, ints, reals, bools, chars, scalars]; lc := 0;
2318     ll := 0; cc := 0; ch := ' '; errpos := 0; errs := [];
2319     { } reset(input, 'MYPROG.PAS', 'DPO:');
2320     insymbol; t := - 1; a := 0;
2321     b := 1; sx := 0; c2 := 0; display[0] := 1; iflag := false;
2322     oflag := false; skipflag := false;
2323     if sy <> programsy then error(3)
2324   else
2325     begin
2326       insymbol;
2327       if sy <> ident then error(2)
2328     else
2329       begin
2330         progname := id; insymbol;
2331         if sy <> lparent then error(9)
2332       else
2333         repeat
2334           insymbol;
2335           if sy <> ident then error(2)
2336         else
2337           begin
2338             if id = 'INPUT' then iflag := true
2339           else
2340             if id = 'OUTPUT' then oflag := true
2341           else error(0);
2342           insymbol
2343         end
2344       until sy <> comma;
2345       if sy = rparent then insymbol else error(4);
2346       if not oflag then error(20)
2347     end
2348   end;
2349   enter(' ', variable, notyp, 0) { sentinel };
2350   enter('FALSE', konstant, bools, 0);
2351   enter('TRUE', konstant, bools, 1);
2352   enter('REAL', type1, reals, 1);
2353   enter('CHAR', type1, chars, 1);
2354   enter('BOOLEAN', type1, bools, 1);
2355   enter('INTEGER', type1, ints, 1);
2356   enter('ABS', funktion, reals, 0);
2357   enter('SQR', funktion, reals, 2);
2358   enter('ODD', funktion, bools, 4);
2359   enter('CHR', funktion, chars, 5);
2360   enter('ORD', funktion, ints, 6);
2361   enter('SUCC', funktion, chars, 7);
2362   enter('PRED', funktion, chars, 8);
2363   enter('ROUND', funktion, ints, 9);
2364   enter('TRUNC', funktion, ints, 10);
2365   enter('SIN', funktion, reals, 11);
2366   enter('COS', funktion, reals, 12);
2367   enter('EXP', funktion, reals, 13);
2368   enter('LN', funktion, reals, 14);
2369   enter('SQRT', funktion, reals, 15);
2370   enter('ARCTAN', funktion, reals, 16);
2371   enter('EOF', funktion, bools, 17);
2372   enter('EOLN', funktion, bools, 18);
2373   enter('READ', prozedure, notyp, 1);
2374   enter('READLN', prozedure, notyp, 2);
2375   enter('WRITE', prozedure, notyp, 3);
2376   enter('WRITELN', prozedure, notyp, 4);
2377   enter(' ', prozedure, notyp, 0);
2378   with btatab[1] do
2379     begin last := t; lastpar := 1; psize := 0; vsize := 0 end;
2380   block(blockbegsys + statbegsys, false, 1);
2381   if sy <> period then error(22); emit(31) { halt };
2382   if btatab[2].vsize > stacksize then error(49);
2383   if progname = 'TESTO' then printtables;
2384   if errs = []
2385   then
2386     begin
2387       if iflag
2388       then
2389         begin
2390           reset(input, 'MYPROG.DAT', 'DPO:');
2391           if eof(input) then writeln(' input data missing')
2392         else
2393           begin
2394             writeln(' (eor)') { copy input data };
2395             while not eof(input) do
2396               begin
2397                 write(' ');
2398                 while not eoln(input) do
2399                   begin read(ch); write(ch) end;
2400                 writeln; read(ch)
2401               end;
2402             reset(input);
2403           end
2404         end;
2405       writeln(' (eof)'); writeln; interpret
2406     else errormsg;
2407   end
2408   99: writeln
2409   end { pascals }.

```



```

procedure timeoutsave;
{
  This routine is called if a time out occurs. It is called
  by the main routine if the timeout flag is set during a
  recovery. Upon 'reprieve' invocation, enough additional
  time is allocated so that a user can save his/her program
  to a file. After exiting Pascal-I, more time can be
  requested (with ETL) or another login session started.
  The saved file allows the user to procede from where he/she
  left off.
}
var
  lfn: scopelfn;
begin
  writeln(' You are out of time. Please enter the name of');
  writeln(' the file to which you want your program saved -');
  { putseg(output); flush buffer }
  if eos(input) then getseg(input); getch;
  { The eos (end of segment) and getseg (get segment) are
  rather unpleasent ways to interface to terminals.
  Fortunately, only a very few other places in Pascal-I
  have such code. Porting the program usually only requires
  defining null procedures for getseg and putseg and making
  eos return false. At one place, eos may need to be changed to
  eof.
  }
  getlfn(lfn); rename(textout, lfn); rewrite(textout);
  { get the file name and associate it with textout }
  saveblk(btymax - 1, true); reset(textout);
  { write the program to it and rewind it for next time }
end { timeoutsave };

procedure intproc(reasons: abortset);
{ No Pascal procedure in Pascal-I calls this routine.
  It is invoked by the 'reprieve' service routine which
  is invoked by the system montior when a time-out or
  user abort occurs.

  Incidentally, Pascal 6000 version 2 didn't have reentrant
  system routines. (The fault of using the RJ (return jump)
  to implement the calls.) Because this routine doesn't
  require any of the system routines to be accessed
  reentrantly, we can use a very simple version of the
  recovery routines in Pascal-I. Pascal-I is distributed
  with fully re-entrant recovery capabilities in its systems
  routines.
}
const
  abtmintime = 2.0; { minimum time limit allowed between
  user recoverable aborts ( 2 secs.)
  If less, then kill Pascal-I, cause
  he wants us dead.
}
  maxabtwocmd = 4; { maximum user aborts allowed between
  commands. If more then kill Pascal-I.
}

```

```

var
  now: real;

function rtime: real;
  extern { real time clock
           Returns time in seconds, accurate to milliseconds.
};

begin { intproc }
  timeout := timelimit in reasons;
  aborted := userabort in reasons;
  if aborted
  then
    begin
      abtcnt := abtcnt + 1; now := rtime;
      if now - lastabort < abtmintime
      then
        begin message('* multiple aborts. '); goto 13 { bag it }
        end
      else lastabort := now;
        end;
      writeln; ich := ' ';
      { clear and restart I/O }
      if abtcnt < maxabtwocmd then interrupt(intproc);
      { Set up for the next user abort or time-out }
    end { intproc };

begin { Pascal-I - - - Main Routine }
.
.
.
  { initialize the world }
.
lastcommand := badcommand; interrupt(intproc);
repeat { the command loop }
  if timeout then begin timeoutsave; command := enditall; end
  else
    begin
      { prompt for user command }
      writeln; writeln(' :'); { putseg(output); flush buffer }
      getln;
      if eos(input) then getseg(input); getch; getnb;
      { Another instance of that I/O mess.
      Note: The Pascal programs that are interpreted by
      Pascal-I run interactively (how else) and have
      none of this garbage.
      }
    }
  3: getcommand(command);
  1: case command of
    bottom: botcom;
    change: ccom(false);
    compilecom: compcom;
    continue: execom(true);
    .
    .
    . { there are about thirty more commands }
    .

```

```

        question: qmcom;
    end;
end;
.
. { command loop wrap-up stuff here }
.
    aborted := false;  abtcnt := 0;
    until command in [bye, enditall];
13: { terminate program on multiple aborts and fatal errors };
    if abend <> notfatal then printfatal(abend);
        message('!- End Pascal-I');
    end { Pascal-I }.

```

The entire supplemental system routines are presented here.
 Bill Cheswick coded these for CDC's NOS operating system.

```

    ident pi-aid
    syscom b1
    title pi-aid - Pascal-I helper routines.
    space 4,10

```

```

*** rename - change local file name.
*
* rename(ifet, name)

```

```

rename    entry  rename
          ps
          bx6   x1          new file name
          sa6   x0+13+1    efet + 1
          eq    rename     exit

```

```

interup  space 4,10
*** interup - set user-abort interupt address.
*
* interup(procaddr)

```

```

interup  entry  interup
          ps
          sx6   x0          get proc address
          sa6   inta
          distc on,int1,int
          eq    interup     exit

```

```

* entry on user abort.

```

```

int1     bss    20B
          sb1   1
          sa1   inta          get procedure address
          sb7   x1
          zr    x7,*+400000B  if no address to jump to
          sx6   b1          reason code = user abort
          jp    b7          exit to processor

inta     data   0          address of interupt procedure

```

```

*** space 4,10
*** rtime - get realtime since deadstart.
*
* x := rtime
*
* returns the time since deadstart as a real number, accurate
* to milliseconds.

rtime    entry  rtime
          ps
          rtime rtia
          sa1   rtia
          mx0   -36
          bx6   -x0*x1      millisecs
          px6
          nx6
          sa1   =0.001
          fx6   x6*x1
          nx6
          eq    rtime       exit

rtia     bss    1          rtime status word
          space 4,10
          end

```

Of all the complex functions described, getting the real time took the most code to implement. Implementing Pascal-I on IBM, DEC and other systems proved easy because of the simplicity and isolation of the system dependent interface.

```



1  program LISP(input, output);
2
3  {
4    The essence of a LISP Interpreter.
5    Written by W. Taylor and L. Cox
6    First date started : 10/29/76
7    Last date modified : 12/10/76
8  }
9
10 label
11  1, { used to recover after an error by the user }
12  2 { in case the end the file is reached before a fin card };
13
14 const
15  maxnode = 600;
16
17 type
18  inputsymbol =
19    (atom, period, lparen, rparen);
20  reservedwords =
21    (replacesym, replacetsym, headsym, tailsym, eqsym, quotesym,
22    atomsym, condsym, labelsym, lambdasym, copsym, appendsym, concsym,
23    conssym);
24  statustype =
25    (unmarked, left, right, marked);
26  symbexpptr = symbolicexpression;
27  alfa = array [1 .. 10] of char;
28  symbolicexpression = record
29    status: statustype;
30    next: symbexpptr;
31    case anatom: boolean of
32      true: (name: alfa;
33            case isarereservedword: boolean of
34              true: (ressym: reservedwords));
35            false: (head, tail: symbexpptr)
36          end;
37  {
38    Symbolicexpression is the record structure used
39    to implement a LISP list. This record has a tag
40    field 'anatom' which tells which kind of node
41    a particular node represents (i.e. an atom or
42    a pair of pointers 'head' and 'tail').
43    'Anatom' is always checked before accessing
44    either the name field or the head and tail
45    fields of a node. Two pages ahead there are
46    three diagrams which should clarify the data
47    structure.
48  }
49
50 {
51   The global variables
52 }
53 var
54 {
55   Variables which pass information from the scanner to the read
56   routine
57   lookaheadsym, { used to save a symbol when we back up }
58   sym: inputsymbol { the symbol that was last scanned };
59   id: alfa { name of the atom that was last read };
60   alreadypeeked: boolean { tells 'nextsym' whether we have peeked };
61   ch: char { the last character read from input };
62   ptr: symbexpptr { the pointer to the expression being evaluated };
63
64   { the global lists of LISP nodes }
65
66   freelist, { pointer to the linear list of free nodes }
67   nodelist, { pointer used to make a linear scan of all
68             the nodes during garbage collection }
69   alist: symbexpptr;
70
71   { two nodes which have constant values }
72   nilnode, tnode: symbolicexpression;
73
74   { variables used to identify atoms with pre-defined meanings }
75   resword: reservedwords;
76   reserved: boolean;
77   reswords: array [reservedwords] of alfa;
78   freenodes: integer { number of currently free nodes known };
79   numberofgc: integer { number of garbage collections made };
80
81 {
82 {
83 {
84 {
85 {
86 {
87   the atom 'a' is
88   represented by ---->
89
90
91
92 {
93 {
94 {
95 {
96 {
97 {
98 {
99 {
100 {
101   the dotted pair
102   '( a . b )' is
103   represented by ---->
104 {
105 {
106 {
107 {
108 {
109 {
110 {

```

```

111 {
112 {
113 {
114 {
115 {
116 {
117 {
118 {
119 {
120 {
121 {
122 {
123 {
124 {
125 {
126 {
127 {
128 {
129 {
130 {
131 {
132 {
133 {
134 {
135 {
136
137 {
138
139
140 procedure garbageman;
141 {
142   In general there are two approaches to maintaining lists of
143   available space in list processing systems... The reference
144   counter technique and the garbage collector technique.
145
146   The reference counter technique requires that for each node
147   or record we maintain a count of the number of nodes which
148   reference or point to it, and update this count continuously.
149   (i.e. with every manipulation.) In general, if circular or ring
150   structures are permitted to develop this technique will not be
151   able to reclaim rings which are no longer in use and have been
152   isolated from the active structure.
153
154   The alternative method, garbage collection, does not function
155   continuously, but is activated only when further storage is
156   required and none is available. The complete process consists
157   of two stages. A marking stage which identifies nodes still
158   reachable (in use) and a collection stage where all nodes in
159   the system are examined and those not in use are merged into
160   a list of available space. This is the technique we have chosen
161   to implement here for reasons of simplicity and to enhance the
162   interactive nature of our system.
163
164   The marking stage is theoretically simple, especially in LISP
165   programming systems where all records are essentially the same
166   size. All that is required is a traversal of the active list
167   structures. The most obvious marking system consists of a procedure
168   which makes a number of successive passes through the data
169   structure, each time marking nodes 1 level deeper into the tree
170   on each pass. This is both crude and inefficient.
171
172   Another alternative procedure which could be used would use a
173   recursive walk of the tree structure to mark the nodes in use.
174   This requires the use of a stack to store back pointers to
175   branches not taken. This algorithm is efficient, but tends to
176   be self defeating in the following manner. The requisite stack could
177   become quite large (requiring significant amounts of storage).
178   However, the reason we are performing garbage collection in the
179   first place is due to an insufficiency of storage space. Therefore
180   an undesirable situation is likely to arise where the garbage
181   collector's stack cannot expand to perform the marking pass.
182   Even though there are significant amounts of free space waiting
183   to be reclaimed.
184
185   A solution to this dilemma came when it was realized that space
186   in the nodes themselves (i.e. the left and right pointers) could
187   be used in lieu of the explicit stack. In this way the stack
188   information can be embedded into the list itself as it is traversed.
189   This algorithm has been discussed in Knuth and in Berztiss: Data
190   Structures, Theory and Practice (2nd ed.), and is implemented below.
191
192   Since Pascal does not allow structures to be addressed both with
193   pointers and as indexed arrays, an additional field has been added
194   to sequentially link the nodes. This pointer field is set on initial
195   creation, and remains invariant throughout the run. Using this field,
196   we can simulate a linear pass through the nodes for the collection
197   stage. Of course, a marker field is also required.
198
199
200
201 procedure mark(list: symbexpptr);
202
203 var
204   father, son, current: symbexpptr;
205
206 begin
207   father := nil; current := list; son := current;
208   while current <> nil do
209     with current do
210       case status of
211         unmarked:
212           if anatom then status := marked
213           else
214             if (head.status <> unmarked) or (head = current)
215             then
216               if (tail.status <> unmarked) or (tail = current)
217               then status := marked
218             else
219               begin
220                 status := right; son := tail; tail := father;

```

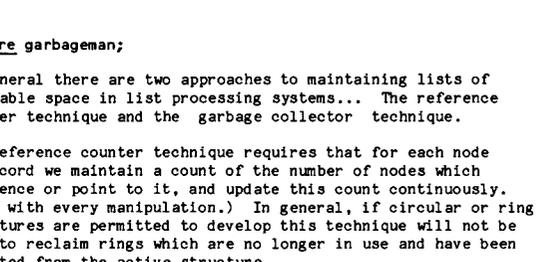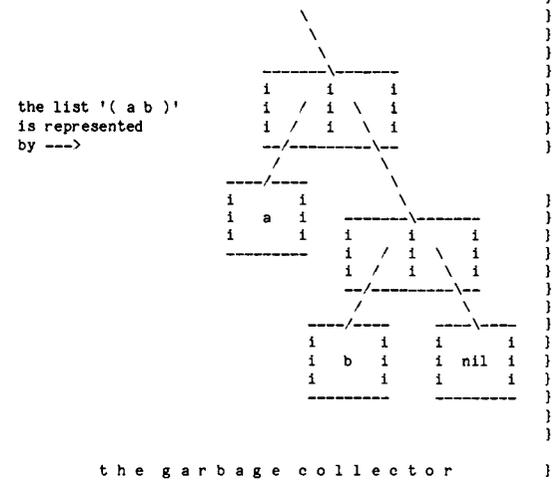

```

221         father := current; current := son
222     end
223 else
224     begin
225         status := left; son := head; head := father;
226         father := current; current := son
227     end;
228 Left:
229     if tail^.status <> unmarked
230     then
231         begin
232             status := marked; father := head; head := son;
233             son := current
234         end
235     else
236     begin
237         status := right; current := tail; tail := head;
238         head := son; son := current
239     end;
240 Right:
241     begin
242         status := marked; father := tail; tail := son;
243         son := current
244     end;
245     marked: current := father
246     end { case }
247 end { mark };
248
249
250 procedure collectfreenodes;
251
252 var
253     temp: symbexpPtr;
254
255 begin
256     writeln(' number of free nodes before collection = ', freenodes: 1
257     , '.');
258     freelist := nil; freenodes := 0; temp := nodelist;
259     while temp <> nil do
260     begin
261         if temp^.status <> unmarked then temp^.status := unmarked
262         else
263             begin
264                 freenodes := freenodes + 1; temp^.head := freelist;
265                 freelist := temp
266             end;
267             temp := temp^.next
268         end;
269     writeln(' number of free nodes after collection = ', freenodes: 1
270     , '.');
271     end { collectfreenodes };
272
273
274 begin { garbageman }
275     numberofgcs := numberofgcs + 1; writeln;
276     writeln(' garbage collection. '); writeln; mark(alist);
277     if ptr <> nil then mark(ptr); collectfreenodes
278     end { garbageman };
279
280
281 procedure pop(var sptr: symbexpPtr);
282
283 begin
284     if freelist = nil then
285     begin
286         writeln(' not enough space to evaluate the expression. ');
287         { goto 2 }
288     end;
289     freenodes := freenodes - 1; sptr := freelist;
290     freelist := freelist^.head
291 end { pop };
292
293
294 { input / output utility routines }
295
296
297 procedure error(number: integer);
298
299 begin
300     writeln; write(' Error ', number: 1, ', ');
301     case number of
302         1: writeln(' atom or lparen expected in the s-expr. ');
303         2: writeln(' atom, lparen, or rparen expected in the s-expr. ');
304         3: writeln(' label and lambda are not names of functions. ');
305         4: writeln(' rparen expected in the s-expr. ');
306         5: writeln(' 1st argument of replace is an atom. ');
307         6: writeln(' 1st argument of replacet is an atom. ');
308         7: writeln(' argument of head is an atom. ');
309         8: writeln(' argument of tail is an atom. ');
310         9: writeln(' 1st argument of append is not a list. ');
311         10: writeln(' comma or rparen expected in concatenate. ');
312         11: writeln(' end of file encountered before a "fin" card. ');
313         12: writeln(' lambda or label expected. ');
314     end { case };
315     if number in [11] then goto 2
316     else goto 1
317 end { error };
318
319
320 Procedure backupinput puts a left parenthesis
321 into the stream of input symbols. This makes
322 procedure readexpr easier than it otherwise
323 would be.
324 }
325
326
327 procedure backupinput;
328
329 begin alreadypeeked := true; lookaheads := sym; sym := lparen
330 end { backupinput };

```

```

331
332
333 Procedure nextsym reads the next symbol from
334 the input file. A symbol is defined by the
335 global type 'inputsymbol'. The global variable
336 'sym' returns the type of the next symbol read.
337 The global variable 'id' returns the name of an
338 atom if the symbol is an atom. If the symbol is
339 a reserved word the global variable 'reserved'
340 is set to true and the global variable 'resword'
341 tells which reserved word was read.
342
343
344
345 procedure nextsym;
346
347 var
348     i: integer;
349
350 begin
351     if alreadypeeked
352     then begin sym := lookaheads; alreadypeeked := false end
353     else
354     begin
355         while ch = ' ' do
356             begin if eoln(input) then writeln; read(ch); write(ch);
357             end;
358             if ch in ['(', '.', ')']
359             then
360                 begin
361                     case ch of
362                         '(': sym := lparen;
363                         '.': sym := period;
364                         ')': sym := rparen
365                     end { case };
366                     if eoln(input) then writeln; read(ch); write(ch)
367                     end
368                 else
369                 begin
370                     sym := atom; id := ' '; i := 0;
371                     repeat
372                         i := i + 1; if i < 11 then id[i] := ch;
373                         if eoln(input) then writeln; read(ch); write(ch)
374                         until ch in ['(', '.', ')'];
375                         resword := replacehsym;
376                         while (id <> reswords[resword]) and (resword <> consys) do
377                             resword := succ(resword);
378                             reserved := id = reswords[resword]
379                         end
380                     end
381                 end { nextsym };
382
383
384 procedure readexpr(var sptr: symbexpPtr);
385
386 This procedure recursively reads in the next symbolic expression
387 from the input file. When this procedure is called the global
388 variable 'sym' must be the first symbol in the symbolic expression
389 to be read. A pointer to the symbolic expression read is returned
390 via the variable parameter sptr.
391 Expressions are read and stored in the appropriate structure
392 using the following grammar for symbolic expressions :
393
394 <s-expr> ::= <atom>
395           or ( <s-expr> . <s-expr> )
396           or ( <s-expr> <s-expr> ... <s-expr> )
397
398 Where ... means an arbitrary number of. (i.e. zero or more.)
399 To parse using the third rule, the identity
400 (a b c ... z) = (a . (b c ... z))
401 is utilized. An extra left parenthesis is inserted into
402 the input stream as if it occurred after the imaginary dot.
403 When it comes time to read the imaginary matching
404 right parenthesis it is just not read (because it is not there).
405 }
406
407 var
408     nst: symbexpPtr;
409
410 begin
411     pop(sptr); nst := sptr^.next;
412     case sym of
413         rparen, period: error(1);
414         atom:
415             with sptr^ do
416                 begin { <atom> }
417                     anatom := true; name := id; isareservedword := reserved;
418                     if reserved then ressym := resword
419                     end;
420             lparen:
421                 with sptr^ do
422                     begin
423                         nextsym;
424                         if sym = period then error(2)
425                         else
426                             if sym = rparen then sptr^ := nilnode { () = nil }
427                             else
428                                 begin
429                                     anatom := false; readexpr(head); nextsym;
430                                     if sym = period
431                                     then
432                                         begin { <<s-expr> . <s-expr> }
433                                             nextsym; readexpr(tail); nextsym;
434                                             if sym <> rparen then error(4)
435                                         end
436                                     else
437                                         begin { ( <s-expr> <s-expr> ... <s-expr> ) }
438                                             backupinput; readexpr(tail)
439                                         end
440                                     end

```

```

441     end { with }
442   end { case };
443   sprtr^.next := nxt
444   end { readexpr };
445
446
447 procedure printname(name: alfa);
448 {
449   Procedure printname prints the name of
450   an atom with one trailing blank.
451 }
452
453 var
454   i: integer;
455
456 begin
457   i := 1;
458   repeat write(name[i]); i := i + 1
459   until (name[i] = ' ') or (i = 11);
460   write(' ');
461 end { printname };
462
463
464 procedure printexpr(sptr: symbexpptr);
465 {
466   The algorithm for this procedure was provided by
467   Weissman's LISP 1.5 Primer, p.125. This
468   procedure prints the symbolic expression pointed
469   to by the argument 'sprtr' in the lisp list
470   notation. (The same notation in which expressions
471   are read.)
472 }
473
474 label
475   i;
476
477 begin
478   if sprtr^.anatom then printname(sptr^.name)
479   else
480     begin
481       write('(');
482       i: with sprtr^ do
483         begin
484           printexpr(head);
485           if tail^.anatom and (tail^.name = 'NIL')
486             then write(')')
487           else
488             if tail^.anatom
489             then
490               begin write(' '); printexpr(tail); write(')') end
491             else begin sprtr := tail; goto 1 end
492           end
493         end
494       end { printexpr };
495 {
496   end of i / o utility routines }
497
498 {
499   The Expression Evaluator Eval }
500
501 function eval(e, alist: symbexpptr): symbexpptr;
502 {
503   Function eval evaluates the LISP expression 'e' using the
504   association list 'alist'. This function uses the following
505   several local functions to do so. The algorithm is a
506   Pascal version of the classical LISP problem of writing
507   the LISP eval routine in pure LISP. The LISP version of
508   the code is as follows:
509
510   (lambda (e alist)
511     cond
512       ((atom e) (lookup e alist))
513       ((atom (car e))
514        (cond ((eq (car e) (quote quote))
515              (cadr e))
516              ((eq (car e) (quote atom))
517               (atom (eval (cadr e) alist))
518              ((eq (car e) (quote eq))
519               (eq (eval (cadr e) alist)))
520              ((eq (car e) (quote car))
521               (car (eval (cadr e) alist)))
522              ((eq (car e) (quote cdr))
523               (cdr (eval (cadr e) alist)))
524              ((eq (car e) (quote cons))
525               (cons (eval (cadr e) alist)
526                     (eval (caddr e) alist))
527              ((eq (car e) (quote cond))
528               ((eq (car e) (quote cond))
529                (evcon (cdr e)))
530              (t (eval (cons (lookup (car e) alist)
531                            (cdr e) alist)))
532              ((eq (caar e) (quote label))
533               (eval (cons (caddr e)
534                           (cdr e)
535                           (cons (cons (caddr e) (car e))
536                                 alist))))
537              ((eq (caar e) (quote lambda))
538               (eval (caddr e)
539                     (bindargs (caddr e) (cdr e))))))
540
541   The resulting Pascal code follows:
542 }
543
544 var
545   temp, carofe, caarofe: symbexpptr;
546 {
547   The first ten of the following local functions implement
548   ten of the primitives which operate on the LISP data
549   structure. The last three local functions, 'lookup',
550   'bindargs' and 'evcon', are used by 'eval' to interpret
551   a LISP expression.
552 }
553
554 function replaceh(sptr1, sprtr2: symbexpptr): symbexpptr;
555
556 begin
557   if sprtr1^.anatom then error(5) else sprtr1^.head := sprtr2;
558   replaceh := sprtr1
559   end { replaceh };
560
561
562 function replacet(sptr1, sprtr2: symbexpptr): symbexpptr;
563
564 begin
565   if sprtr1^.anatom then error(6) else sprtr1^.tail := sprtr2;
566   replacet := sprtr1
567   end { replacet };
568
569
570 function head(sptr: symbexpptr): symbexpptr;
571
572 begin if sprtr^.anatom then error(7) else head := sprtr^.head
573   end { head };
574
575
576 function tail(sptr: symbexpptr): symbexpptr;
577
578 begin if sprtr^.anatom then error(8) else tail := sprtr^.tail
579   end { tail };
580
581
582 function cons(sptr1, sprtr2: symbexpptr): symbexpptr;
583
584 var
585   temp: symbexpptr;
586
587 begin
588   pop(temp); temp^.anatom := false; temp^.head := sprtr1;
589   temp^.tail := sprtr2; cons := temp
590   end { cons };
591
592
593 function copy(sptr: symbexpptr): symbexpptr;
594 {
595   This function creates a copy of the structure
596   pointed to by the parameter 'sprtr'
597 }
598
599 var
600   temp, nxt: symbexpptr;
601
602 begin
603   if sprtr^.anatom
604   then
605     begin
606       pop(temp); nxt := temp^.next; temp := sprtr;
607       temp^.next := nxt; copy := temp
608     end
609   else copy := cons(copy(sptr^.head), copy(sptr^.tail))
610   end { copy };
611
612
613 function append(sptr1, sprtr2: symbexpptr): symbexpptr;
614 {
615   The recursive algorithm is from Weissman, p.97.
616 }
617
618 begin
619   if sprtr1^.anatom
620   then
621     if sprtr1^.name <> 'NIL' then error(9)
622     else append := sprtr2
623   else
624     append := cons(copy(sptr1^.head), append(sptr1^.tail, sprtr2))
625   end { append };
626
627
628 function conc(sptr1: symbexpptr): symbexpptr;
629 {
630   This function serves as the basic concatenation mechanism
631   for variable numbers of list expressions in the input stream.
632   The concatenation is handled recursively, using the identity:
633   conc(a,b,c,d) = cons(a,cons(b,cons(c,cons(d,nil))))
634
635   The routine is called when a conc(... command has been
636   recognized on input, and its single argument is the first
637   expression in the chain. It has the side effect of reading
638   all following input up to the parenthesis closing the
639   conc command.
640
641   The procedure consists of the following steps-
642   1. call with 1st expression as argument.
643   2. read the next expression.
644   3. if the expression just read was not the last, recurse.
645   4. otherwise... unwind.
646 }
647
648 var
649   sprtr2, nilptr: symbexpptr;
650
651 begin
652   if sym <> rparen
653   then
654     begin
655       nextsym; readexpr(sptr2); nextsym;
656       conc := cons(sptr1, conc(sptr2));
657     end
658   else
659     if sym = rparen


```

```

661     then
662     begin
663         new(nilptr);
664         with nilptr do
665             begin anatom := true; name := 'NIL ' end;
666             conc := cons(sptr1, nilptr);
667         end
668     else error(10)
669 end { conc };
670
671
672 function eqq(sptr1, sptr2: symbexptr): symbexptr;
673
674 var
675     temp, nxt: symbexptr;
676
677 begin
678     pop(temp); nxt := temp^.next;
679     if sptr1^.anatom and sptr2^.anatom
680     then
681         if sptr1^.name = sptr2^.name then temp := tnode
682         else temp := nilnode
683         else
684             if sptr1 = sptr2 then temp := tnode
685             else temp := nilnode;
686             temp^.next := nxt; eqq := temp
687         end { eqq };
688
689 function atom(sptr: symbexptr): symbexptr;
690
691 var
692     temp, nxt: symbexptr;
693
694 begin
695     pop(temp); nxt := temp^.next;
696     if sptr^.anatom then temp := tnode else temp := nilnode;
697     temp^.next := nxt; atom := temp
698 end { atom };
699
700
701 function lookup(key, alist: symbexptr): symbexptr;
702
703 var
704     temp: symbexptr;
705
706 begin
707     temp := eqq(head(head(alist)), key);
708     if temp^.name = 'T ' then lookup := tail(head(alist))
709     else lookup := lookup(key, tail(alist))
710 end { lookup };
711
712
713 function bindargs(names, values: symbexptr): symbexptr;
714
715 var
716     temp, temp2: symbexptr;
717
718 begin
719     if names^.anatom and (names^.name = 'NIL ')
720     then bindargs := alist
721     else
722         begin
723             temp := cons(head(names), eval(head(values), alist));
724             temp2 := bindargs(tail(names), tail(values));
725             bindargs := cons(temp, temp2)
726         end
727     end { bindargs };
728
729
730 function evcon(condpairs: symbexptr): symbexptr;
731
732 var
733     temp: symbexptr;
734
735 begin
736     temp := eval(head(head(condpairs)), alist);
737     if temp^.anatom and (temp^.name = 'NIL ')
738     then evcon := evcon(tail(condpairs))
739     else evcon := eval(head(tail(head(condpairs))), alist)
740 end { evcon };
741
742
743 begin { eval }
744 if e^.anatom then eval := lookup(e, alist)
745 else
746     begin
747         carofe := head(e);
748         if carofe^.anatom
749         then
750             if not carofe^.isareservedword
751             then
752                 eval := eval(cons(lookup(carofe, alist), tail(e)), alist)
753             else
754                 case carofe^.ressym of
755                     labelsym, lambdasym: error(3);
756                     quotesym: eval := head(tail(e));
757                     atomsym: eval := atom(eval(head(tail(e)), alist));
758                     eqsym:
759                         eval := eqq(eval(head(tail(e)), alist), eval(head(tail(
760                             tail(e))), alist));
761                     headsym: eval := head(eval(head(tail(e)), alist));
762                     tailsym: eval := tail(eval(head(tail(e)), alist));
763                     consym:
764                         eval := cons(eval(head(tail(e)), alist), eval(head(tail(
765                             tail(e))), alist));
766                     condsym: eval := evcon(tail(e));
767                     concsym;
768                     appendsym:
769                         eval := append(eval(head(tail(e)), alist), eval(head(
770
771         tail(tail(e))), alist));
772     replacsym:
773         eval := replace(eval(head(tail(e)), alist), eval(head(
774         tail(tail(e))), alist));
775     replacetsym:
776         eval := replacet(eval(head(tail(e)), alist), eval(head(
777         tail(tail(e))), alist))
778     end { case }
779 else
780     begin
781         caarofe := head(carofe);
782         if caarofe^.anatom and caarofe^.isareservedword
783         then
784             if not (caarofe^.ressym in [labelsym, lambdasym])
785             then error(12)
786             else
787                 case caarofe^.ressym of
788                     labelsym:
789                         begin
790                             temp := cons(cons(head(tail(carofe)), head(tail(
791                                 tail(carofe))), alist);
792                             eval := eval(cons(head(tail(carofe))), tail(e
793                                 )), temp)
794                         end;
795                     lambdasym:
796                         begin
797                             temp := bindargs(head(tail(carofe)), tail(e));
798                             eval := eval(head(tail(tail(carofe))), temp)
799                         end
800                 end { case }
801             else
802                 eval := eval(cons(eval(carofe, alist), tail(e)), alist)
803             end
804         end { eval };
805     end { eval };
806
807 procedure initialize;
808
809 var
810     i: integer;
811     temp, nxt: symbexptr;
812
813 begin
814     alreadypeeked := false; read(ch); write(ch); numberofgs := 0;
815     freenodes := maxnode;
816     with nilnode do
817         begin
818             anatom := true; next := nil; name := 'NIL ';
819             status := unmarked; isareservedword := false
820         end;
821     with tnode do
822         begin
823             anatom := true; next := nil; name := 'T ';
824             status := unmarked; isareservedword := false
825         end;
826     end;
827
828     { - - - allocate storage and mark it free }
829     freelist := nil;
830     for i := 1 to maxnode do
831         begin
832             new(nodelist); nodelist^.next := freelist;
833             nodelist^.head := freelist; nodelist^.status := unmarked;
834             freelist := nodelist
835         end;
836
837     { - - - initialize reserved word table }
838     reswords[replacsym] := 'REPLACEH ';
839     reswords[replacetsym] := 'REPLACET ';
840     reswords[headsym] := 'CAR ';
841     reswords[tailsym] := 'CDR ';
842     reswords[copysym] := 'COPY ';
843     reswords[appendsym] := 'APPEND ';
844     reswords[concsym] := 'CONC ';
845     reswords[conssym] := 'CONS ';
846     reswords[eqsym] := 'EQ ';
847     reswords[quotesym] := 'QUOTE ';
848     reswords[atomsym] := 'ATOM ';
849     reswords[condsym] := 'COND ';
850     reswords[labelsym] := 'LABEL ';
851     reswords[lambdasym] := 'LAMBDA ';
852
853     { - - - initialize the a-list with t and nil }
854     pop(alist); alist^.anatom := false; alist^.status := unmarked;
855     pop(alist^.tail); nxt := alist^.tail^.next;
856     alist^.tail := nilnode; alist^.tail^.next := nxt;
857     pop(alist^.head);
858
859     { - - - bind nil to the atom nil }
860     with alist^.head do
861         begin
862             anatom := false; status := unmarked; pop(head);
863             nxt := head^.next; head := nilnode; head^.next := nxt;
864             pop(tail); nxt := tail^.next; tail := nilnode;
865             tail^.next := nxt
866         end;
867     pop(temp); temp^.anatom := false; temp^.status := unmarked;
868     temp^.tail := alist; alist := temp; pop(alist^.head);
869
870     { - - - bind t to the atom t }
871     with alist^.head do
872         begin
873             anatom := false; status := unmarked; pop(head);
874             nxt := head^.next; head := tnode; head^.next := nxt;
875             pop(tail); nxt := tail^.next; tail := tnode;
876             tail^.next := nxt
877         end;
878     end { initialize };
879
880

```

```
881 begin { LISP }
882   writeln(' * EVAL * '); initialize; nextsym; readexpr(ptr);
883   readln; writeln;
884   while not ptr^.anatom or (ptr^.name <> 'FIN      ') do
885     begin
886       writeln; writeln(' * value * '); printexpr(eval(ptr, alist));
887       1: writeln; writeln; if eof(input) then error(11);
888       ptr := nil;
889       { call the } garbageman; writeln; writeln;
890       writeln(' * EVAL * '); nextsym; readexpr(ptr); readln;
891       writeln;
892     end;
893   2: writeln; writeln;
894     writeln(' total number of garbage collections = ', numberofgcs: 1, '.');
895     );
896     writeln;
897     writeln(' free nodes left upon exit = ', freenodes: 1, '.');
898     writeln;
899 end { LISP }.
```

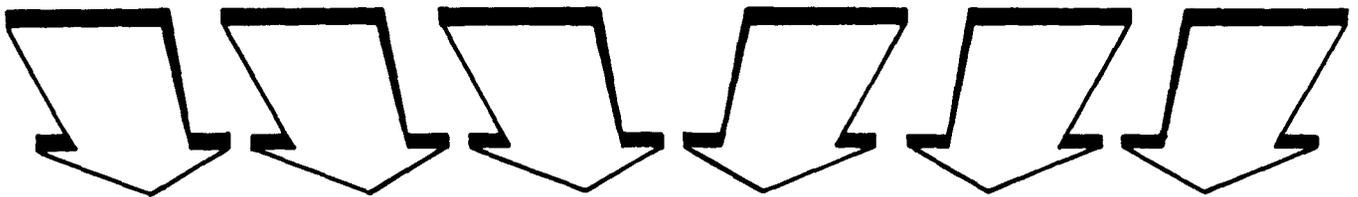

Articles

An Implementation of New and Dispose
using Boundary Tags

Branko J. Gerovac

The standard Pascal procedures New and Dispose are implemented using boundary-tag memory management. This implementation replaces the original New and Dispose module in the run-time library of Oregon Minicomputer Software, Inc. Pascal-1 which executes on Digital Equipment Corp. PDP-11 computers. Design details, although aimed at this configuration, should be generally useful. Performance of the original and boundary-tag implementations are analyzed and compared.

Key words: Pascal, New and Dispose, memory management, boundary tag.

1. Introduction

Many Pascal systems do not fully implement New and Dispose. One can speculate that (1) the full generality of New and Dispose was deemed unnecessary or undesirable, or that (2) efficient algorithms for New and Dispose are not readily available. This paper addresses the latter issue.

The standard Pascal run-time environment has two functionally different data storage areas: the stack and the heap.

The number of accessible data items on the stack is designated by the declarations of a program, and all operations that allocate and release stack storage and access stack data are implicit in program syntax. In addition, the block structure of a program designates the period (lifetime) during which stack storage is set aside.

In contrast, the number and lifetime of items on the heap are largely independent of program declarations, and heap operations are programmed explicitly. At run time, a program must (1) maintain access to heap data, by using pointers, and (2) allocate and release heap storage, by using New and Dispose.

Some Pascal systems implement the heap as a second stack (e.g., P-code Pascal [NAJNJ76]). A second stack requires that a program maintain the information necessary to release heap storage, and that heap storage is released in the reverse order from which it was allocated. This restriction may prevent the programmer from implementing algorithms that use a non-stack-like data structure [cf., HS76, HS78, W76].

Here, a boundary-tag scheme for managing free blocks permits an efficient implementation of New and Dispose. This module has many advantages over the original New and Dispose module in the run-time library of OMSI-Pascal-1 [1]. OMSI-Pascal's original New and Dispose provided some insight into the problems of heap management. With the original module, examples of wide variation in memory efficiency and execution time are apparent. Since one of OMSI-Pascal's strong features is its applicability to real-time programming, many design decisions for the boundary-tag module were aimed at decreasing execution time. Memory efficiency improved also.

Performance analyses of each New and Dispose module are compared. Analyses of specific heap operations were carried out by calculating run times of each implementation. Simulation tests were run to obtain comparative performance during

Author's address: Behavioral Sciences Department, Eunice Kennedy Shriver Center for Mental Retardation, 200 Trapelo Road, Waltham, Massachusetts 02154; Phone: (617)893-3500.

[1] Oregon Minicomputer Software, Inc. distributes and maintains the Pascal system that was implemented by Electro Scientific Industries. An earlier version of OMSI-Pascal-1 was known as ESI-Pascal. This Pascal was one of the first to implement Dispose. OMSI-Pascal runs on Digital Equipment Corp. PDP-11 computers and uses standard operating system facilities.

actual execution.

Although a specific hardware-software environment is discussed here, the design rationale would be appropriate for other systems. Pascal sources for each implementation of New and Dispose and assembly language sources for the boundary-tag module are provided to promote general use.

2. Description of the Original New and Dispose Module

The run-time memory configuration of OMSI-Pascal-1 [ESI77], under DEC's RT-11 real-time operating system, is typical for block structured languages [NAJNJ76, AU77]. The operating system maintains areas of memory for interrupt vectors, system communication, the resident monitor and peripheral device registers [DEC78]. When a Pascal program is run, the program code is loaded into low memory, and then a Pascal run-time library routine initializes the data areas. The heap is located in low memory just above the program code and global storage, and the stack is located in high memory. The heap grows upward and the stack grows downward; the unused memory between the heap and the stack is available for expansion of either. No automatic memory-disk swapping of data occurs.

Two pointers are maintained by New and Dispose to manage heap memory: (1) \$KORE points to the beginning of the unused area above the heap, and (2) \$FREE points to a list of free blocks in the heap. The free list is a singly linked list of blocks that have been disposed [2]. Each free block contains (1) a pointer to the next block in the list (a nil pointer if it is the last block in the list) and (2) the block's size. An advantage of the free list is that the information needed to manage a free block is contained within the block, thus no additional memory overhead is required for free-block management. (Computers with virtual memory may benefit from a separate table of free blocks to avoid excessive memory-disk swapping.)


New. To allocate storage on the heap, program code passes the size needed to New [3]. (Appendix A contains Pascal sources of New and Dispose.) If one word is requested, it is allocated by extending the top of the heap by one word; one-word blocks do not fit on the free list because two words are necessary to contain pointer and size information. For a request of more than one word, the free list is searched for a block of the exact size (exact-fit) of the block requested. If such a block is found, it is unlinked from the list and allocated; if no such block is found or the free list is empty, the heap is extended by the number of words needed to allocate the block. If collision with the stack results from extending the heap, program execution is terminated. The newly allocated block is zeroed to provide a clean slate and to help prevent inadvertent violation of the free list. New returns the address of the new block, and program code assigns this address to a pointer.

Dispose. To release storage to the heap, program code passes the address and the size of the block to Dispose. A block that is larger than one word is linked to the

[2] Since New and Dispose may be called in any sequence, the heap can contain a mix of allocated and free blocks. The free list permits New to reuse free blocks.

[3] The size is always an even number of bytes due to the PDP-11's restriction that word based data, e.g., integers, be stored at even byte (word) locations.

Diagram of Memory Layout:

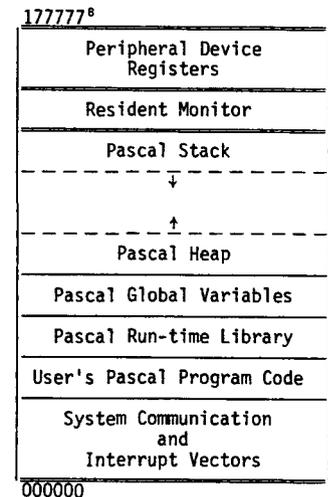

beginning of the free list and its size is recorded; a one-word block effectively is not released. Then, the free list is searched for a block adjacent to the top of the heap. If a block is found, it is released from the heap by unlinking it from the free list and decrementing \$KORE. This search is repeated until a full scan of the list is made without a decrease in the upper bound of the heap.

The original implementation of New and Dispose is uncomplicated, requires little code, and seems as though it would work well with typical Pascal programs. Generally, only a few different data sizes are specified in a program. The exact-fit allocation scheme often finds the size block needed in the free list; the size of the last disposed block is likely to be the same as the size of the next requested block, hence, placement of the disposed block at the beginning of the free list may speed allocation. However, problems arise when worst-case memory-space and execution-time performance are considered.

For example, since the free list does not keep track of disposed one-word blocks, one-word blocks limit the extent to which the upper bound of the heap can be reduced. Free blocks that are below a one-word block will never be adjacent to the top of the heap and cannot be released. Even so, Dispose continues to scan these free blocks. A simple solution would allocate two words for a one-word request so that the block would fit on the free list.


Another problem, easily fixed, is the unnecessary search that Dispose makes when a block is first linked to the free list. The free list need be searched only if the block currently being disposed is adjacent to the top of the heap.

Even with these changes, certain configurations of the free list generate inefficient memory use and a wide range of execution times.

Consider a program that places 100 blocks of one size in the free list. Suppose the program then requests a block of some different size. Since New employs an exact-fit algorithm, a search of the free list will not produce a block of the correct size and the heap will be extended for the new block. Effectively, 100 blocks of storage are not usable, the total size of the heap is larger than necessary, and the execution time of New has increased by the amount of time required to search 100 blocks.

Now consider that the 100 blocks were disposed in the reverse order from which they were allocated (last allocated, first freed). In other words, the blocks nearer the top of the heap are farther from the beginning of the free list. When the final block (keystone) between the top of the heap and the 100 blocks on the free list is disposed, a chain reaction releases all 100 blocks from the heap. However, the full depth of the free list must be scanned for each block to be released. This results in

Diagram of Heap, original module:

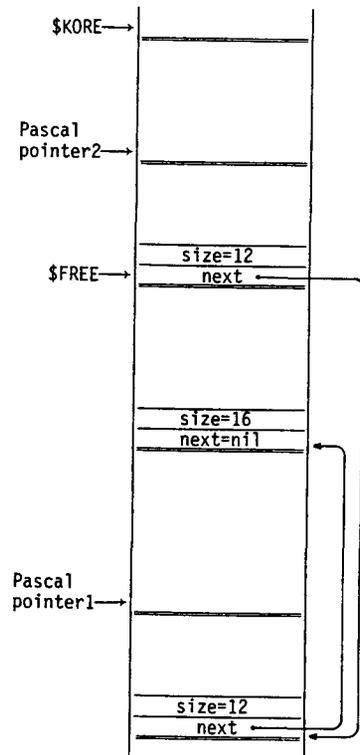

a single call of Dispose that performs 5,050 comparisons, i.e., a complexity of $O[\text{Sqr}(N)/2]$.

3. Selection and Design of a Heap Management Algorithm


In both cases described above, the large number of free blocks causes worst-case performance. This number can be reduced by merging adjacent free blocks. The resulting larger block would be available for allocation when its constituent blocks would have been too small. By allocating a portion of a large block and returning the remainder to the free list, the larger block is available for a variety of smaller size allocations. Thus, reusability of available memory is enhanced.

Since the heap grows toward the stack, the upper extent of the heap should be kept as low as possible. To accomplish this, blocks in the free list can be ordered by memory location; blocks which are nearer the bottom of the heap are placed closer to the beginning of the list. New, employing a first-fit search algorithm, allocates the lowest free block of sufficient size. If the block exceeds the requested size, only the lower portion is allocated, and the remainder is returned to the free list. Biasing heap allocations toward lower memory helps avoid collision with the stack.

Dispose, then, maintains the ordered free list, and merges adjacent free blocks. Simply, when a block is disposed, a comparison with blocks already in the free list would determine whether to merge the disposed block with a free block or to insert the disposed block into the free list; potentially, a full scan of the free list would be needed. However, literature on memory-allocation strategies [K73, S74, G76, H76, HS76] indicates that a dispose operation can be performed without scanning the free list by employing Knuth's "Boundary Tag" scheme for free-block management [K73]. The implementation presented here differs from Knuth's presentation in order to maintain the ordered free list.

The boundary-tag scheme uses two additional words of storage to mark the boundaries of each block; lower and upper boundary words are identical. Each boundary word contains the size of the block and a one-bit tag that signifies whether the block is allocated or free. Since the size is always an even number of bytes, bit zero can be used to tag the block. Bit zero is clear to indicate that the block is free and is set to indicate that the block is allocated. Dispose need check only the boundary

Diagram of a Heap, boundary-tag module:

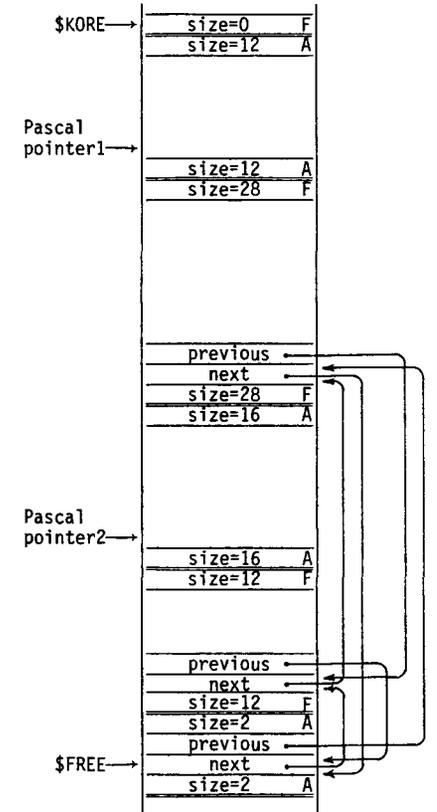

words of the blocks adjacent to the block being disposed to determine whether a merge can be performed.

Each free block contains two pointers which enable access to the next and previous free blocks during insert and merge operations. Placement and referencing of the pointers was chosen to facilitate access using the auto-increment/auto-decrement addressing modes of the PDP-11 instruction set. Also, placement at the bottom of the block corresponds to Pascal pointer referencing. (Although, placement of the pointers at the top of the block would seem advantageous when the lower portion is allocated, preliminary coding indicated a marked increase in code size and a very slight decrease in execution time.)

The heap is initialized with boundary blocks at the bottom and top of the heap. \$FREE points to the lower boundary block, which is tagged as being allocated, and links the bottom and top of the free list into a circular list; the list can be traversed in either direction. \$KORE points to the upper boundary block, which is tagged as free and has a size of zero. This is a pseudo block in that it is not linked into the free list; it serves only to provide a boundary word to check when the block adjacent to \$KORE is being disposed. The boundary blocks eliminate the need for tests which otherwise would have to check boundary conditions during insertion on and removal from the free list. Without boundary blocks, Dispose would have required as many as 8 conditional tests to select from 12 separate operations. With the boundary blocks, only 4 tests and 6 operations are needed.

4. Description of the Boundary-Tag New and Dispose Module

The boundary-tag module was written so that no changes to the compiler or the rest of the run-time library would be needed (see Appendix Notes).

New. To allocate storage on the heap, program code passes the size of the block to **New**. (Appendix B contains Pascal sources of **New** and **Dispose**, and Appendix D, Macro-11 sources.) A request for one word is changed to two words. The free list is searched starting at the bottom. If a large enough block is not found, then the heap is extended, providing that the heap does not collide with the stack. If a block which is larger than needed is found, the lower portion is allocated and the upper portion (remainder) is returned to the free list. However, if the remainder would be too small to fit in the free list, the entire block is allocated. Then, the tags of the new block are set, the block is zeroed, and its address returned.

Dispose. To release storage to the heap, program code passes the address and the size of the block to **Dispose**; the size parameter is ignored since the actual size of the block is contained in the boundary word. The block's tag is checked to see that it is allocated and the block's address is checked to see that it is within the heap (QMSI-Pascal has been extended to permit pointers to data which are not stored on the heap). Then its tags are set to free, and the addresses of the lower- and upper-adjacent words are calculated. If the lower-adjacent block is free, the two blocks are merged; a merge with a lower-adjacent block is rapid, since the next and previous links are not changed. If the upper-adjacent word is the top of the heap (\$KORE) the block is released from the heap. If the upper-adjacent block is free, the blocks are merged and the links are adjusted; link adjustment depends on whether a merge with the lower-adjacent block had occurred. If neither adjacent block is free, the free list is scanned to compare the address of the block being disposed with the addresses of blocks in the free list. The disposed block is inserted in proper order, maintaining the ordered free list.

Problems in the original module have been corrected. One-word requests return a two-word block that will fit in the free list without special handling. Allocations are made from the lowest possible free block; the upper free blocks are more likely to be released from the heap. Free blocks are merged; the larger blocks are available for a variety of allocation sizes, and the shorter free list is more rapidly scanned. Boundary tags permit most blocks to be disposed without a scan through the free list.

5. Static Analysis

The additional operations of the boundary-tag module require more than twice the instruction space of the original. The number of storage words for each procedure is:

| | original | boundary tag |
|---------|----------|--------------|
| New | 38 | 103 |
| Dispose | 33 | 78 |

Execution-time equations for both **New** and **Dispose** modules were calculated using the instruction execution times given by the manufacturer for an LSI-11 with a 350 nanosecond microcycle time [DEC77]. Representative data, based on simulation tests (N=4, random) presented in the next section, are shown in brackets; all execution times are in microseconds (us). Subsequent references to the original implementation of **New** and **Dispose** and the boundary-tag implementation of **New** and **Dispose** are indicated respectively by **New-org**, **Dispose-org**, **New-tag** and **Dispose-tag**.

New-org performs three likely forms of allocation: (1) the free list is empty, allocate by extending the heap, (2) a free block of the correct size is found, allocate this block, and (3) the free list contains blocks that are not the correct size, allocate by extending the upper bound of the heap. The execution-time equations for **New-org** are:

| | | |
|------------------------|-------------------------------------|---------------|
| 1. free list empty | $89.25 + 28.70 * L$ | [433.65us] |
| 2. allocate free block | $76.30 + 30.80 * Korg + 28.70 * L$ | [497.70us] |
| 3. extend heap | $117.95 + 30.80 * Norg + 28.70 * L$ | [1232.35us] |

Norg [25] the number of blocks on the free list.

Korg [2.5] the number of blocks searched to find one of the correct size.

L [12] the size in words of the newly allocated block, represents the time required to zero the block (the $28.7 * L$ term could be recoded to $11.9 * L$).

The **New-tag** algorithm also performs three forms of allocation: (1) allocate an entire block from the free list, (2) allocate the lower portion of a block from the free list, and (3) allocate by extending the heap. **New-tag**:

| | | |
|--------------------------|-------------------------------------|--------------|
| 1. entire free block | $160.65 + 26.60 * Ktag + 11.90 * L$ | [303.45us] |
| 2. portion of free block | $207.90 + 26.60 * Ktag + 11.90 * L$ | [350.70us] |
| 3. extend heap | $176.05 + 26.60 * Ntag + 11.90 * L$ | [531.65us] |

Ntag [8] the number of blocks on the free list.

Ktag [3] the number of blocks searched to find one of the correct size.

L [12] the size in words of the newly allocated block.

The advantage of **New-tag** results from the fewer blocks contained on its free list. In the 100 free-block example given in section 2, a single call of **New-org** runs 3,542.35 us., while **New-tag** runs 378.00 us. The free list for **New-tag** contains only one block. Remember that **New-org** is extending the heap, while **New-tag** is reusing memory from the free list.

The **Dispose-org** algorithm has two major forms of releasing storage: (1) add the block to the free list and do not decrease the upper bound of the heap, and (2) decrease the upper bound of the heap by the size of the block being disposed. Also, (3) worst-case execution time for a single call is the dispose of the keystone block described in section 2; representative time is given with **Norg**=25 for comparison with (1) and (2). **Dispose-org**:

| | | |
|---------------------|---|-----------------|
| 1. add to free list | $72.45 + 42.00 * Norg$ | [1,122.45us] |
| 2. decrease heap | $92.05 + 42.00 * Norg$ | [1,142.05us] |
| 3. worst-case | $72.45 + 42 * (\text{Sqr}(\text{Norg})/2) + 61.60 * Norg$ | [14,737.45us] |

The Dispose-tag algorithm has six forms of releasing storage: (1) scan the free list and insert the block without a merge, and (2) five forms of merging the block without a scan, the range and average of these are given. (3) The keystone dispose is not worst case for Dispose-tag; it would execute as a merge operation. Instead, worst case is a full scan of the free list to insert the block at the bottom of the free list. Dispose-tag:

| | | |
|--------------------|--------------------------|--------------------|
| 1. scan and insert | 143.85 + 14.70*(Ntag/2) | [202.65us] |
| 2. merge | range (134.05 .. 205.10) | [average 173.74us] |
| 3. worst-case | 143.85 + 14.70*Ntag | [261.45us] |

An examination of the time needed to dispose an entire list shows the effect that multiple Dispose operations have on program execution. Assume a list of blocks is allocated and numbered in order of allocation (1,2,3..X); the free list is initially empty. Two simple cases of disposing the list are: (1) LAFF--last allocated, first freed--blocks are disposed in the reverse order from which they were allocated (X..3,2,1). Each call of Dispose decreases the upper bound of the heap. And, (2) FAFF--first allocated, first freed--blocks are disposed in the same order as allocation (1,2,3..X). Each call of Dispose adds the block to the free list; the last call decreases the upper bound of the heap by the extent of the entire list. Also, worst case for each version of Dispose is: (3) LAFF-keystone, described in section 2 ((X-1)..3,2,1,X), is worst case for Dispose-org. And, (4) odd-LAFF/even-FAFF is worst case for Dispose-tag. The odd numbered blocks are disposed in reverse order, then all even numbered blocks are disposed in increasing order ((X-1)..5,3,1,2,4,6..X); assume X is an even number. Each dispose of an odd numbered block must scan the entire free list to insert the block in order, the even numbered blocks merge with both lower- and upper-adjacent, and the Xth block decreases the upper bound of the heap by the extent of the list.

Dispose a list with X blocks [X=100]:

| | original | boundary tag |
|---------------------------|---|---|
| 1. LAFF | 134.05 * X [13,405us] | 134.05 * X [13,405us] |
| 2. FAFF | (134.05*X)+(42*(Sqr(X)-X)/2) [221,305us] | 355.60+(142.80*(X-2)) [14,350us] |
| 3. LAFF-keystone | (134.05*X)+(42*(Sqr(X)-(X/2))) [431,305us] | 134.05 * X [13,405us] |
| 4. odd-LAFF/ even-FAFF | (134.05*X)+ (42*((3/4)*Sqr(X)-X)) [324,205us] | (174.48*X)-(8.05)+ (14.70*((Sqr(X)/8)-(X/4))) [35,447us] |

LAFF and LAFF-keystone are respectively the best- and worst-case examples for the original Dispose. The similarity of ordering between the two complicates the evaluation of run time for programs using the original module.

While the original implementation of New and Dispose exhibits a wide range of execution times, the boundary-tag implementation is orderly even in the extreme examples.

6. Dynamic Analysis

Simulation tests were run to collect additional information on the comparative performance of the original and boundary-tag implementations of New and Dispose. The simulation program is similar to the one recommended by Knuth [K73] and is based on Monte Carlo techniques.

The test program runs in simulated time; the major loop of the program defines a simulated-clock tick. Briefly, at each clock tick: (1) All blocks that are at their lifetime limit are disposed. (2) Then, a single block is allocated, its size and lifetime determined by generator functions. The allocated block is placed on a list that is ordered by lifetime limit. (3) Statistics on heap size and utilization and the numbers of allocated and free blocks are recorded. Periodically, statistics and an optional picture of memory are output. The program continues until a simulated-time, a real-time, or a heap-size limit is reached; all tests reported here ran the full simulated-time limit of 25,000 ticks. At the end of the program, summary statistics and a frequency plot of memory use are output.

All tests were run with the same main program; only the generator functions for size and lifetime differed. A variety of generator functions were used. The functions were chosen so that the average allocated-block size was 12 words and so that the average number of allocated blocks was 50. A random number generator (0 .. 0.99999) serves as the basis for size and lifetime selection; the same sequence of random numbers was used for all tests.

Seventeen size functions were used. Each generated an even distribution of N block sizes (N = 1..17) centered around 12 words. These 17 size functions are of the form:

$$\text{size}(N) : \text{Trunc}(\text{random}*N) + (12-\text{Trunc}(N/2))$$

The function for N=5 requests allocations of 10, 11, 12, 13, or 14 words with equal probability. For N=4, allocations of 10, 11, 12, or 13 are requested; functions for even values of N request blocks whose average size is 11.5 words.

Four lifetime functions were used: (1) Random, evenly distributed from 1 to 100 simulated-clock ticks, (2) Queue, fixed value of 50 ticks, (3) Stack, allocate 100 blocks, one per tick, then dispose all of them in the reverse order from which they were allocated, LAFF, and (4) 80% Stack, lifetimes are 80% stack-like and 20% random. The equations for these functions are (simtime is the value of the simulated clock in ticks):

1. Random: Trunc(random*100) +1
2. Queue: 50
3. Stack: 100 - (simtime mod 100)
4. 80% Stack: 80 - (simtime mod 80) + Trunc(random*20) [if 0 then 1]

Each size function (17) was paired with each lifetime function (4) to produce a test (1 of 68) performed with each New and Dispose module. (Other tests produced similar results.) Statistics were gathered separately for each test-module combination.

Figure 1 plots the average number of blocks on the free list versus the size function for each test. Data points of the same lifetime function and New and Dispose module are connected. Each data point is the sum of the free-block counts from each simulated-clock tick averaged over 25,000 ticks. The free-block counts for the stack-lifetime tests were always zero and are not plotted.

Another way to view the results is to consider the ratio (p) of free blocks to allocated blocks; the average number of allocated blocks is approximately 50 for all tests. In the random-lifetime curves, the boundary-tag module starts with p=5.4% when N=1 and increases to p=20.3% when N=7 where a plateau develops not rising above 24%; results with the original module begin with p=10.7% when N=1, p=72.6% when N=7 and continues to increase until p=130.2% when N=17. The other lifetime functions show an even greater difference between the two modules.

Figure 2 shows the average of total heap size divided by the number of allocated words, a measure of a module's memory-space efficiency. A value of 100% means that all words (average 600) are allocated and that there is no additional overhead; the stack-lifetime tests with the original module show this performance. Even though there are no free blocks, stack-lifetime tests with the boundary-tag module show a 17% overhead due to the two boundary words needed for each block. Since the average allocated block is 12 words, 14 words actually are used; smaller or larger blocks

respectively raise or lower this overhead. The other lifetime tests show a correspondence between overhead and free blocks. The original module's overhead increases with increasing N while the boundary-tag module's overhead stabilizes.

Maximum heap size also closely corresponds to the number of free blocks and to the average heap size for the various tests. The maximum heap size for the original module was about 17% greater than average heap size, and the maximum for the boundary-tag module was 20% greater. However, maximum heap size for the original module was generally more than 20% greater than maximum heap size for the boundary-tag module.

Figure 3 presents the total run time of each test. Special hardware to measure only the run time of the New and Dispose operations was not available. The simulation program was revised to provide more meaningful run times; specifically, free blocks were not counted and statistics were not gathered since these measures vary between modules. The same random number sequence was used so that these statistical measures would be the same as in the previous tests with the unrevised program. The revised simulation program still included test-specific operations, such as calculation of lifetime and size of the block to be allocated and maintenance of the ordered-by-lifetime list of allocated blocks; however, since the test specific operations depend on the test performed rather than the New and Dispose module, a comparison between modules is meaningful even though comparisons between different test types may not be. Note that the run time difference between the original and boundary-tag modules on the same test is entirely due to the run times of New and Dispose.

The stack-lifetime tests contain the fewest test-specific operations and are considerably shorter than the other tests. The tests with other lifetime functions contain more test-specific operations and exhibit a shape similar to the previous two figures.

The boundary-tag module frequently maintains a smaller heap even though the two additional boundary words are needed per block. Thus, programs using the boundary-tag module are less likely to terminate from heap-stack collision. The boundary-tag module executes faster even though it involves more computation to allocate a portion of a larger block and to doubly link and order the free list.

The boundary-tag module's performance can be explained by the "systematic" memory-management strategy employed. The effects of the ordered free list, the first-fit allocation, and the allocation of the lower portion of a free block ensure that allocations are made as low as possible in memory; this results in a smaller heap and in maximal reuse of free memory. The boundary tags permit a merge of adjacent free blocks without a scan of the free list, and the resulting shorter free list permits a faster scan, when necessary. Similar results are analyzed more fully by Shore [S77].

7. Future Directions

Fine Tuning

The boundary-tag New and Dispose module shows improved performance in execution time and free block count. However, the two boundary words per block sometimes can use a significant proportion of total memory. This is true only when the heap contains many small blocks. Can this overhead be reduced?

The current module optimizes execution time with the added boundary words; however, much of the boundary-tag module's improved performance can be attributed to merged adjacent free blocks, the ordered free list and first-fit allocation. It may be possible to modify or eliminate the boundary words with only a slight increase in execution time.

To permit separate tests of each modification, the module should be revised in stages that progressively simplify the structure of a heap block. First, remove the upper boundary word. Without this boundary tag, the dispose operation must always scan the free list. Second, remove the backward pointer and singly link the free list. Now, the free list can be scanned only forward. Currently, Dispose scans the free list from top to bottom in order to minimize the average depth of a scan; a block being disposed would seem to be nearer the top of the heap (a test of this supposition is

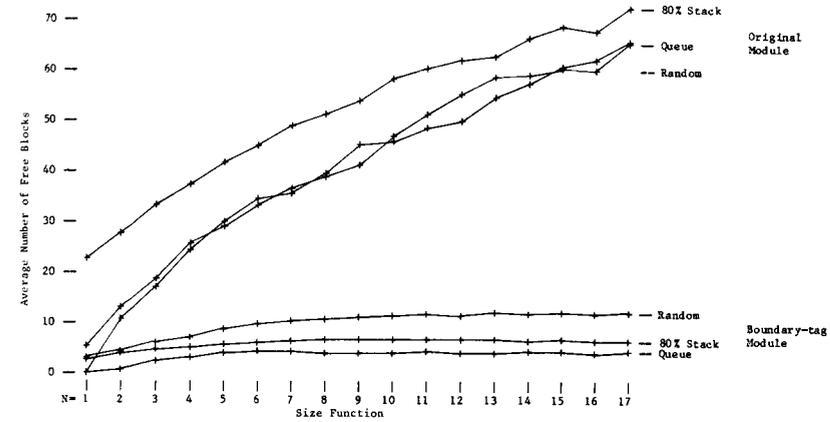


FIGURE 1. FREE BLOCK COUNT

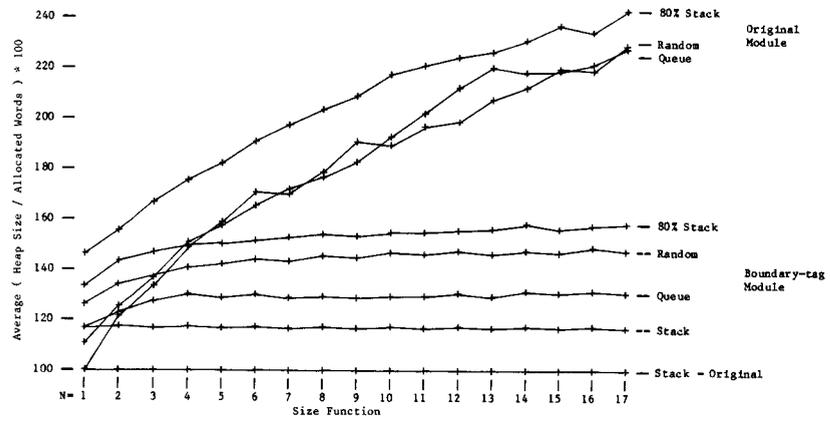


FIGURE 2. HEAP UTILIZATION

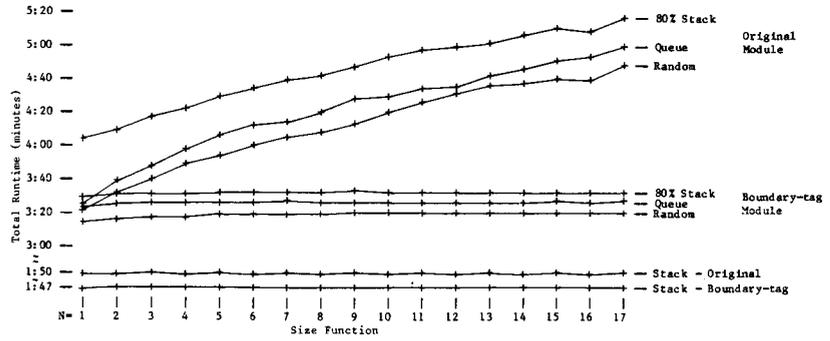


FIGURE 3. TOTAL RUNTIME OF TESTS

necessary, cf., [S77]). Finally, remove the lower boundary word. This lower boundary word contains the actual size of the block which may be slightly larger than the requested block. Remember that while a free block is being allocated if the upper portion is too small to fit on the free list, the entire block is allocated. Therefore, the elimination the lower boundary word is not recommended.

Alternately, other methods of allocating small size blocks could be explored. Architectures which have large word sizes (32-.64 bits) and restricted byte addressing exhibit a greater memory-space overhead when small blocks are requested. One possible method (described using a 16-bit architecture) allocates a larger block, e.g., 16 words, and allocates successive requests of one word from this same block; an additional word in the block would "bit map" the allocated portions. When the block is full, another 16-word block would be allocated. This method would require a separate free list of these partially allocated blocks. This two-tier structure could be considered for 2, 3, ... word blocks, also. Such an arrangement of heap structure could reduce memory-space overhead for small blocks while maintaining the advantages of boundary tags. Other improvements in the boundary-tag module may be possible in a different implementation environment.

Extensions

The boundary-tag module provides a fully general facility, permitting all typical uses of memory management. The heap becomes a perfect place to store objects whose size is run-time dependant.

The run-time system can make extensive use of the heap for I/O buffers, queues, etc. Small processor systems can use the heap for external code swapping instead of using the traditional overlay scheme. Demand paging (with random access files) can be used for virtual arrays and data base files.

The Pascal set type need not be restricted to the typical 64 or 256 elements.

Extensions to standard Pascal (i.e., dynamic arrays, strings, etc.) are easily implemented. For example, an Allocate procedure has been written with which a program can request any size block from the heap at run time. Allocate has been used to implement dynamic arrays accessed via a pointer.

The boundary-tag module provides the programmer with a powerful and efficient heap structure that not only implements standard Pascal effectively, but also permits applications that extend Pascal's scope.

Acknowledgment

I would like to thank William J. McIlvane and F. Garth Fletcher for their helpful comments on drafts of this paper.

References

- [AU77] Aho, Alfred V., and Ullman, Jeffery D., Principles of Compiler Design, chapt. 10, Addison-Wesley, Reading, MA, 1977.
- [DEC77] Microcomputer Handbook, Digital Equipment Corporation, Maynard, MA, 1977, pp. B1-B5.
- [DEC78] RT-11 Advanced Programmer's Guide, Digital Equipment Corporation, Maynard, MA, 1978.
- [ESI76] "ESI-Pascal Supplement to the User Manual and Report," Electro-Scientific Industries, 13900 NW Science Park Drive, Portland, OR, 1976, 1977.
- [FL77] Fischer, Charles N., and LeBlanc, Richard J., "Run-Time Checking of Data Access in Pascal-Like Languages," in Lecture Notes in Computer Science, Vol. 54, Springer-Verlag, New York, 1977, pp. 215-230.
- [G76] Griffiths, M., "Run-Time Storage Management," in Lecture Notes in Computer Science, Vol. 21, Springer-Verlag, New York, 1976, pp. 195-221.

- [H76] Hill, Ursula, "Special Run-Time Organization Techniques for Algol-68," in Lecture Notes in Computer Science, Vol. 21, Springer-Verlag, New York, 1976, pp. 222-252.
- [HS76] Horowitz, Ellis, and Sahni, Sartaj, Fundamentals of Data Structures, Computer Science Press, Woodland Hills, CA, 1976, pp. 142-155.
- [HS78] Horowitz, Ellis, and Sahni, Sartaj, Fundamentals of Computer Algorithms, Computer Science Press, Woodland Hills, CA, 1978.
- [JW74] Jensen, Kathleen, and Wirth, Niklaus, Pascal User Manual and Report, Springer-Verlag, New York, 1974, 1978.
- [K73] Knuth, D.E., The Art of Computer Programming, Vol. 1, 2nd ed., Addison-Wesley, Reading, MA, 1973, pp. 435-463.
- [NAJNJ76] K.V. Nori, U. Amman, K. Jensen, H.H. Nageli, Ch. Jacobi, "The Pascal <P> Compiler: Implementation Notes, Revised Edition," Eidgenossische Technische Hochschule, Zurich, 1976.
- [OMSI78] "OMSI-Pascal-1 User's Manual," Oregon Minicomputer Software, Inc., 2340 SW Canyon Road, Portland, OR 97201, 1978.
- [S74] Shaw, Alan C., The Logical Design of Operating Systems, Prentice-Hall, Englewood Cliffs, NJ, 1974, pp. 130-137.
- [S77] Shore, John E., "Anomalous Behavior of the Fifty-Percent Rule in Dynamic Memory Allocation," Com. ACM 20,11 (Nov. 1977), pp. 812-820.
- [W76] Wirth, Niklaus, Algorithms + Data Structures = Programs, chapt. 4, Prentice-Hall, Englewood Cliffs, NJ, 1976.

Appendix

Notes

- The Pascal code in Appendixes A and B closely mirrors the actual run-time library sources which are in Macro-11 assembler code. The original New and Dispose Pascal sources are translated from OMSI-Pascal's run-time library.
- Extensions to standard Pascal are used.
 - (1) Pointer arithmetic is used where necessary. A pointer is evaluated as a positive 16-bit integer, i.e., range 0..64K. Although addresses are actually in bytes, word addressing is generally used. The comment, {^}, at the left margin marks pointer arithmetic.
 - (2) The construct, "@<identifier>", evaluates as the address of the storage location where the named object, <identifier>, is stored. Those familiar with OMSI-Pascal will recognize this extension. The comment, {@}, at the left margin marks this usage.
- In Appendix D, much of the documentation text has been removed. Most of the information has been covered in the body of this paper.
- Persons wishing to install the boundary-tag module in their OMSI-Pascal should note that file open code (in S3 or SUPOPN) uses storage on the heap without calling New. This code should be changed so that storage is allocated by an explicit call to New.

 -----Appendix A-----Original New and Dispose-----

```

type
  blockptr = ^block;
  block = record
    next : blockptr; {--link to next free block--}
    bsize : integer; {--size in words of block--}
    filler : array [3..bsize] of word
  end;

```

```

var
  Free,      {--pointer to beginning of free list--}
  Kore : blockptr; {--pointer to beginning of unused area--}

```

```

function New (size{in words} : integer) : blockptr;
  {--calling sequence: P := New(size)--}

```

```

var
  scan, lastscan : blockptr;
  i : integer;
begin{New}
  scan := nil;
  if ( (Free <> nil) and (size >= 2{words}) )
  then {--free list is not empty--}
  begin {--search for exact-fit--}
    lastscan := @Free; {--i.e., lastscan^ = Free--}
    scan := Free;
    while ( (scan^.bsize <> size) and (scan <> nil) ) do
      begin
        lastscan := scan;
        scan := scan^.next
      end
    end;
  end;

  if ( (scan <> nil) and (size >= 2{words}) )
  then {--free block found, unlink it from list--}
  lastscan^.next := scan^.next
  else {--no free block found or size is 1 word--}
  begin {--extend heap for new block--}
    scan := Kore;
    Kore := Kore + size;
    if (Kore >= Stack_Pointer)
    then {--collision with stack--}
      fatal_error("Heap overwriting Stack")
    end;
  end;

```

```

  New := scan; {--return address--}
  {--clear the new block--}
  for i:=size downto 1 do scan^.filler[i] := 0
end{New};

```

```

procedure Dispose (P : blockptr; size{in words} : integer);

```

```

var
  scan : blockptr;
begin{Dispose}
  if ( (P <> nil) and (size >= 2{words}) )
  {--no action for 1 word block--}
  then
  begin
    scan := P; {--set up free block--}
    scan^.bsize := size;

```

```

    scan^.next := Free;
    Free := scan; {--link to beginning--}
    scan := @Free; {-- of free list--}

    {--search free list to release blocks from heap--}
    while (scan^.next <> nil) do
      (^) if ( (scan^.next + scan^.next^.bsize) = Kore )
      then {--release block and try again--}
      begin
        Kore := scan^.next;
        scan^.next := scan^.next^.next;
        scan := @Free
      end
      else
        scan := scan^.next
      end
    end
  end{Dispose};

```

 -----Appendix B-----Boundary-Tag New and Dispose-----

```

const
  alloc = true; {--bit set--}
  freed = false; {--bit clear--}

```

```

type
  blockptr = ^block;
  block = record
    lsize : integer, {--only bits<1..15--}
    ltag : boolean; {--only bit<0--}
    next : blockptr; {--up link by address--}
    prev : blockptr; {--down link by address--}
    filler: array [3..lsize] of word;
    usize : integer, {--only bits<1..15--}
    utag : boolean {--only bit<0--}
  end;

```

```

var
  Free,      {--pointer to boundary block at bottom of heap--}
  Kore: blockptr; {--pointer to boundary block at top of heap--}

```

```

function New (size{in words} : integer) : blockptr;

```

```

var
  scan, remscan : blockptr;
  i : integer;

  procedure initialize heap;
  begin {--only called once, to set up boundary blocks--}
    (^) Free := Kore + 1{word};
    Free^.lsize := 2{words}, Free^.ltag := alloc;
    Free^.next := Free;
    Free^.prev := Free;
    Free^.usize := 2{words}, Free^.utag := alloc;
    (^) Kore := Kore + 4{words};
    Kore^.lsize := 0 , Kore^.ltag := freed;
  end;

  begin{New}
    if (size < 2{words}) {--a request of one word--}
    then size := 2{words}; {--will return two words--}

    scan := Free;

```

```

if (Free = nil)
  then {--this is the first New call--}
  initialize heap;
else {--search free list for first-fit--}
  repeat
    scan := scan^.next
  until ( (scan = Free) or (scan^.lsize >= size) );

if (scan = Free)
  then {--did not find a large enough free block--}
  begin {--must increase heap size--}
    scan := Kore + 1{word};
    Kore := Kore + size + 2{words};
    {--stack is moved for some system calls--}
    if ( (Stack <= Kore) and (Stack > Free) )
      then {--collision with stack--}
      fatal_error("Out of Memory");
    Kore^.lsize := 0, Kore^.ltag := freed;
  end

else if ( scan^.lsize >= (size + 2{words} + 2{words}) )
  then {--found a free block that is too large--}
  begin {--split into remainder--}
    remscan := scan + size + 2{words};
    remscan^.usize := scan^.usize - size - 2{words},
    remscan^.utag := freed;
    remscan^.lsize := remscan^.usize,
    remscan^.ltag := remscan^.utag;

    remscan^.next := scan^.next;
    remscan^.prev := scan^.prev;

    remscan^.next^.prev := remscan;
    remscan^.prev^.next := remscan
  end

else {--found a free block just about the right size--}
  begin {--use the entire block--}
    size := scan^.lsize;
    scan^.next^.prev := scan^.prev;
    scan^.prev^.next := scan^.next
  end;

New := scan;
scan^.lsize := size, scan^.ltag := alloc;
scan^.usize := size, scan^.utag := alloc;
{--clear the new block--}
for i:=size downto 1 do scan^.filler[i] := 0
end(New);

procedure Dispose (P : blockptr);
{--do not need size parameter because--}
{--boundary words contain actual size--}
var
  LA, UA, scan : blockptr;
begin(Dispose)
  if ( (P < Free) or (P > Kore) ) {--OMSI permits pointers--}
  then warning("not a heap pointer") {-- to non-heap objects--}

  else if ( (P <> nil) and (P^.ltag <> freed) )

```

```

{--block better not be free already--}
then
  begin
    P^.ltag := freed;
    P^.utag := freed;
    LA := P - 2{words} - LA^.usize; {--lower adjacent of P--}
    UA := P + P^.lsize + 2{words}; {--upper adjacent of P--}

    if (LA^.utag = freed)
      then {--merge P with LA--}
      begin
        LA^.lsize := LA^.lsize + P^.lsize + 2{words};
        LA^.usize := LA^.lsize;
        P := LA
      end;

    if (UA^.ltag = freed)
      then {--decrement or merge?--}
      if (UA = Kore)
        then {--decrement Kore--}
        begin
          if (P = LA)
            then {--remove P from free list--}
            begin
              P^.prev^.next := Free;
              Free^.prev := P^.prev
            end;
          Kore := P - 1{word};
          Kore^.lsize := 0, Kore^.ltag := freed
        end
      else {--merge P with UA--}
      begin
        if (P <> LA)
          then {--also link P to previous--}
          begin
            P^.prev := UA^.prev;
            P^.prev^.next := P
          end;
        P^.next := UA^.next;
        P^.lsize := P^.lsize + UA^.lsize + 2{words};
        P^.usize := P^.lsize;
        P^.next^.prev := P
      end

    else if (P <> LA)
      then {--must search to insert P in order--}
      begin
        scan := Free;
        repeat
          scan := scan^.prev {--search from top to bottom--}
        until (scan < P);
        P^.next := scan^.next;
        scan^.next := P;
        P^.prev := scan;
        P^.next^.prev := P
      end
    end
  end(Dispose);

```

 {-----Appendix C--Remark on Error Handling-----}

Error handling receives only brief mention since its implementation depends on the facilities of the total Pascal system; however, a few problems with memory management and pointers, in general, are worth consideration (cf., [FL77]).

Correct operation depends on the integrity of the information stored to manage memory; a program that writes outside of an allocated block can corrupt management information. To prevent corruption, bounds checking should be incorporated in the Pascal implementation (bounds checking is available in OMSI-Pascal V1.1). However, a few additional tests in the boundary-tag module may provide information on the cause of a failure and possibly show how to continue program execution.

During Dispose, a block's upper and lower boundary words can be compared; a difference indicates an out-of-bounds access. The size parameter, which approximates the actual block size, can be used to examine adjacent blocks and possibly to reconstruct the boundary words. In addition, since the free list is ordered, the pointers can be checked for proper order. With a short free list, these tests would not incur a great time overhead. If the free-list links have been overwritten, the entire heap could be scanned by use of the size field in the boundary words. Sometimes regeneration of the free-list links and correction of mismatched boundary words may be possible; in most cases though, little can be done, except to terminate program execution.

Dangling pointer references also pose a problem. Compiler generated code passes the address of the block to be disposed and leaves the pointer to this block unchanged. In other words, the pointer points to a free block giving the program direct access to the free list. Dispose should be able to reference the pointer so that its value can be set to nil. When there are multiple pointers to the same block, however, the other pointers continue to reference the free list, even though the disposed pointer may be set to nil. A solution requires redesign of pointer implementation.

 {-----Appendix D--Boundary-Tag New and Dispose, Macro-11-----}

```
.TITLE NEWDIS : NEW&DISPOSE w/boundary tag
.IDENT /V0101C/
.ENABL LC,REG
```

.REPT 0

Module Version : 1.1c: 20-Jan-80 ; Tested : 26-Jan-80

Module Version : 1.1b: 17-Nov-79 ; Tested : 24-Nov-79

Module Version : 1.1 : 16-Mar-79 ; Tested : 30-Mar-79

Module Version : 1.0 : 03-Oct-78 ; Tested : 16-Oct-78

Branko J Gerovac
 Eunice Kennedy Shriver Center
 200 Trapelo Road
 Waltham, Massachusetts 02154
 (617) 893-3500 ext 157

.ENDR

```
-----
;
; .SBTTL Heap Initialization
;
; Initag Version : 1.0 : 03-Oct-78
;
; .PSECT $$$NEW ; 11.1
;
; .GLOBL $FREE,$KORE ; {# import global pointers #}
;
; INTHEP:
; proc init_heap;
; begin
;   MOV RO,-(SP) ; {# RO=$KORE #}{ $KORE is first of heap }
;   MOV @#$KORE,RO ; $FREE^.lsize:=2w , $FREE^.ltag:=alloc;
;   MOV #5,(RO)+ ; $FREE:= $KORE+1w;
;   MOV RO,@#$FREE ; $FREE^.bot:=$FREE;
;   MOV RO,(RO) ; $FREE^.top:=$FREE;
;   MOV (RO)+,(RO)+ ; $FREE^.usize:=2w , $FREE^.utag:=alloc;
;   MOV #5,(RO)+ ; $KORE:=$KORE+4w;
;   MOV RO,@#$KORE ; $KORE^:=0;
;   CLR (RO) ;
;   MOV (SP)+,RO ;
;   RTS PC ; end;
;
;-----
;
; .SBTTL $B70 : New with boundary tag
;
; Newtag Version : 1.1c: 20-Jan-80 ; change in memory overflow test
; Newtag Version : 1.1b: 17-Nov-79 ; change in memory overflow test
; --option call to debugger, Pascal V1.1
; Newtag Version : 1.1 : 16-Mar-79 ; minor changes to improve speed
; Newtag Version : 1.0 : 03-Oct-78
;
; Calling Sequence :
;
; ; NEW(P);
;
; ; MOV SIZE,-(SP) ; even size in bytes
; ; JSR PC,$B70 ;
; ; MOV (SP)+,P(Rx) ; register 5 or 6 offset
;
; Stack Image during call :
;
; |-----|
; | size | <-- return new_block address
; | PC ret |
; | RO sav |
; | R1 sav |
; | R2 sav |
; | R3 sav | <-- SP
; |-----|
;
; .PSECT $$$NEW ; 11.1
; .ENABL LSB ; 11.1
;
; .GLOBL $B70,$NEW ; {# export global procedure #}
; .GLOBL $FREE,$KORE ; {# import global pointers #}
; .GLOBL ERR1.1 ; {# import global conditional #} 1B
; .MCALL .EXIT,.PRINT ; {# import system macros #}
;
; ; { for Pascal V1.1, debugger, set true } 1B
; .IIF NDF,ERR1.1,ERR1.1=0; (undef(err1.1)|err1.1=false); 1B
;
;-----
```

```

      .IF NE, ERR1.1      ; #if (err1.1<>0) #then      1B
      .GLOBL RTERR      ; {# import global proc #}      1B
      .GLOBL COROVR     ; {# import global label #}     1B
      .ENDC             ; #endif                        1B
$B70:
$NEW:
      MOV    RO,-(SP)    ; proc NEW(size:int):pointer;
      MOV    R1,-(SP)    ; begin
      MOV    R2,-(SP)    ;
      MOV    R3,-(SP)    ;
      MOV    10.(SP),RO  ; {# save registers #}
      CMP    RO,#4.     ; {# R0==size #}
      BHIS  1$         ; if size < 2w
      MOV    #4.,RO     ; then
      ; size:=2w
      ; endif;
      MOV    @#$FREE,R1 ; {# R1==scan #}
      MOV    R1,R3      ; {# R3==FREE #}
      ; if (scan:=$FREE)=nil
      BNE   2$         ; then
      JSR   PC,INTHEP  ; init_heap;
      BR   4$         ; goto_alloc_from_$KORE
      ; endif;
      2$:
      3$:
      MOV    (R1),R1    ; repeat
      ; scan := scan^.next
      ; until
      CMP   R1,R3      ; (
      BEQ   4$         ; scan=$FREE
      CMP   -2.(R1),RO ; or
      BHIS  5$         ; scan^.size>=size
      BR   3$         ; );
      4$:
      ; if scan=$FREE
      ; then allocate_from_$KORE :
      MOV   @#$KORE,R1 ; scan:=$KORE+1w;
      TST  (R1)+      ; {# R2==KORE #}
      MOV  R1,R2      ;
      TST  (R2)+      ;
      ADD  RO,R2      ;
      MOV  R2,@#$KORE ;
      BCS  OUTMEM     ; if carry set($KORE:=$KORE+size+2w)
      CMP  SP,R2      ; or ((SP<=$KORE)
      BHI  41$        ; and
      CMP  SP,@#$FREE ; (SP>$FREE))
      BHI  OUTMEM     ; then error(out of memory)
      41$:
      ; endif;
      CLR  (R2)       ; $KORE:=0;
      BR   7$         ;
      ;
      5$:
      MOV  #8.,R2     ;
      ADD  RO,R2      ;
      CMP  -(R1),R2   ; else if scan^.size >= size+2w+2w
      BLO  6$         ; then
      MOV  (R1)+,R2   ; alloc_lower_portion_of_scanblock :
      MOV  R2,R3      ;
      SUB  RO,R3      ;
      SUB  #4.,R3     ; {# R3==scan^.size-size-2w #}
      ADD  R1,R2      ; {# R2==remscan #}
      MOV  R3,(R2)    ; remscan^.usize:=scan^.size-size-2w;
      SUB  R3,R2      ;
      MOV  R3,-2.(R2) ; remscan^.lsize:=remscan^.usize;
      MOV  (R1)+,R3   ; {# R3==scan^.next #}

```

```

      MOV    R3,(R2)+  ; remscan^.next:=scan^.next;
      MOV    (R1),(R2) ; remscan^.prev:=scan^.prev;
      CMP    -(R1),-(R2) ;
      MOV    R2,2.(R3) ; remscan^.next^.prev:=remscan;
      MOV    R2,@2.(R2) ; remscan^.prev^.next:=remscan;
      BR    7$         ;
      6$:
      MOV    (R1)+,RO  ; else allocate_entire_scanblock :
      MOV    (R1),@2.(R1) ; size:=scan^.size;
      MOV    (R1),R2   ; scan^.prev^.next:=scan^.next;
      MOV    2.(R1),2.(R2) ; scan^.next^.prev:=scan^.prev;
      ; endif;
      7$:
      ;
      MOV    R1,10.(SP) ; New:=scan;
      INC    RO         ;
      MOV    RO,-(R1)   ; scan^.lsize:=size, scan^.ltag:=alloc;
      ADD   (R1)+,R1    ;
      DEC   R1         ;
      MOV   RO,(R1)    ; scan^.usize:=size, scan^.utag:=alloc;
      CCC   RO         ; {# clear carry et al #}
      ROR   RO         ;
      8$:
      CLR   -(R1)      ; for i:=size in words downto 1 do
      SOB  RO,8$      ; scan^[i]:=0
      ; endfor;
      MOV   (SP)+,R3   ; {# pop registers #}
      MOV   (SP)+,R2   ;
      MOV   (SP)+,R1   ;
      MOV   (SP)+,RO   ;
      RTS   PC         ; end;
      OUTMEM:
      .IF NE, ERR1.1  ; #if (err1.1<>0) #then      1B
      JSR   R5,RTERR  ; rterr(coroivr)          1B
      .WORD COROVR    ;                          1B
      .IFF   #else    ; #else                    1B
      .PRINT ERRO     ; print("out of memory")
      .EXIT           ;
      ;
      ERRO:
      .ASCIZ  /?Paslib-F-NEW-Out of Memory/
      .EVEN
      .ENDC           ; #endif
      ;
      .DSABL  LSB     ;
      ;
      .SBTTL  $B72 : Dispose with boundary tag
      ;
      ; Distag Version : 1.1 : 16-Mar-79 ; check for pointer not to heap
      ; Distag Version : 1.0 : 03-Oct-78
      ;
      ; Calling Sequence :
      ;
      ; DISPOSE(P);
      ;
      MOV   P(Rx),-(SP) ; register 5 or 6 offset
      MOV   SIZE,RO     ; even size in bytes
      JSR   PC,$B72     ;

```


UNIVERSITETET I OSLO

EDB · SENTRET
POSTBOKS 1059 · BLINDERN
OSLO 3 · NORWAY



PHONE (47) - 2 - 46 68 60
BLINDERN. June 18, 1980

A Simple Extension of Pascal for Quasi-Parallel Processing

Terje Noodt
Dag Belsnes
Computing Center
University of Oslo


Mr. Richard J. Cichelli
ANPA
1350 Sullivan Trail,
P.O. Box 598, Easton
Pennsylvania 18042

Dear Mr. Cichelli,

We are of course happy to submit the QPP article for publication in Pascal News. (Actually, being a member of PUG myself, I should have thought of sending you the article earlier.)

Enclosed is a copy of the SIGPLAN article together with the code implementing the external procedures on the Nord.

Sincerely,



Terje Noodt

1 Introduction

The University of Oslo has for a number of years been engaged in the development of systems for data communications. The main work investments have been the design of suitable protocols, and the implementation of these in network node machines. Most of the node machines have been of the Nord family, produced by the Norwegian manufacturer Norsk Data A.S.

There exists no suitable language on the Nord for programming real-time stand-alone systems. Therefore, all programming has been done in assembly code. Even though we have felt the need for a high-level language tool, the cost of developing and/or implementing a suitable language was thought to be high.

Some time ago, we looked into the possibility of using the existing Pascal compiler for our purposes. It proved that a simple but usable language tool could be made from Pascal very cheaply. We have called this extension of Pascal for QPP (Quasi-Parallel Pascal). This article describes QPP and its implementation.

2 Basic primitives

The present section first discusses how to establish a suitable process concept. Then the sequencing of processes is treated.

2.1 Processes

The most important task in the design of QPP was to establish a process concept without deviating from Standard Pascal. In this context, a process is a sequential program together with a set of data on which the program operates. We call this set of data the attributes of the process.

In several respects, the Pascal procedure has the characteristics of a process. We have managed to use the procedure as a process, by overcoming the following two obstacles:

1. It is necessary that several processes can be executed simultaneously - that is, the processes must be able to have active phases in quasi-parallel.

When a process p calls DETACH, it becomes passive. Control goes to the last process x which called RESUME(p).

The following method has been used to implement RESUME and DETACH efficiently and with ease.

A Pascal procedure object will normally contain one location for the return address (RA), and one location for the dynamic link (DL). Let CP be a pointer to the currently active process, and consider the main program to be a process with the name MAIN.

The operation RESUME(p) leaves the current program address in CP.RA, and the address of the currently active object (which may be CP itself or an ordinary procedure called by CP) in CP.DL. p.DL becomes the new active object, and execution is resumed at p.RA.

The DETACH operation is restricted to be used to give control back to the main program. It leaves the current program address in CP.RA, and the address of the currently active object in CP.DL. MAIN.DL becomes the new active object, and execution is resumed at MAIN.RA.

The DL location of a process is zero while the process is executing. Thus, CP is found by following the DL chain until DL equals zero. The following function is provided to enable the Pascal program to find CP:

```
function THISPROCESS: PTRPROCESS;
```

2.3 Summary

With a very small effort a primitive but usable process concept has been implemented within Pascal. On the Nord-10, the routines NEWPROCESS, RESUME, DETACH and THISPROCESS consist of ca 60 assembly instructions. No changes have been made to the Pascal compiler or the Pascal run-time library. Although Pascal may operate differently on other computers, the authors believe that our method of implementation may be adapted to most Pascal systems.

On the Nord-10, an ordinary procedure called from a process will execute in the memory space allocated to that process. This requires that the process object be large enough to accommodate such procedure calls. We have solved this problem by letting NEWPROCESS have one extra parameter, giving the largest necessary space for the process.

3 Process Scheduling

Section 2 defines and indicates how to implement a process concept and the basic primitives for process sequencing. To program a real-time system or a simulation model, some

additional concepts are needed. Also in this case SIMULA 67 is used as a source of inspiration. The new programming platform contains:

- * a system time concept.
- * a "sequencing set" containing the processes scheduled for future execution.
- * primitives for process scheduling.

In this section we show how these concepts may be implemented in Standard Pascal, using the basic primitives of section 2.

3.1 Simulated time, Real time

In the case of simulations, the system time is introduced as in SIMULA, but in a real-time environment the system time corresponds closely to the time defined by the computer's real-time clock. The system time is represented by a variable in the main program:

```
SYSTIME:real;
```

The execution of an active phase of a process, called an event, is regarded as not consuming system time. That is, SYSTIME is only updated between the events. How SYSTIME is updated is described below.

3.2 The sequencing set

A process may be scheduled for the execution of a future event. An event is associated with a system time, indicating when the event will occur. This time is represented by a variable local to each process:

```
EVTIME:real;
```

All scheduled processes are collected in a set, the sequencing set, sorted on the EVTIME variable. The sequencing set is represented by a main program variable:

```
SQS:PTRPROCESS;
```

which points to the first member of the set, and a variable

```
NEXTPR:PTRPROCESS;
```

in each process pointing to the next element of the sequencing set.

When an active phase of a process ends, the first process P in the SQS will be the next process to execute an event. The value of SYSTIME is changed to EVTIME of P. If simulated time is used, the simulation is carried on by resuming the process P.

In a real-time system the new value of SYSTIME is compared with the computer's clock. If the difference is positive, the Pascal program makes a monitor call to release the use of the

- 2. It must be possible for processes to exchange information - that is, one process must be able to access the attributes of another process.

To transform the procedure concept into a process, point 1. requires that the attributes of a "process-procedure" must be retained while it has a passive phase. That is, a "process-procedure" cannot execute on the stack top as usual, but must have some permanent space in memory.

Point 2. requires some form of looking "into" a procedure. In Pascal, a similar mechanism is given by the record concept. Consider the following program fragment:

```

type
  PROCESS = record
    x, y: T
  end;
  PTRPROCESS = ↑PROCESS;
var
  p: PTRPROCESS;

procedure processprogram;
var
  LOCALS: PROCESS;
begin
  with LOCALS do
    begin
      . . .
    end
  end
end

```

Within the with statement in processprogram the attributes x and y may be accessed directly.

A process is created by calling the function

```

function NEWPROCESS(procedure PROG);

```

This function allocates data space for the procedure PROG on the heap. The function value is a pointer to the record containing the process attributes. In reality, the pointer is a reference to the inside of the procedure object. The Pascal system, however, treats the pointer as if it were generated by the NEW function.

The main program (or another process) may access the attributes through the pointer generated by NEWPROCESS.

The following program fragment shows how a process is generated, and its attributes accessed from the outside:

```

p := NEWPROCESS(processprogram);
. . .

```

```

p↑.y := . . .
with p↑ do
  if x = . . .

```

Several processes of the same type may be generated as follows:

```

var
  p1, p2: PTRPROCESS;
  . . .
  p1 := NEWPROCESS(processprogram);
  p2 := NEWPROCESS(processprogram);

```

Processes of different types may be defined by declaring different PROCESS types, or by defining a variant part for each type of process within PROCESS.

Thus, a usable process concept has been established by

1. Implementation of the function NEWPROCESS. In Nord-10 Pascal this is an assembly routine of 15 instructions.
2. Requiring that the programmer stick to the following rules:
 - a. Define a record type PROCESS which contains those variables of a process which are to be visible from outside the process.
 - b. Declare a variable LOCALS of type PROCESS as the first variable within the process procedure.
 - c. Surround the statements of the procedure by with LOCALS do begin . . . end

2.2 Sequencing

It must be possible to start and stop the execution of any process, in order that operations occur in the sequence required by the actual application. For this purpose, two operations are implemented (these are modelled after the corresponding primitives in Simula 67):

```

procedure RESUME(p: PTRPROCESS);

```

This procedure transfers control from the caller to the process given by the actual parameter p. The execution of p is resumed at the place where the process last became passive. The caller becomes passive.

```

procedure DETACH;

```

CPU for the given amount of time. On return from the monitor call the procedure RESUME(P) is called.

3.3 Process scheduling

The following procedures define a small but convenient set of operations for discrete event scheduling. All procedures are written in Standard Pascal. The amount of Pascal code is about 40 lines. For a detailed description see the appendix.

procedure PASSIVATE;

The caller process ends its active phase, and the next event is given by the first element of the SQS. SYSTIME is updated, and in the real-time case the program may request a pause before the next process is resumed.

procedure HOLD(del:real);

Equivalent to PASSIVATE, except that the caller is put into the SQS with an event time equal to SYSTIME+del.

procedure ACTIVATE(p:PTRPROCES; del:real);

The process p is scheduled to have an event at the time SYSTIME+del.

procedure CANCEL(p:PTRPROCESS);

If the process p is scheduled to have an event, this event is cancelled. That is, p is removed from the SQS.

3.4 Summary

Based on the basic primitives discussed in section 2, we have defined a set of additional primitives suitable for discrete event scheduling. These primitives are implemented by Standard Pascal procedures and data structures. The system time concept is introduced in two variations: simulated time and real time. In the implementation the difference between the two time concepts is only visible as a small modification of the procedure PASSIVATE. An important consequence is that it is possible to test out a program by simulation and afterwards use the same program as a part of a real time system.

4 Concluding remarks

As an example, the Bounded Buffer problem has been programmed in the appendix.

At the University of Oslo, QPP has been used to program the UNINETT node. UNINETT is a computer network of the central computers of all universities in Norway, plus several other governmental computers. Each institution has a node machine

which hooks one or more computers into the network. At the University of Oslo, this node is a Nord-10. The size of the UNINETT node program is about 2200 lines of QPP code. In the development of this program, keeping to the restrictions of QPP was neither hampering nor the cause for any serious problems. The UNINETT project has shown that a considerable amount of development time may be gained by going from assembly code to a "primitive" high-level language tool. In cases where a full-fledged language tailored to the actual application (such as Concurrent Pascal) is not available, there seems to be good reason to select a solution such as ours.

The UNINETT node program was developed on a Nord-10 running the MOSS operating system. The first step in testing the program was to run it under MOSS as a simulation, using simulated time. Then the program was run in real time under MOSS. Finally, the program was transported to the UNINETT node machine, where it runs in real time. The node machine has a rudimentary operating system only, which supports stand-alone systems of this kind. The small size of the code which implements the QPP process primitives, has allowed us to easily make different versions to adapt to the environment in which the UNINETT program was to be run. It has proved very valuable to run the program as a simulation before it was run in real time. Development time was also saved by testing under an operating system with utilities such as interactive debugging, a file system etc. The errors remaining after transporting the program to the node machine have been few.

The reader who compares QPP with for instance Concurrent Pascal, will remark that QPP contains no primitives for the protection of shared data. Such a mechanism could be useful in QPP, but is not strictly necessary. The reason is that processes run in quasi-parallel rather than true parallel. An active phase of a process is regarded to take zero time, and thus is an indivisible operation. Time increases only when control is transferred from one process to another. It is the programmer who decides at which points in the program this may occur.

Appendix

This appendix contains a simple example of the use of QPP. A producer process generates characters which are read by a consumer process. The rate of production/consumption is up to the processes themselves, and in order to remove some of the time dependency between the processes, they are connected by a bounded buffer. However, since the buffer may get full (or empty) there is still need for some synchronization of the processes. This is achieved by the use of the ACTIVATE and PASSIVATE primitives.

The program also contains a complete implementation of the concepts defined in section 3. Names corresponding to concepts and primitives in QPP are written in capital letters, while small letters are used for variables particular for the example.

```

program prodcon;
const
  buflen = 16;
  buflgml = 15;
type
  (* definition of bounded ring buffer *)
  bufindex = 0..buflgml;
  buf=record
    p,c:bufindex;
    txt:packed array[bufindex] of char;
  end;
  ptrbuf=↑buf;
  (* definition of the data structure of the processes *)
  PTRPROCESS=↑PROCESS;
  processtype=(producer,consumer);
  PROCESS=record
    NEXTPR:PTRPROCESS; EVTIME:real; INSQS:boolean;
    case processtype of
      producer:(outbuf:ptrbuf; outcha:char);
      consumer:(inbuf :ptrbuf; incha :char);
    end;
  end;
var
  SQS:PTRPROCESS; SYSTIME:real;
  ptrpro,ptrcon:PTRPROCESS;
  (**          basic primitives          **)
function NEWP(procedure p; siz:integer):PTRPROCESS; extern;
function THISP:PTRPROCESS; extern;
procedure RESUME(p:PTRPROCESS); extern;
procedure DETACH; extern;

```

```

(**          sequencing routines          **)
procedure INTOSQS(p:PTRPROCESS);
var rp,rpo:PTRPROCESS;
begin
  with p↑ do
    begin
      rp:=SQS; rpo:=nil;
      while (rp<>nil) and (rp↑.EVTIME<EVTIME) do
        begin rpo:=rp; rp:=rp↑.NEXTPR end;
        if rpo=nil then SQS:=p else rpo↑.NEXTPR:=p;
          NEXTPR:=rp; INSQS:=true
        end;
      end;
    end;
  procedure CANCEL(p:PTRPROCESS);
  var rp,rpo:PTRPROCESS;
  begin
    with p↑ do
      if INSQS then
        begin
          INSQS:=false; rp:=SQS; rpo:=nil;
          while rp<>p do begin rpo:=rp; rp:=rp↑.NEXTPR end;
            if rpo=nil then SQS:=rp↑.NEXTPR else rpo↑.NEXTPR:=rp↑.NEXTPR;
              end;
          end;
        end;
      procedure PASSIVATE;
      var p:PTRPROCESS;
      begin
        p:=SQS; if p=nil then DETACH else SYSTIME:=p↑.EVTIME;
          (* if realtime then monitor call PAUSE(SYSTIME-CLOCK) *)
          SQS:=p↑.NEXTPR; p↑.INSQS:=false; RESUME(p)
        end;
      end;
      procedure HOLD(del:real);
      var p:PTRPROCESS;
      begin p:=THISP; p↑.EVTIME:=SYSTIME+del; INTOSQS(p); PASSIVATE end;
    end;
  procedure ACTIVATE(p:PTRPROCESS; del:real);
  begin CANCEL(p); p↑.EVTIME:=SYSTIME+del; INTOSQS(p) end;

```

```

(**          buffer routines          **)
function bufempty(bp:ptrbuf):boolean;
  begin bufempty:=(bp↑.p=bp↑.c) end;
function buffull(bp:ptrbuf):boolean;
  begin buffull:=((bp↑.p+1) mod buflength)=bp↑.c) end;
function putchar(bp:ptrbuf; ch:char):boolean;
  begin with bp↑ do
    if ((p+1) mod buflength)=c then putchar:=false else
      begin txt[p]:=ch; p:=(p+1) mod buflength; putchar:=true end;
    end;
function getchar(bp:ptrbuf; var ch:char):boolean;
  begin with bp↑ do
    if p=c then getchar:=false else
      begin ch:=txt[c]; c:=(c+1) mod buflength; getchar:=true end;
    end;
(**          processes          **)
procedure pproducer;
var LOCALS:PROCESS;
begin DETACH;
  with LOCALS do
    while true do
      begin
        (* produce next character *)
        if bufempty(outbuf) then ACTIVATE(ptrcon,0);
        while not putchar(outbuf,outcha) do PASSIVATE
        end
      end;
end;
procedure pconsumer;
var LOCALS:PROCESS;
begin DETACH;
  with LOCALS do
    while true do
      begin
        if buffull(inbuf) then ACTIVATE(ptrpro,0);
        while not getchar(inbuf,incha) do PASSIVATE;
        (* consume character *)
      end
    end;
end;
(**          main program          **)
begin
  ptrpro:=NEWP(pproducer,100); ptrcon:=NEWP(pconsumer,100);
  new(ptrpro↑.outbuf); ptrcon↑.inbuf:=ptrpro↑.outbuf;
  RESUME(ptrpro)
end.

```

```

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%
%                               Q P P
%
% RUN-TIME ROUTINES TO TRICK THE NORD PASCAL SYSTEM
% INTO TREATING QUASI-PARALLEL PROCESSES
%
% (IN THIS VERSION THE RESTRICTION THAT DETACH MAY RELINQUISH
% CONTROL TO THE MAIN PROGRAM ONLY, HAS BEEN REMOVED)
%
% PROGRAMMER: T. NOODT, COMPUTING CENTER, UNIV. OF OSLO
% DATE:      JUNE, 1980
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%
% NOTE:
%
% 1. THE NORD-10/100 REGISTERS ARE:
%    P PROGRAM COUNTER
%    L LINK REGISTER
%    X POST-INDEX REGISTER
%    B PRE-INDEX REGISTER
%    T TEMPORARY REGISTER
%    A ACCUMULATOR
%    D EXTENDED ACCUMULATOR
%
% 2. THE B REGISTER CONTAINS A POINTER TO THE CURRENTLY ACTIVE
%    OBJECT + 200 OCTAL.
%
% 3. WHEN A ROUTINE IS CALLED, THE PARAMETERS ARE FOUND AT ADDRESS
%    (B) + (A) + N, WHERE N=4 FOR FUNCTIONS, N=3 FOR PROCEDURES.
%
% 4. A FUNCTION RESULT IS TRANSFERRED IN A.
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
RETB=   -2           % RETURN B
RETP=   -1           % RETURN P
STLK=    0           % STATIC LINK
DYLK=    1           % DYNAMIC LINK
                    % POINTS "INWARD" IN PROCESSES
LSC=     2           % LOCAL SEQUENCE CONTROL
PARAM=   4           % RELATIVE LOCATION OF PARAMETERS
SAVB=   10           % SAVE LOCATIONS
SAVL=   11
SAVX=   12

)9BEG
)9LIB   NEWP
)9ENT   NEWP 5PESH
)9EXT   5PNEW
%
% FUNCTION NEWP(PROCEDURE P; SIZE:INTEGER):PTRPROCESS;
%
% GENERATE NEW PROCESS
% P IS THE PROCESS CODE
% SIZE IS THE OBJECT SIZE
%
NEWP=
*
  SWAP      SA DB
  RADD      SA DB           % B IS NOW TOP OF STACK
  STA       SAVB,B         % SAVE POINTER TO CALLER OBJECT
  COPY      SL DA

```

```

STA      SAVL,B          % SAVE POINT OF CALL
COPY    SB DX
LDA     PARAM+3,B      % GET SIZE
AAA     2               % ADD SPACE FOR RETB AND RETP
JPL I   (5PNEW         % CALL NEW TO GET OBJECT
LDX     0,B            % OBJECT POINTER
AAX     2               % ADJUST POINTER PAST RETB AND RETP
LDA     PARAM+1,B     % P'S STATIC LINK
STA     STLK,X
LDA     SAVL,B
STA     RETP,X
LDA     SAVB,B
STA     RETB,X
STZ     DYLK,X        % INDICATE ACTIVE PROCESS
LDT     PARAM+2,B    % P'S CODE
AAT     4              % SKIP FIRST 4 INSTRUCTIONS OF P
                    % (THEY DO NON-RELEVANT CHECKS)

COPY    SX DA
AAA     3              % "RECORD" POINTER
                    % (REFERS TO FIRST LOCAL VARIABLE)

COPY    SA DB
AAB     175           % STACK POINTER
COPY    ST DP        % EXECUTE PROCESS

) FILL                % (GENERATE LITERALS)

5PESH=  *              % IGNORE THE USUAL STACK-HEAP OVERFLOW CHECK
EXIT

)9END

)9BEG
)9LIB   THISP
)9ENT   THISP
%
% FUNCTION THISP: PTRPROCESS;
%
THISP=  *
COPY    SB DX
LDA     DYLK-200,X   % FOLLOW DYNAMIC LINK
JAZ     *+3         % UNTIL IT IS ZERO (=PROCESS FOUND)
COPY    SA DX
JMP     *-3
COPY    SX DA
AAA     -175        % ADJUST POINTER BY -200+3
EXIT

)9END

)9BEG
)9LIB   RESUME
)9ENT   RESUME
%
% PROCEDURE RESUME(PTR: PTRPROCESS);
%
RESUME= *
COPY    SA DX
LDX     3,X,B       % PTR
AAX     -3          % TOP OF OBJECT
COPY    SL DA
STA     RETP,X     % RETURN POINT

COPY    SB DA
STA     RETB,X
LDA     DYLK,X
COPY    SA DB
STZ     DYLK,X     % INDICATE ACTIVE PROCESS
LDA     LSC,X
COPY    SA DP      % JUMP

)9END

)9BEG
)9LIB   DETACH
)9ENT   DETACH
%
% FUNCTION DETACH: PTRPROCESS;
%
DETACH= *
COPY    SB DX
LDA     DYLK-200,X % FOLLOW DYNAMIC LINK
JAZ     *+3        % UNTIL PROCESS OBJECT IS FOUND
COPY    SA DX
JMP     *-3
AAX     -200       % ADJUST X TO TOP OF OBJECT
COPY    SB DA
STA     DYLK,X    % SET "INWARD" DYNAMIC LINK
COPY    SL DA
STA     LSC,X    % SAVE PROGRAM POINT
LDA     RETB,X   % CALLER'S OBJECT
COPY    SA DB
LDT     RETP,X
COPY    SX DA
AAA     3         % PROCESS PTR (FUNCTION RESULT)
COPY    ST DP    % RETURN TO CALLER

)9END

)9BEG
)9LIB   DISPP
)9ENT   DISPP
)9EXT   5PDSP
%
% PROCEDURE DISPP(VAR PTR: PTRPROCESS);
%
% DISPOSE PROCESS
%
% MAY BE INCLUDED IF DYNAMIC DEALLOCATION OF PROCESSES IS
% WANTED, AND THE PASCAL SYSTEM HAS THE DISPOSE PRIMITIVE.
%
DISPP= *
COPY    SA DX
LDX     3,X,B     % GET POINTER TO PTR
LDA     0,X       % GET PTR
STZ     0,X       % PTR := NIL
AAA     -5        % ADJUST TO TOP OF ALLOCATED OBJECT
SAX     177
RADD    SB DX
STA     0,X       % TRANSFER PARAMETER TO DISPOSE
JMP I   (5PDSP   % CALL DISPOSE

) FILL

)9END

)9EOF

```

Open Forum For Members



Lawrence Berkeley Laboratory

University of California
Berkeley, California 94720
Telephone 415/486-4000
FTS: 451-4000

Pascal Users Group
c/o Rick Shaw
DEC
5775 Peachtree Dunwoody Road
Atlanta, GA 30342

Hi,

I understand that the Pascal Users Group is interested in putting together a package of software tools. We of the Software Tools Users Group are doing much the same thing. We have some 50-60 tools (editing, text manipulation, formatting, sorting, command line interpreter, etc.) which simulate the Unix environment and originated from the little book Software Tools by Brian Kernighan and P. J. Plauger. The tools are currently written in ratfor, a portable Fortran-preprocessor language, and running on everything from an 8080 to a Cray. Our users group has a mailing list of almost 700 and holds meetings twice a year.


There have been several people in the group interested in translating the tools into Pascal. One man has already hand-coded a few of them in Pascal. Another group in England has used a mechanical translator written in Snobol to transfer the tools into BCPL. I think a similar translator could be developed to translate into Pascal. If people in your group were interested in our tools, perhaps we could work together to build such a translator.

I've enclosed an LBL Programmers Manual to give you an idea of what we have available. Other sites also have nice tools--University of Arizona and Georgia Tech. have good packages too. I've also sent along our newsletters to give you an idea of what the users group is doing.

Even if translation of our tools into Pascal doesn't seem feasible, do let me know if you think there might be other ways our groups could work together.

Sincerely,

Debbie Scherrer
Co-ordinator, Software Tools
Users Group



the Time-Machine Ltd.

ת"ס-תמ"מ

Dear Editor,

I am happy to have(at last) PUGN #15.

It arrived only in July, 1980, but better late than never. 2 Questions:

- 1) What happened to #14? I've never seen it.
- 2) How do I renew my membership for the next year (starting June-1980)? PUG #15 does not have any "all-purpose coupons". I am very interested in PUGN, just let me know how to pay for it.

Now,for the PASCAL issues. We use the FORMAT program published in PUGN #13, and all our sources have to pass it,so we achieve uniform layouts. There were several problems setting up FORMAT,some of them were real bugs. But now it is well and running with all the options operative. I must mention its portability. We moved it from RSX-11M to UNIX within half an hour,just by changing the file handling part.

We do almost all our development in PASCAL and have several utilities to offer to anyone interested:

- 1) File copying between CP/M and UCSD in both directions
- 2) File copying between RSX-11M and UNIX in both directions
- 3) The debugged FORMAT on RSX and on UNIX
- 4) File copying from an IBM diskette to UCSD
- 5) A big (CMD) disk driver for a Z80 under UCSD

By the way ,UCSD software seems very unportable,due to lots of non-standard tricks which are heavily used.

Best regards,

Gershon Shamay

Mgr. Software Development

Eder St. 49a, P.O.B. 72, Haifa, Israel. Phone: 04-246033.
Telex 46400 BXHA IL, For No. 8351

**System
Development
Corporation**

PASCAL USER'S GROUP
c/o Rick Shaw
Digital Equipment Corporation
5775 Peachtree Dunwoody Road
Atlanta, Georgia 30342

Dear Mr. Shaw:

I maintain PASCAL 6000 Version 2 and Version 3 at NASA, Langley Research Center, Hampton, Virginia. I have made several modifications to our compilers to enhance the usability of the compilers without changing the language itself. I am writing to describe briefly one such modification because it is easily implemented and may be useful to other installations. This modification introduces a new option to the compiler which displays the locations of the fields within a record when invoked. Following each record type declaration, the field identifiers with their relative locations in the record are given. The following is an example of the output generated by our compiler with the option invoked:

```

3   REC = PACKED RECORD
4   FIELD1: CHAR;
5   FIELD2: CHAR;
6   FIELD3: INTEGER;
7   FIELD4: PACKED ARRAY[1..200] OF BOOLEAN;
8   END;
```

```
-----
FIELD1   0:<59,54>           FIELD2   0:< 5, 0>
FIELD3   1:<59, 0>           FIELD4   2:<59, > - 5:< ,40>
```

```

9
10 VAR
11   VREC: RECORD
12     STORAGE1: INTEGER;
13     STORAGE2: CHAR;
14     STORAGE3: BOOLEAN;
15     STORAGE4: REAL;
16   END;
```

```
-----
STORAGE1 0:<59, 0>           STORAGE2 1:< 5, 0>
STORAGE3 2:< 0, 0>           STORAGE4 3:<59, 0>
```

17

The formats used above have the following meanings:

W:<B1,B2> Indicates the field is in word W relative to the start of the record and uses bits B1 through B2.

W1:<B1,>-W2:<,B2> Indicates the field is longer than 1 word beginning at word W1, bit position B1 and going through word W2 bit position B2.

This type of information can be very helpful when interfacing with other languages such as COMPASS or FORTRAN and also when trying to minimize the size of a record by rearrangement of its fields.

Sincerely,

Ricky W. Butler
Systems Programming
SDC-Integrated Services, Inc.

for

NASA, Langley Research Center
Hampton, Virginia
MS 157B

RWB/ghf

P.S. To obtain more information or the update mods for this option contact:

Rudeen S. Smith
MS 125A
NASA/Langley Research Center
Hampton, Virginia 23665
(804) 827-2886



THE UNIVERSITY OF KANSAS LAWRENCE, KANSAS 66045

Department of Computer Science
114 Strong Hall
913 864-4482

Rick Shaw
Pascal User's Group
Digital Equipment Corporation
5775 Peachtree Dunwoody Road
Atlanta, Georgia 30342

Dear Rick:

Since the last time I wrote to PUGN (PUGN #11 - February 1978), many things have happened both here at KU and with Pascal on Honeywell/GCOS. I'll start off with the new happenings with Honeywell Pascal (under GCOS not MULTICS).

Pascal version 7 is available and is finally complete (up to now the PROGRAM statement was not recognized). This version has much better error messages and is very stable (at the moment there are only a very few known bugs and those are minor). It fully implements the Pascal described in Jensen and Wirth (except for file of file). There are two major extensions: and "else" clause in the case statement and the variant record, and a relaxation of the type checking when applied to variables and constants of "packed array of char" (the first elements of each are made to align and the shorter is logically blank extended for compares and assignments; strings can be read using read). Pascal is available through Honeywell marketing, but was written and is maintained at the University of Waterloo. Anyone interested in obtaining a copy of the documentation should write to: The Oread Bookstore / Kansas Union / The University of Kansas / Lawrence, Kansas 66045 and request a copy of "Pascal on the Honeywell Computer System" (\$3.00 plus \$1.00 postage).

I have been promoting Pascal in the Honeywell Large System Users Association (HLSUA). I am the chairman of the Scientific Language committee and have given 3 talks about Pascal over the last 2 years; one a tutorial about Pascal, and the other 2 comparisons of Pascal compile and run times versus FORTRAN, B and C (unfortunately Pascal came out on the short end most of the time). I will include a copy of the 'comparison' paper with this letter.

Pascal has been in use at the University of Kansas since 1976. Almost all the undergraduate computer science classes use Pascal. We teach a university wide service course which serves as an introduction to programming to over 900 students a semester. For the past two years some portion (at least 1/3) of these students were taught Pascal (the others were taught FORTRAN). This coming Fall semester, the Pascal portion will be slightly greater than a half. Myself, another graduate student, and a faculty member

have put together a brochure which we are distributing to the faculty of other schools within the university who use our introductory class. The purpose of the brochure is to introduce the other faculty members to Pascal and to explain why we (CS) want to teach Pascal, instead of FORTRAN, in the introductory course. After sending the brochure, we meet with the faculty from the other department or school and answer any questions they want to ask and further expand upon the reasons for teaching Pascal outlined in the brochure. (Within the CS department, our little group is known as the "Pascal Road Show".) Thus far, we have only met with faculty from the School of Engineering. We have had some success. If they can find 1 more credit hour in the majors involved, they have tentatively agreed to allow their students to take Pascal as their first language if we also offer a 1 hour course for their students in which they would learn FORTRAN. We currently have plans to meet with the faculties of Business and Journalism next fall.

If any other schools have done this, I would very much appreciate hearing from you. If anyone is interested in our brochure or in talking about our experiences, I'd be happy to do whatever I can.

Other Pascal news from KU: we have a student oriented Pascal syntax checker (written in B using YACC - probably not portable except to another Honeywell). The syntax checker runs much faster than the compiler and generates much more explanative error messages. It explicitly looks for many of the mistakes commonly made by novice programmers and diagnoses them. There should be a paper written on this project (by Jim Hoch and Uwe Pleban) in the upcoming months. I have ported the Path Pascal compiler (written at the University of Illinois and acquired through Dr. Edwin Foudriat at NASA-Langly) to the Honeywell and am currently porting a newer version of the compiler (we have to change 112 out of 7562 lines in the source). We have almost all of the programs that have appeared in PUGN up and running, most of which required only minor changes. (The portability of Pascal and its availability on micro computers have been the most important arguments to others in convincing them of the value of Pascal, let's keep it standard!)

I'd like to thank everyone at PUG central (Andy, Rick, and all the others whom I don't know) for the great job you're doing. PUGN is a tremendous help in promoting Pascal and the standards efforts by PUG-USA and Tony Addyman with BSI are extremely important to the vitality Pascal currently enjoys. Again, thanks.

Sincerely,


Gregory F. Wetzel
Assistant Instructor

Dr. A. M. Addyman,
Dept. of Computer Science,
University of Manchester,
Oxford Road,
Manchester M13 9PL
England

Dear Dr. Addyman:

This is a comment on the proposed Pascal standard.

It is good to see that conformant array parameters are to be included in the Pascal standard in a neat and carefully considered manner. This will prevent the proliferation of non-standard implementations (an alarming thought).

I do wish to take issue with the proposal to exclude the "packed" attribute from the conformant array schema (Pascal News 17, p. 54). My reasoning is this.


1. A problem with Pascal perceived by a number of applications programmers is the difficulty of manipulating strings and of formatting text output (and interpreting printable input).
2. The logical response is to make available a library written in standard Pascal which will perform formatting and string manipulation. (Some can be found in Pascal News 17.)
3. If conformant packed arrays are not permitted, such a library must use standard length strings, longer than the longest actual string which is to be processed. Alternatively strings must be processed in unpacked arrays. In either case, there is a wastage of storage space, which is a significant problem for some users. Or, space can be allocated dynamically in chunks for strings. This complicates the library routines, resulting in a wastage of program storage, again a significant problem.
4. The problems cited by A.J. Sale which lead him to recommend against packed conformant arrays are really no more serious than the implementation of packed arrays themselves. When referencing any packed array, information on the bit-length of the component type is always needed. When the packed array is a conformant packed array of conformant packed arrays, the bit length will have to be passed by the calling procedure, rather than being a constant. Since the array dimensions already must be passed, this is hardly a serious problem!

5. More generally, packed arrays should be permitted to be used anywhere that unpacked arrays are permitted, unless there is a very powerful reason to forbid that use. One place where there is a real problem is in the use of a component of a packed array as a variable argument to a procedure. That is the only place where packed arrays are limited, at present. If more limitations are introduced, the result, as Sale suggests, will be non-standard compilers which support conformant packed arrays. This will have a detrimental effect on portability.

My reasoning may appear highly dependent on the perceived need for easy string manipulation facilities. But articles too numerous to mention have been appearing on the topic of strings, and the reason is that this is a problem which is encountered by virtually every applications programmer. So please - let's not go halfway on the conformant array problem.

Thank you for considering my comments.

Yours truly,



Jack Dodds

cc A. J. Sale
J. Miner
Pascal News

hunttec
(70) LIMITED



25 HOWDEN ROAD,
SCARBOROUGH,
ONTARIO, CANADA
M1B 5A6
PHONE (416) 731-8855
TELEX 8676302
CABLE HUNTOR,
TORONTO



Enertec inc.

19 JENKINS AVE., LANSDALE, PA. 19446

Phone: (215) - 362-0966

Pascal Users' Group
c/o Rick Shaw
Digital Equipment Corporation
5775 Peachtree Dunwoody Road
Atlanta, Georgia 30342

Dear Rick:

This letter is to inform you and all PUG members of the introduction of a Pascal-based real-time applications programming language called Micro Concurrent Pascal (mCP). mCP was developed and has been used by ENERTEC over the past two years. ENERTEC is a small systems software house which uses and develops Pascal-based software tools for our programming needs.

Micro Concurrent Pascal was developed from Per Brinch Hansen's Concurrent Pascal; however mCP is a language in its own right. The mCP compiler is a stand-alone program and interpreter/kernels presently exist for the Z80 and 8080/8085 microprocessors.

Brinch Hansen's Concurrent Pascal extends Pascal with the real-time programming constructs called processes, monitors and classes. In addition to the process, monitor and class constructs, Micro Concurrent Pascal contains the device monitor construct.

A device monitor is a variant of a monitor which permits the writing of device drivers directly in mCP. Each device driver is associated with a specific interrupt. Processes call device monitors to do I/O. The DOIO statement, permissible only in a device monitor, blocks the process which called the device driver until the associated interrupt occurs. Other statements restricted to device monitors allow an mCP program to access absolute hardware addresses and perform bit manipulations on data. Among other ENERTEC additions are:

- a drop-to- assembly language capability
- separate data types for 8 and 16 bit integers
- string manipulation intrinsic routines
- hexadecimal constants

Additionally, P-code output by the Micro Concurrent Pascal compiler is approximately one third the size of the P-code output by Brinch Hansen's Concurrent Pascal compiler.

I've enclosed a technical article which walks through the programming of a simple real-time operating system in Micro Concurrent Pascal. Anyone interested in mCP is invited to call or write to ENERTEC.

Keep up the great work with Pascal!

Sincerely,

Cynthia Fulton
Cynthia Fulton

CF/cc
enc.

PASCAL USERS' GROUP

Gentlemen:

I am a deputy district attorney in a rural area at the foot of the Rocky Mountains. The Institute for Law and Research, Washington, D.C., has implemented a Prosecution Management Information System (PROMIS) in COBOL for Big Machines and for minicomputers.

I am interested in adapting at least part of that system to microcomputers, especially in view of the availability of 8" hard disc drives. Pascal may be the ideal language for it. Can any of your readers provide insights into the process of creating data base management systems with Pascal, and with practical, if not optimum, algorithms for using hard disc storage? I'm fluent in MBASIC and the CP/M systems, but Pascal is new to me. I would appreciate hearing from anyone interested in the PROMIS project, as well as anyone who can recommend books or articles for the study of Pascal. The Pascal available to me presently is the UCSD Pascal for microcomputers.

Finally, I would be interested in comments concerning the relative strengths and weaknesses of the Microcomputer COBOLs for data base management vis-a-vis Pascal (assuming a Pascal implementation which includes random disc files, and reasonable interactive facilities for on-line terminal I/O).

Thank you. I look forward to seeing my first copy of the newsletter.

Sincerely,

Dennis E. Faulk
Dennis E. Faulk
911 Harrison Ave.
Canon City, CO 81212
(303) 275-1097

DataMed

RESEARCH

The Pascal User's Group, c/o Rick Shaw
Digital Equipment Corporation
5775 Peachtree Dunwoody Road
Atlanta, Georgia 30342

Dear Rick:

I am enclosing with this letter notices of two new projects of which I am very excited: the UCSD Pascal Users' Group and SOFTDOC, a medical software network featuring Pascal as the preferred language.

Fundamentally, the reason behind the UCSD users' group is that to date, it is the best Pascal system for microcomputers, trading somewhat slower execution for speedy disk access (three times faster than CP/M), a superb development and operating system, and compact code, allowing macro programs in mini memories. As we all recognize, because Pascal is so close to the machine, there is a great need to develop a library of commonly used routines so we don't have to continually "reinvent the wheel" each time we program. I and my friends have been using the UCSD system a great deal, and a fair amount of software is beginning to be exchanged -- enough to fill up two volumes. I have included the two Pascal formatters/prettyprinters published in the Pascal News No. 13, as well, and plan to enter the other superb Pascal software tools you publish as time permits.

We microcomputer users receive little benefit from software offered on 9-track tapes (I suspect the tape drive costs more than my entire system); so machine-readable software must be shared on floppy disks. Because UCSD has been so careful (almost paranoid) about preserving the integrity of their RT-11-like disk and directory format, it turns out that anyone running UCSD Pascal on a system with access to an 8-inch floppy drive can share software inexpensively, regardless of the host CPU.

I do have a question about software published in the Pascal News. Programs published in magazines or journals are generally considered to be in the public domain. Would the members of the Pascal User's Group have any objection to my offering, as inexpensively as possible, the software published in the Pascal News to anyone who can utilize an 8-inch floppy disk? Of course, the source will be acknowledged, and I am including sufficient documentation on the disk so that users need not refer elsewhere to be able to use the software. I have made the minimal changes necessary for the programs to run on a UCSD system. I would like specifically to inquire whether there is an objection to my making available the Validation Suite published in No. 16.

SOFTDOC is more ambitious than the users group project. Medical computing has been at an impasse almost since its inception: medically trained people tend not to use tools developed by nonmedical personnel, including programmers, because these tools rarely fit into the peculiarities of medical thinking and practice. So there is a history of failure, and not a little bitterness on the part of computer professionals. Few accepted uses of computers in the health sciences exist outside of the laboratory.

As you can see in the enclosed material, the aim of SOFTDOC is to form a network of health care professionals, via a floppy-disk journal, so that together we can develop medical applications for computers that are truly valued by clinicians. I am informing the members of the PUG of SOFTDOC because UCSD Pascal is the preferred language for programs submitted to SOFTDOC for disk publication. In addition, I believe the enormous potential of Pascal for medical computing (exclusive of applications requiring sizeable mathematical power and speed) has been insufficiently emphasized.

I would be interested in hearing from anyone with further ideas on sharing micro-computer software inexpensively, especially in the area of medical computing. Let me know, too, if you would like to work out some sort of reciprocal sharing arrangement. Perhaps I would send the PUG a copy of each disk as it was released, and you would publish items of interest to the broader PUG.

Sincerely,

Jim

Jim Gagné, M.D.
President

SOFTDOC is a new service recently announced by Datamed Research to aid health professionals who are interested in utilizing computer systems in their practices.

Small computers have the potential to serve a myriad of needs in health care practices. Such applications as obtaining the routine portions of histories directly from patients, patient education, and limited assistance with diagnosis or treatment are readily achievable. To date, most authors of medical computer programs have not taken into account the true needs of health care professionals, and the programs have not been utilized by those they were designed to serve. Effective medical computing requires a network of health professionals writing programs and sharing their software.

In the past fifteen years, over a hundred health professional office business systems have reached the market. While the majority have failed, a few have transformed the business office into a streamlined, highly accurate system. Unfortunately for the small office, the cost of the better systems usually exceeds \$30,000. Now, however, with the advent of quality hardware systems for well under \$10,000, new, less expensive medical business packages are being released. The difficulty is to locate software of quality amid a rain of inadequate programs.

SOFTDOC will support the emergence of high-quality, low-cost medical computing in the following manner:

1) We are now issuing a call for health-related software to be published in a quarterly machine-readable software journal.

2) The journal will also contain in-depth user reviews of both SOFTDOC and commercial software, so that together we can determine just which programs are the most effective and why.

3) Datamed Research will collect and evaluate vendor's descriptions of commercial software. In addition, user evaluations of software will be collated and summarized. Our findings will be published semiannually in the SOFTDOC journal. Vendors and users who participate in the evaluation will also receive a summary of the findings. Because to date the focus of software products for health professionals has been the business office, our initial concentration will be in this area.

The preferred medium of SOFTDOC is IBM-compatible floppy disks; for the convenience of those without 8-inch floppy drives, it will also be issued in printed form. Material on a disk may be submitted to SOFTDOC for inclusion in the first issue until May 1, 1980; all programs must be in source code form and contain adequate documentation. Publication will take place on June 1, 1980, and quarterly thereafter. Subscriptions will cost \$55 per year, or \$18 per individual diskette. Those who donate software, reviews or articles will receive a one-issue credit per item published.

Subscribers must indicate which they prefer: 8-inch, single-density, single-sided, IBM-compatible floppy disk available in CP/M or UCSD Pascal format (specify) or hard copy. We would like to find someone who can copy the material on 5-1/2 inch diskettes for distribution in that format. However, these are not available at the present.

If you are interested in promoting valid medical uses for microcomputers, we invite you to send us programs you have written. Your software will be given the widest possible distribution. Together, we may change the long overdue promise of medical computing to a reality.

Introduction.

The UCSD Pascal language system is one of the most sophisticated microcomputer software systems available today. Because of the ease with which one can write and maintain high quality programs of most types, from systems software to business applications to games, it promises to be the vanguard of an enormous interest in Pascal in the coming decade. Already a number of other Pascal implementations have appeared for microprocessors, though none so complete.

UCSD Pascal compiles its programs to P-code, designed for a hypothetical 16-bit stack machine that must be emulated in software on most microprocessors. As a result, once the P-code interpreter has been installed, programs written in UCSD Pascal may be run on any microprocessor without modification. Even the disk formats are the same, except for the minifloppies used for the Apple, North Star, or TRS-80. So disk software in either source or object form may be freely shared among users of such diverse machines as a PDP-11 or an 8080.

The Pascal Users Group.

It would seem natural for a large users group to arise to share software. To date, however, only the original Pascal Users Group ("PUG") serves this function. Primarily, they support the standard language based on the Jensen and Wirth Pascal User Manual and Report and report on available Pascal implementations and programmer opportunities. Only secondarily does the PUG disseminate software (based on Jensen and Wirth Pascal), although since 1978 the PUG has published several superb "software tools". The major difficulty with the PUG newsletter is that it is offered only on paper; any machine-readable software is offered on 9-track tapes, which are not supported by the majority of microcomputers. So a microcomputer user must type the software into the machine on his/her own.

A UCSD Pascal Users Group on machine-readable media.

Datamed Research is announcing the formation of a UCSD Pascal users' group. It will take a form very similar to the highly respected CP/M Users Group: all offerings will be on 8-inch, single density, IBM-compatible soft-sectored floppies, offered virtually at cost (\$10 per disk). Software will be donated by interested users. Software donors will receive a free disk volume of their choice in acknowledgement of their donation. For software to be accepted for distribution it MUST come with adequate documentation on the disk. Further, with rare exceptions it must be supplied in source code to allow other users to adapt it to their systems.

Potential sources of Pascal software abound; by no means must one donate only original work. There is a mountain of public-domain Basic software that is easily adapted to Pascal. In the process, one can usually spruce up the program a good deal, because Pascal is so much easier to work with than Basic. It will be important, in addition, for the users to begin a library of Pascal procedures and functions to handle the more common programming problems. For example, we need a set of mathematical functions for complex variables, statistical functions, and basic business software support (routines to translate integers into dollars and cents and vice versa) to realize the full power of the language.

You can find out more about the present status of the users group by sending a self-addressed, stamped envelope to the following address:

DATAMED RESEARCH
1433 Roscomare Road
Los Angeles, CA 90024

Alternatively, 8-inch floppies can be ordered at \$10 per volume; there are two volumes available at the present time. Because the BIOS for the 512-byte sectors is written for Digital Research's CP/M-based macroassembler, the second volume contains both a CP/M- and a UCSD-format disk (though if you prefer, both disks can be of the same type; the volume is of use primarily to those who have both CP/M and the UCSD system, however) and costs \$20. California residents must add 6% sales tax. Be sure to specify UCSD or CP/M format.

Protection
Systems



24--June--1980

Pascal User's Group
c/o Rick Shaw
Digital Equipment Corp
5775 Peachtree Dunwoody Rd
Atlanta, GA 30342

Dear Rick:

Thanks for all your work to help keep the lines of communication open between all us Pascal user's. It's good to hear that all the moving and setup is now complete.

I am currently using Pascal in developing small real-time process control systems based around Z80 micros. At present I am using Pascal/Z running under CP/M and MP/M although I am also interested in finding more out about using a concurrent Pascal compiler for the same application. Also I use UCSD Pascal for other development on the side although I am disappointed at Pascal/Z incompatibility with the UCSD Pascal. May the standard come soon.

I would very much like to hear from others in the Baltimore-Washington-Philadelphia area using Pascal/Z and/or doing real-time multi-task applications with Pascal in order to swap stories. Also would like to borrow if possible any of issues 1..8 of PN to look through or copy from someone close by.

Thank you.

Sincerely,

David McKibbin
c/o Sygnatron
2103 Greenspring Drive
Timonium, MD 21093

Pascal Standards

Pascal Standard: Progress Report

by Jim Miner (1980-07-01)

A serious disagreement over conformant array parameters is the only major remaining obstacle to obtaining an ISO standard. Hopefully both sides will quickly resolve this impasse in a friendly and diplomatic way, because there is a real possibility that one or more national groups will be compelled by time constraints to break with the international effort and seek to obtain their own standard.

RECENT EVENTS

Voting on DP 7185

The latest draft standard ("DP 7185") was published in Pascal News #18 and in SIGPLAN Notices (April 1980). Votes cast by specific national bodies on this draft are as follows.

| <u>Votes on DP 7185</u> | | |
|-------------------------|-------------------------------|--------------------|
| <u>Approval</u> | <u>Approval with comments</u> | <u>Disapproval</u> |
| Finland | Australia ** | Canada |
| Hungary | Czechoslovakia * | Germany |
| Italy | Denmark * | Japan |
| Romania * | France | U.S.A. |
| Sweden | Netherlands | |
| | U.K. | |

* "Observer" member -- vote is advisory.
** Australia has become a "Principal" member since this vote.

Working Group 4 Meeting

The comments accompanying the votes revealed several technical inadequacies as well as some issues on which there is disagreement. Tony Addyman's report "The Pascal Standard: Progress and Problems" (below) discusses several of these issues.

The ISO Working Group on Pascal (WG4) met in Manchester England during June in an effort to resolve these issues and to prepare a second Draft Proposal. (See Pascal News #17, pages 83-84, regarding the origins of WG4.) Attendees were:

| | |
|--------------------------------|-------------------------------|
| Tony Addyman (U.K.) | Pierre Maurice (France) |
| Burkhard Austermeuhl (Germany) | Jim Miner (U.S.A.) |
| Albrecht Biedl (Germany) | Kohei Noshita (Japan) |
| Coen Bron (Netherlands) | Bill Price (U.S.A.) |
| Joe Cointment (U.S.A.) | Helmut Sandmayr (Switzerland) |
| Christian Craff (France) | Karl-Heinz Sarges (Germany) |
| Jacques Farré (France) | Barry Smith (U.S.A.) |
| Charles Haynes (U.S.A.) | Alain Tisserant (France) |
| Ruth Higgins (U.S.A.) | David Williams (Canada) |
| Mike Istinger (Germany) | |

JPC Meeting

A few days after the Manchester meeting, the U.S.A. committee (JPC) met in Portland Oregon. Out of that meeting came the memos from David Jones to WG4 and to the National Bureau of Standards which are reproduced below.

THE PROBLEM

As Tony's article points out, the most difficult problem which the standard now faces is the disagreement over "conformant array parameters". It has been clear to many of us who are deeply involved in the standardization work for some time that this topic could give us much trouble. The extent of the present difficulty became more obvious at the Working Group 4 meeting in June. No conclusion was reached by WG4 regarding conformant array parameters.

The papers by Tony Addyman and David Jones, together with Arthur Sale's article in Pascal News #17 (pages 54-56), provide much insight into the nature of the disagreement.

In favor of conformant arrays

The capability to allow formal array parameters to have "adjustable" index ranges is deemed necessary for the construction of libraries of separately compiled procedures, especially numerical routines. It is argued that failure to standardize now on the form of such a capability will make future standardization impractical due to many incompatible extensions which will be made to provide the capability.

Based on statements made in the WG4 meeting, the following member bodies are likely to vote "No" on a Draft Proposal which does not contain a conformant array feature: Germany, Netherlands, U.K.

Against conformant arrays

Those opposing the inclusion of conformant arrays in the standard argue that the proposal is technically flawed and as a result that its inclusion in the draft will delay the entire standard. (The attachment to David Jones' memo to Working Group 4 contains a technical assessment of the existing proposal.) It is also argued that conformant arrays are not needed more than other extensions which have not been included in the draft proposal.

Based on statements made in the WG4 meeting, member bodies likely to vote "No" if conformant arrays remain are Canada, Japan, U.S.A.

Variations on the theme

Some member bodies have expressed a preference for generalizations of the conformant array feature; Germany, for example, voted "No" partly because value and packed conformant arrays are not allowed.

The U.S.A., which has expressed opposition to conformant arrays on several occasions, proposed a compromise in its vote. The compromise would make conformant arrays optional for an implementation, but with the requirement that any such capability supported by an implementation have the syntax and semantics specified in the standard. Several members of WG4 expressed dislike of this proposal.

CONCLUSION

The standard has been stalled by the disagreement over conformant array parameters. In order to obtain an ISO standard, it is necessary that a compromise of some kind be reached. At this time it is hard to predict what the nature of that compromise will be.

A. M. Addyman

University of Manchester

1. Introduction

Within the International Standards Organization (ISO), there is a work item which is to result in the production of a standard for the programming language Pascal. This work began in ISO in October 1978 as the result of a proposal from the United Kingdom. Work in the United Kingdom began early in 1977. At the time of writing this report, a ballot is taking place within ISO on the acceptability of the first Draft Proposal for the Pascal standard. This report, written immediately after the April 1980 meeting of the U.S. Joint Pascal Committee (X3J9), contains a summary of the substantial progress made to date and discusses the few remaining problems which stand in the way of international agreement.

2. Progress

There is now agreement on the details of all the main areas, although in one or two areas the wording is being improved or drafting errors are being corrected. The areas in which agreement has been reached include:

lexical issues,
scope rules,
type rules,
the syntax and semantics of the statements and declarations,
almost all of the input and output facilities.

Indeed, since there is agreement on so much, it would be better to devote space to the consideration of those issues which have yet to be resolved. Before doing so it should be noted that there is agreement that a standard is needed without delay. This attitude has helped to resolve minor differences of view, since neither party has wanted to risk the standard on such issues.

3. Problems

The outstanding problems will be divided into two categories - minor and major. The major problems are the ones which could substantially delay the production of the standard. The category into which a problem has been placed is necessarily a matter of personal judgement.

3.1 Minor Problems

3.1.1 Alternative Lexical Tokens

The issue is simply that (.and.) should be accepted as alternatives for [and]. There are strong feelings both for and against this. The strongest opposition appears to be from the U.K. The probably outcome will be acceptance of the alternative tokens.

3.1.2 String Truncation on writing

This is a request which involves a change from the current de facto definition. Its advocates cite efficiency, utility and frequent violation of the de facto definition as justification for the change. Opponents argue that

- (a) this is a change and consequently must be rejected, and
- (b) that a truncated representation of the array cannot in any way represent the array.

The possible outcome is unclear, but will undoubtedly be influenced by the U.S.A. position on the major problem (see later).

3.1.3 Tag-fields

There are three loosely related problems in this area:

- (a) a change to prohibit use of tag-fields as var-parameters
- (b) a relaxation of the syntax to replace "type" by "type-identifier"
- (c) a change which would disallow the creation of tag-less variants

Each of these is a change to the de facto definition and as such provoke opposition.

The first is proposed in the interests of promoting the implementation of certain checks desired by the Draft Proposal. It will probably be accepted.

The second change is a change to the syntax to eliminate one of the circumstances in which a type-identifier is necessary and a type definition is unacceptable. The change was strongly opposed at the Pascal Experts meeting in Turin. I expect this opposition to continue..

The third change is proposed on the grounds that its only uses are in implementation dependent "dirty tricks". While this is untrue, the wording of the Draft Proposal suggests that an implementation which performs checks in this area will have to provide a tag-field if the programmer does not. The only justification for this feature which is within the proposed standard is associated with the saving of storage space for variables. Since a large number of implementations incorporate this restriction, which is aimed at improving security, there is a possibility that it will be accepted.

3.1.4 New and Dispose

There is a form of these standard procedures which may be used to reduce the storage requirements of a program. The use of this feature may lead to errors which are difficult for the programmer to detect, furthermore an implementation can detect such errors only by using additional storage! There is pressure to have this form of new and dispose removed.

Given the increasing usage of Pascal on microcomputers it is likely that the definition of new will be unchanged. There is a much stronger case for changing dispose since most implementations maintain enough information to ensure the security of the heap. The final irony is that the Draft Proposal identifies two error conditions which can only be detected by maintaining enough information to make this form of dispose redundant.

3.1.5 The Rest

There are a number of minor problems which have been raised by various parties and subsequently dropped e.g. the U.K. Pascal group has expressed a desire to remove pack, unpack and page from the language; other European groups have requested extensions to the case-statement and changes to the syntax of a block etc. There is a danger that decisions to make changes in any of the areas cited above may provoke more requests.

3.2 The Major Problem

3.2.1 Introduction

There appears to be only one substantial problem which may prevent agreement being reached on a Pascal standard. This is the problem of adjustable array parameters.

In the de facto definition of Pascal, a parameter of a procedure must have a specific type which in the case of an array will include a specification of the bounds of the array. This is viewed by many people as an unacceptable restriction in a language that is being proposed for international standardisation. As a result of the comments received on the document ISO/TC97/SC5 N462, the U.K. Pascal group resolved to introduce into the draft a minimal facility which would address the problem. The U.K. solution provided for var-parameters but not value parameters and also excluded packed arrays. The proposal from the U.K. has received objections on two counts:

- (a) it is a change to the language - in particular, more work should be done on the details of such a feature before it is added to the language.
- (b) the feature is too restrictive - value parameters and/or packed arrays should also be allowed.

To clarify matters the arguments which support the three positions will be presented separately.

3.2.2 In favour of the Draft Proposal

1. There is great demand for the feature to be added to the language, and those making the demands have not specified any particular syntax or semantics. Those supporting the addition include Prof. Hoare and Prof. Wirth.
2. In the interests of portability the feature should be required in any implementation of a Pascal processor.
3. There are no technical difficulties with implementing the feature in the Draft Proposal since all the "run-time" operations that are required already exist.
4. Requiring value adjustable array parameters has an impact on the procedure calling mechanism - the amount of space required by a procedure cannot always be determined at compile-time. There is concern that there may be existing implementations which rely on such a determination at compile-time and which would therefore be destroyed by the introduction of value adjustable array parameters.
5. Requiring packed adjustable array parameters places increased overheads on an implementation which packs multidimensional arrays. Such overheads may result in a reduction in the extent to which a packing request is heeded.
6. If action is not taken at this time a number of vendors will surely introduce incompatible extensions to fulfill this obvious need. Such action would effectively prevent future standardisation of this feature.
7. Of all the requests for extensions received during the comment period on ISO/TC97/SC5 N462, this is the only one which adds to the functionality of the language. All the other requests addressed issues of convenience and/or efficiency.

3.2.3 In favour of a less restrictive proposal

1. All the above arguments are accepted apart from 4 and 5.
2. Those in favour of value adjustable array parameters claim that no existing implementations will be embarrassed and claim (correctly) that there are no technical problems.
3. Those in favour of packing fall into two distinct groups:
 - (a) those who believe that there are no implementation problems and that in the interests of generality the restriction should be removed.
 - (b) those who wish to use string constants as actual parameters. They appear to need both value (since a constant is not permitted as an actual var-parameter) and packed (since the Draft Proposal specifies that string constants are of a packed type). An alternative solution to this problem is to change the specification so that the type of string constant is context dependent (as is the case for set-constructors) in which case a string constant could also be a constant of an unpacked type. The same proposal also requires that those operators which apply to packed character arrays also apply to unpacked character arrays. This has the considerable merit of removing the only case in which

the prefix "packed" is used for reasons other than storage reduction.

3.2.4 In favour of the feature being optional

This is a view expressed by the U.S.A. Pascal committee (X3J9).

1. A language designer must not add to a language any feature that is not very well understood, that has not been implemented, or that has not been used in real programs. The proposed adjustable array parameter feature is just such a feature. This feature should be widely implemented and used before it is incorporated into a standard for Pascal.
2. By placing the proposal in an appendix entitled "Recommended Extension" we derive the benefit of having the opportunity to implement the feature before casting it in concrete.
3. Implementors who add a feature which performs this function are required to comply with the recommended extension. This will make compatibility with any future extended Pascal more likely without foregoing the possibility of learning more about the feature in the interim.

3.2.5 The Probable Outcome

There is considerable pressure from several ISO member bodies (the U.K. excepted) to remove the restrictions which the Draft Proposal incorporates relating to adjustable array parameters. The probable conclusion will be to permit value but prohibit packed and at the same time introduce the changes described above relating to the operations etc. available for character arrays. Unfortunately the proposal from the U.S.A. for removal of the feature to an appendix is likely to be opposed strongly by one or more member bodies. This view is based on the comments received from other ISO member bodies since the April X3J9 meeting. The strength of support for removal of the restrictions is unlikely to be compatible everywhere with a willingness to accept less than is contained in the Draft Proposal. One possible solution would be for X3J9 to accept the feature as part of the language. At this stage this does not seem likely since the X3J9 position was taken for largely non-technical reasons. This observation is justified as follows:


1. X3J9 is requesting changes to the existing de facto definition while objecting to this extension.
2. X3J9 is currently soliciting extension proposals - it is unlikely that any such proposals will be acceptable by their criteria in 3.2.4. 1 above.
3. To promote portability and improve the probability of agreement in a future standard, the extension must be implemented as specified in the appendix. An implementor may only experiment with an alternative if the recommended extension is also implemented. This adds no new freedom to the implementor since language extensions are not prohibited by the Draft Proposal!
4. X3J9 also supports the removal of some of the restrictions mentioned earlier.

3.3 Conclusions

The meeting of ISO/TC97/SC5/WG4(Pascal) to be held in June 1980 will be a crucial one. There is pressure within the United States to move on to consideration of extensions - this is being delayed by the current activities. In the United Kingdom there is a government funded project to create a validating mechanism for Pascal. This clearly needs a standard to validate against. Significant progress is required on this project by April 1981!

A negative vote by any member body on the second Draft Proposal, later this year, will probably terminate the international standardisation effort because it will introduce delays which are unacceptable to one or more member bodies who will have little alternative but to produce national standards instead.

There is a real danger that one of more ISO member bodies will find the removal of adjustable array parameters to an appendix as unacceptable as the United States finds their inclusion in the body of the standard.

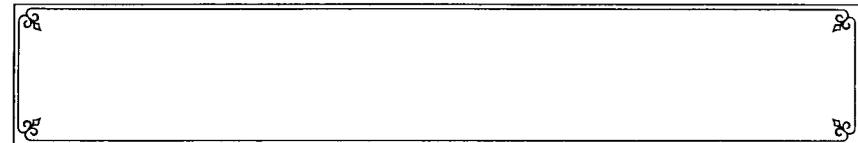

U. S. concerns on Pascal Standardization

27 June 1980

MEMO

To: ISO/TC97/SC5/WG4
Re: U. S. concerns on Pascal Standardization With Respect to the
Conformant-array Extensions

The Joint X3J9/IEEE Pascal Standards Committee has resolved to express its concern that the issue of conformant array parameters may significantly delay the acceptance of the draft proposed standard for Pascal as an international standard. The committee is anxious to explore any option which will lead to a solution of the conflict over this issue acceptable to all member bodies of SC5.

As you know, the US member body of ISO TC97/SC 5 voted against the acceptance of the first draft proposal, on the grounds that the conformant array feature should be described in an appendix to the standard. This position was a compromise offered in the hope that it would be acceptable to the other member bodies of SC 5 and thereby an international consensus could be quickly achieved. The position did not, in fact, reflect the true sentiment of the JPC, as expressed in a number of formal and informal votes, which was that a conformant array feature should not be included in the current standard for Pascal. In the beginning there was no proposal available to evaluate technically, and the committee's view was based on strategic considerations. These were that the introduction of a new and largely untried feature at such a late date would introduce technical problems which could not be resolved in time to avoid delaying the acceptance of the standard. This has in fact turned out to be the case, since the first proposal for a conformant array feature was sufficiently technically flawed to justify its replacement by a quite different proposal. There are still major technical objections to the latter so that the view of the JPC on conformant arrays remains unchanged, although it is now based on technical considerations. These are described in the attachment (which was accepted unanimously).

This committee understands and shares the view that the conformant array feature attempts to solve a significant technical deficiency in Pascal. However, it feels that the technical objections should be resolved before such a feature is included in an International or American National Standard. The committee believes that this leaves two possible courses of action if a failure to agree on an International standard is to be avoided. The first is that a major international effort through the Working Group must be mounted to prepare a technically sound proposal. The committee believes that this is likely to require yet another complete revision of the proposed feature. Sufficient time must be made available for such work to be completed and properly evaluated. The second approach is that we should proceed as quickly as possible to standardize the language at a level at which it has been widely used for a number of years.

It is clear that the second offers the quickest route to a standard and we strongly recommend that it be adopted. However, we further recommend that the effort identified in the first approach be simultaneously initiated and that an acceptable conformant array proposal should be defined and included in a subsequent standard for Pascal as soon as possible.

Yours sincerely,

D. T. Jones
International Representative
Joint ANSI/X3J9 - IEEE Pascal Committee

Enclosure

Attachment: Conformant Array Ad hoc Task Group Final Report
U.S. Objections to Conformant Array Extension

1.0 Overview and general problems

The U.S. Joint Pascal Committee (X3J9) created an ad hoc task group to investigate the conformant array extension appearing in JPC/80-161 (Working draft/6) (6.6.3.1). This report together with JPC international liaison David Jones' cover letter to the international working group (WG4) is the result of the task group's investigation. Contributing members of the task group included Bob Dietrich, Hellmut Golde, Steve Hiebert, Ruth Higgins, Al Hoffman, Leslie Klein, Bob Lange, Jim Miner, Bill Price, Sam Roberts, Tom Rudkin, Larry Weber (chairperson), and Tom Wilcox.

1.1 Lack of implementation experience

The current proposal has no widely known implementations. Various portions of the extension have been implemented in different compilers, but the group of features proposed here have never been combined together, except on paper. Furthermore, the implementations of the various parts of the extension have not (of course!) been in the context of the proposed standard. Since this is a new feature to the language, the introduction of this extension in the standard document is especially distressing.

1.2 Large change to text of standard

The conformant-array extension requires a large amount of text in the standard in order to describe it. Moreover, it requires modifications to sections outside of section 6.6.3 on parameters. In other words, the extension interacts -- at least in its description -- with many other parts of the language. For example, in section 6.7.1 the alternative "bound-identifier" has to be added

This means that the extension is major, with wide impact on the language. This is especially unfortunate in view of the fact that it only provides a single capability -- that of array parameters with adjustable bounds. A broader capability, might not require a significantly larger description.

1.3 Conformant-array concept not defined

It is of the essence of the Pascal language, and its principal distinguishing characteristic, that it is "based on certain fundamental concepts clearly and naturally reflected by the language" (page 1, section 0, forward to the Draft ISO/DP 7185). It is difficult, at best, to

identify a fundamental concept that this extension is to support. The best approximation yet suggested is the adjustability of the bounds of a scalar-type used as the index-type of an array-type under certain circumstances of parameter usage. Inasmuch as this concept is founded on at least five identifiable concepts, it is difficult to see how it may be considered fundamental.

This absence of fundamental underlying abstraction is foreign to the nature of the language. This absence leads inexorably to user confusion and to language-designer confusion. The user is not provided a concept on which to base his understanding; the designer, likewise, is given no guidance in his language design. Since user experience is lacking, no evidence exists from which to draw any conclusions with respect to the lack of user understandability. However, the lack of guidance to the language designer is quite nicely evident from the volume of technical objection: the most acute examples are the dilemmas of packing and of value-parameters.

2.0 Problems with existing proposal

2.1 Set of types that may have to conform is unrestricted

The conformant-array extension provides no way to identify, at the point of declaration, the array types that may have to conform to some conformant-array parameter. Consequently, an implementation must ensure, a priori, that ALL array types can be handled correctly by the implementation of the conformant-array parameter extension. Hence, a user may have to endure severe implementation inefficiencies even though he does not use the conformant-array parameter extension. For example, an implementation of packed conformant-array parameters (an almost irresistible evolution of the present extension) may make many of the possible forms of data packing totally impractical. A solution that is integrated with the type naming mechanism would alleviate this problem.

2.2 Structural Compatibility

One of the fundamental clarifying decisions made in developing the draft standard from Jensen and Wirth was the rejection of so-called "structural type-compatibility" in favor of the more natural "name compatibility" (or a variation thereon). Such decisions have had a profound effect on the resulting language; it is important that such principles be applied consistently throughout the language.

Unfortunately, two areas of the existing (Jensen and Wirth) language resisted consistent application of "name compatibility": set-types and string-types. Both of these

problems are directly attributable to the existence of inadequately typed value designators (i.e., character-string constants and set-constructors). It was deemed necessary to violate "name compatibility" in these two cases in order to avoid introducing new (and incompatible) language features.

The conformant-array extensions introduced in N510 and in DP 7185 both violate the underlying principle of "name-compatibility"; we have seen no attempt to justify this violation. This is inexcusable in the absence of problems of upward-compatibility, very simply because conformant-arrays are an extension.

One practical effect of this unnatural regression to structural-compatibility, as discussed elsewhere in more detail, is the difficulty encountered in extending the conformant-array capability to allow multi-dimensional packed arrays.

2.3 Parameter List Congruency

In the comments from the French member body (p.3, 6.6.3.6), they note that "the parameter lists (x,y:t) and (x:t, y:t) seem to be not congruent" and that this is the only part of the language where these two notations are not entirely equivalent. It is a correct observation that these are not congruent. However, given the current form of the conformant-array proposal, this surprising and aesthetically unpleasant inconsistency is absolutely necessary. If the two parameter list forms were congruent (as in N510), then the following example would be a legal program fragment:

```
type t = integer;
proc p1(var f1,f2: array[i..j: t] of u);
  begin f1:= f2 end; {end - p1}

proc p2 (proc fp(var f1: array[i1..j1:t] of u;
  var f2: array[i2..j2:t] of u));
  var a: array[1..2] of u;
  b: array[1..3] of u;

  begin fp(a,b) end; {end - p2}

begin p2(p1) end;
```

It is impossible to know at compile time that the assignment (f1:= f2) is an error. To remove the necessity of this run-time check, a seemingly unrelated aspect of the language had to be altered. The alteration has been recognized as undesirable and the reason for it was certainly not obvious. It took some time to detect the effect of conformant-array-schemas on parameter-list congruency. In addition, there may be other apparently unrelated aspects

that, as yet, have not been discovered.

2.4 Need to name a conformant array schema

There is no construct to allow the use of an identifier to denote a conformant array schema:

```
TYPE varray = array[i..j: integer] of integer;
:
:
PROCEDURE p(var param: varray);
```

The lack of this construct makes the proposed conformant array schema weaker, due to considerations of consistency and user convenience.

Before proceeding, it must be noted that the naming construct above must be accompanied some means of distinguishing the array bounds "[i..j]" for each individual usage. It is not clear that the currently proposed conformant array extension allows such a capability: this is a general problem in itself as well as a limitation on extensibility (see section 3.5).

The first objection to the proposed conformant array extension is the bulkiness of the construct. The parameter list of a procedure or function is frequently placed on one line. The use of a conformant array schema makes this virtually impossible when more than one parameter exists. This and the added user cost of retyping the schema become significant when the same schema is used over and over again, as, say, in a library of mathematical routines.

When one conformant array uses another, in the following manner, the lack of an identifier becomes a clear oversight in the language:

```
procedure p(var a: array[lowa..higha: atype]
  of arecord;
  var b,c: array[xlow..xhigh: integer;
  clow..chigh: color] of
  array [lowa2..higha2: atype]
  of arecord);
```

Here it is desirable that the type of "a" in the type of the components of "b" and "c" to be the same.

The unfortunate consequence of adding the inadequately conceived conformant array schema to Pascal is a reduction in the prime desirabilities of convenience of usage and clarity of the printed program.

The lack of an identifier construct for conformant array schemas results in user, language, and implementation inconsistencies. Except for procedure and function parameters, the conformant array schema is the only construct in the parameter list that is not a single word. To new students of the language, it will always appear inconsistent. And, since the parsing of conformant array schemas is so different from other parameter-type-identifiers, it becomes an exception case, resulting in added complexity in the compiler.

The proposed conformant array schema is also shortsighted in that it does not permit the use of a conformant array schema as a part of a record, to be passed as a parameter. For example, many programs make use of dynamic "strings" implemented as records, i.e.

```
type string = record
    length: 0..80;
    chars: array[1..80] of char
end;
```

for a dynamic "string" of maximum length 80. Supposing it were necessary to write a string-handling routine to handle records with differing maximum lengths, one could, with the help of a schema label, construct the following:

```
type natural = 1..maxint;
dynamicarray = array[i..j: natural] of char;
string = record
    length: integer;
    chars: dynamicarray
end;
:
:
procedure concat (var a,b,c: string );
```

This concise construct is absolutely unimplementable under the current proposal. On the other hand, the above type of construct could lead to some interesting extensions (not that they should be dealt with here).

Finally, note that making a change to a conformant array schema, used all over a program, is much more involved than changing the definition of a single conformant array schema identifier.

2.4 Separator ";"

The abbreviated form for contained conformant-array-schema introduces the character ";" as an abbreviation for the sequence "]" "of" "array" "[" (6.6.3.1), thus allowing the form

```
array[u..v:T1; j..k:T2] of T3
```

to be equivalent to

```
array[u..v:T1] of array[j..k:T2] of T3 .
```

This conflicts with the use of the character "," to express a similar equivalence for array types (6.4.3.2), where

```
array [T4, T5] of T6
```

is equivalent to

```
array [T4] of array [T5] of T6
```

One might therefore argue that for uniformity and possibly as an aid in compiler error recovery, the character "," should be used in the conformant-array extension.

However, there is unresolved disagreement as to whether the separator should be a comma or a semicolon. The existence of this disagreement demonstrates that the nature of the object to be separated is not well understood nor well specified.

2.5 Required Runtime checking of types

The proposed scheme specifies that the type of the formal parameter is the same as the type of the actual parameter. This presents serious difficulties when a conformant parameter is further used as an actual parameter, as illustrated in the following example.

```
program example;
type arraytype = array[1..10] of integer;
var
    a : arraytype;
    b : array[1..10] of integer;
    c : array[1..11] of integer;
procedure simplearray (var a:arraytype);
begin end;
procedure fancyarray(var a:array[m..n:integer]
                    of integer);
begin
    simplearray(a)
end;
begin
    {main program}
    fancyarray(a);    {legal}
    fancyarray(b);    {illegal - name incompatible}
    fancyarray(c);    {illegal- structure incompatible}
end.
```

Another illustration of runtime type checking is shown in the following example.

```
type
  natural = 0..maxint;
procedure pl(var b:array[i..j:natural] of u);
  begin end;
procedure p2(var a:array[i..j:integer] of u);
  begin pl(a) end;
```

In this example, the passing of the variable "a" to "pl" may or may not be valid, depending on the actual parameter passed to "p2"

This problem is not addressed by the UK Member Body comments on DP 7815.

3.0 Limitations of existing proposal

The following items are brief descriptions of features that could someday be considered as possible extensions to the language. An evaluation and rationale for their desirability has not been completed at this time. The process of including these is impacted by the current definition of the conformant array extension. It is felt that unifying fundamental abstractions must be developed to cover the total set of any newly defined features.

3.1 Leading index types

Only leading index types of conformant-array-schemata are adjustable. Thus,

array[j..k:T1] of array[T2] of T3

is acceptable, while

array[T2] of array[j..k:T1] of T3

is not (6.6.3.1). This introduces an asymmetry into the definition. While a relaxation of this restriction does not offer any additional functionality, it would allow a more natural expression of certain relationships between index types.

3.2 The lack of packing

The conformant-array extension, as defined in Working

Draft/6, restricts the allowable actual parameters to arrays not having the attribute "packed". This restriction eliminates the direct use of conformant arrays for string handling under the current limitation that the only arrays of char-type that may be compared, written to files or declared as constants are those arrays having the attribute "packed". This particular problem could be corrected by removing the "packed" restriction on string type although care would still be required on the part of the programmer to use only arrays with lower bounds of one and run-time checks would be required to ensure this care had been taken. Even if this string-type problem were resolved, the lack of orthogonality contradicts the Jensen-Wirth Report in which the obvious intent is that packed and unpacked arrays be generally equivalent except for the possible differences in storage requirements.

3.3 Value conformant-arrays

Introduction of a value parameter as part of the conformant-array extension is a natural addition, and there seem to be good reasons to consider this aspect of the conformant-array parameter. However, if this feature were to be added to the extension, then this is the first instance of a case where the size of the activation record is not known during compilation. The unknown size of the activation record causes a problem in an implementation that relies on knowing the activation record size in order to handle activation stack overflow. This is not to say that efficient implementations are impossible, but the two situations must be treated efficiently by compilers.

3.4 Conformant-arrays and bounds limitations

The conformant-array extension is not sufficiently general nor extensible: it does not provide the ability to fix either the lower or upper bound of a given index specification. Nor does it allow the user to equate the extent of one index specification with the extent of another, be it within the same conformant-array parameter or a different conformant-array parameter. This deficiency results in increased time and space complexity and hinders compiler optimization. Moreover, it requires an author to either validate one or more conditions or trust the caller. The former introduces further deterioration of efficiency while the latter is inconsistent with the strongly-typed nature of Pascal. In addition, this lack in the conformant-array extension is in conflict with one of its primary uses: the construction of independent array manipulation routines. For example, possible uses of conformant-array parameters include general matrix multiplication and inversion routines where one would like to place restrictions on the bounds and interrelationship

between index types of the actual parameters.

3.5 Conformant scalar-types

The conformant-array extension addresses only the role of a scalar-type as an index-type of an array-type parameter. It ignores the many other roles where it is desirable to conform a scalar-type parameter. A few such roles where such conformance might be desirable are:

1. as the type of a parameter;
2. as the base type of a set;
3. as the component type of an array;
4. as the type of a field;
5. as the index-type of an array used as the type of a field.



TO: National Bureau of Standards

FROM: David Jones
X3J9 International Liaison

SUBJECT: Report by A.M. Addyman

The Joint ANSI/X3J9 - IEEE Pascal Standards Committee (JPC) has received a copy of a report, "The Pascal Standard : Progress and Problems," written by A.M. Addyman of the University of Manchester. This report, hereafter referred to as JPC/80-164, presents an interpretation of the current impasse in the Pascal standardization effort with which JPC does not agree. I have been charged, as the JPC International Liaison, to present the committee's point of view.

The primary issue over which Mr. Addyman and the committee disagree is discussed in sections 3.2.5 and 3.3 of JPC/80-164, although JPC takes issue with remarks in other sections. Before addressing the comments specifically, however, I shall present a summary of JPC's point of view.

The true sentiment of the committee is that a conformant array parameter feature should not be included in the version of Pascal being standardized through the current effort. This view has been repeatedly documented, by both formal and informal resolutions passed either unanimously or by large majorities, beginning with the first time JPC became aware that the BSI group was considering the introduction of this feature. Initially, the opposition was based on strategic grounds (i.e., there was no proposal to formally evaluate). These were that the delay introduced by requiring a technical evaluation prior to acceptance of the feature would substantially postpone the adoption of a standard. The JPC does believe that the conformant array extension attempts to solve a real problem that will have to be eventually solved, and that finding such a solution is a matter of urgency.

The pessimism of JPC was justified in that the initial proposal offered by BSI was so flawed that it was withdrawn and replaced by an entirely new proposal at the Experts Group Meeting in Turin in November 1979. It is the position of JPC that this second proposal still contains technical errors and deficiencies sufficiently grave that yet another complete revision of the proposal will probably be required before an acceptable solution

to the problem is found. Consequently, the strategic objections remain, but are now substantiated by technical considerations.

Nevertheless, when the committee voted in April, 1980 to recommend that the U.S. position should be to disapprove the draft proposal identifying conformant array parameters as being the only issue, it only required that this feature be removed to an appendix so that its implementation could be made optional. This represented a major compromise which, from the JPC point of view, was far from the real sentiment requiring that the feature be removed entirely from the proposal.

JPC is convinced that it is in the best interests of the Pascal User Community that any revision or extension to the language be supported by sound technical grounds, and that it is better to take the time to do it correctly or to accept a standard without conformant array parameters than to accept a technically inadequate proposal merely because it is timely to do so.

As far as the actual comments in JPC/80-164 are concerned, the remark in section 3.3.2 on support by Professors Hoare and Wirth should be qualified by the results of the discussions members of JPC had with them before and during the April meeting, of which Mr. Addyman was aware. Both indicated that the U. S. compromise was preferable to delaying the standard, and Professor Hoare himself was the source of this method of introducing this extension. The substitution of the word "standardizer" for "designer" in 3.2.4, paragraph 1, line 1, would accurately reflect the U. S. position. Without the substitution, it does not. Thus 3.2.5, paragraph 2, is also misleading. The use of the term "(correctly)" in 3.2.3, paragraph 2, is difficult to substantiate. The JPC is particularly at odds with the position that non-technical reasons were the justification for its disapproval. We cannot assume Mr. Addyman is referring to our strategic reasons because these reasons have a technical basis. Even in the beginning, the basic issues were technical although they could not yet be identified. Consequently, Mr. Addyman's remark must be construed as implying a political basis for the JPC's position. This is certainly not the case and we disagree with Mr. Addyman's justification for his point of view as expressed in 3.2.5, paragraphs numbered 1 to 4. The following numbered paragraphs discuss our corresponding disagreement:

1. There have been many changes to the de facto definition of Pascal which have not been regarded as extensions and have been the subject of wide implementation and use. This does not apply to the feature in question, reflecting consistency in JPC's position in this regard.

2. It is a subjective opinion that the criteria of 3.2.4, item 1, would preclude other extensions. It is stated quite clearly within the proposed standard that implementation dependent features are allowed, and that by implication a user is free to provide one or more versions of any given feature. By this means, an extension could become widely implemented before acceptance in a standard. In particular, an Appendix could be created for such a feature for the reasons in 3.2.4, paragraph 2, of JPC/80-164.

3. The JPC would prefer that the conformant-array extension be removed entirely from this standard for technical reasons. However, we recognized the claims of the other member bodies that they require this capability in the language. Therefore, the JPC proposed that the extension be in an appendix to address our concerns and we proposed that if the extension were implemented, it was to be implemented in the format specified to encourage acceptance by the other member countries. Since it is our preference to remove the extension entirely, it would be consistent with our position to soften the wording from a requirement to a recommendation.

4. JPC does indeed support the removal of these restrictions, but feels that the technical issues raised by doing so would introduce an unjustifiable delay into the standardization process.

Addressing section 3.3, it is the view of JPC that the position taken by Mr. Addyman (i.e., a negative vote would terminate the standardization process) is unduly pessimistic. In addition, this statement represents unwarranted pressure on the U.S. and the other two countries which voted against the conformant array extension due to significant technical deficiencies.

Implementation Notes

Editor's comments

Well, it was bound to happen. My section of issue #17 got scrambled. The right half of page 88 shouldn't have appeared at all, the Zilog Z-80 reports became recursive, and the machine-dependent section was all out of sequence. My sincerest apologies go to Arthur Sale, whose letter on the Burroughs B5700/7700 implementation was dropped completely, and to my co-editor Greg Marshall, whose hard work on the One-Purpose Coupon went without credit. Things should be straightened out with this issue (I hope).

Just to add to the overall confusion, I've changed my address and phone number within Tektronix. This move is not intended to make it more difficult to reach me. Mail to my old address will be forwarded for the next few years, and if my phone rings more than four times now, the secretary (Eddie) should answer (theoretically). Here's my new address and phone:

Bob Dietrich
MS 92-134
Tektronix, Inc. phone: (503) 645-6464 ext 1727
P.O. Box 500
Beaverton, Oregon 97077
U.S.A.

For those of you that are still trying to convince other people that Pascal has 'arrived', I put together this short list of companies. It consists solely of those companies that both manufacture processors and have announced a version of Pascal on one or more of their products. Hopefully I have not left out anyone. Due to my own lack of information only U.S. companies are listed.

American Microsystems
Basic Timesharing
Control Data Corporation
Data General
Digital Equipment Corporation
General Automation
Hewlett-Packard
Honeywell
IBM
Intel
Motorola
National Semiconductor
Texas Instruments
Three Rivers Computer
Varian division of Sperry Univac
Western Digital
Zilog

Of course, this list does not include the many more companies that supply Pascals for the xyz computer. Often (and why not?) these companies do a much better job than the companies that actually build the processors. You can draw your own conclusions from this list.

Validation Suite Reports



The University of Tasmania

Postal Address: Box 252C, G.P.O., Hobart, Tasmania, Australia 7001

Telephone: 23 0561. Cables 'Tasuni' Telex: 58150 UNTAS

IN REPLY PLEASE QUOTE

FILE NO

IF TELEPHONING OR CALLING

ASK FOR

14th March, 1980

The Editor,
Pascal News.

Validation Suite Report

This report to readers of *Pascal News* is intended to let everyone know of our intentions and plans. The demand for the validation package and response to it has almost swamped our capability of replying.

The current version 2.2 of the Validation Suite has been distributed to about 150 organizations or individuals, not counting the several thousands reached via *Pascal News*. As an indicator, the distribution list of our US distributor Rich Cichelli, is enclosed. Some suppliers are using the Validation Suite results in their advertising, and many are using it as a development tool. I have received a number of comparative reports, and have noticed a healthy competition to achieve 100% on the conformance/deviance tests.

We have almost completed an update to Version 2.3, which will correct the known errors in Version 2.2, and will include a few tests which were accidentally omitted in the first release. Unfortunately, even with the greatest care we could muster, several erroneous programs slipped through into the release of 2.2, and a few had features which caused them to fail on some processors for unrelated reasons. Version 2.3 is the response to such problems. However, it is still derived from the version of the Draft Standard printed in *Pascal News* and *IEEE Computer*, and known in ISO circles as ISO/TC97/SC5-N462.

As soon as this is tested and released, we begin work on updating the whole package to the ISO Draft Standard now being circulated for voting. I estimate that this will take us about 2-3 months, for completely checking over 300 programs is non-trivial, and the insertions will require to be carefully drafted. The sources of change are primarily due to:

- (i) areas in the earlier draft standards that were poorly drafted now being more precisely defined,
- (ii) areas in the draft standard which have been altered, usually because N462 contained some mistake or ill-conceived change,
- (iii) field experience with the package showing us weak spots in its attack strategies on compilers.

I should like to thank all those who have sent Brian, Rich or me copies of their results, or better still concise summaries and comments for the future. Your praise and criticisms help sustain us through a quite difficult piece of software engineering. Indeed we now realize that we should perhaps have written ourselves more tools at the start to carry through what I think to be a most significant piece of change in the software industry, and I am very much aware just how many contributions have gone up to make this effort.

May I simply continue to urge readers of Pascal News to keep on pushing the view that "correct is right" (with apologies to T.H.White), and to refuse to accept second-best.



Arthur Sale,
Professor of Information Science

PASCAL VALIDATION SUITE USERS

| | |
|---|---|
| Oregon Software Inc. Portland, Oregon 97201 | Systems Engineering Labs Ft. Lauderdale, Fla 33310 |
| Honeywell PMSC Phoenix, Arizona 85029 | General Automation Inc. Anaheim, Calif 92805 |
| Rational Data Systems Inc. New York City, NY 10019 | University of California at Santa Barbara Santa Barbara, Calif 93106 |
| Advanced Computer Techniques Arlington, Virginia 22209 | Texas Instruments Dallas, Texas 75222 |
| Prime Computer Framingham, Mass 01701 | National Semiconductor Corporation Santa Clara, Calif 95051 |
| Hewlett Packard Palo Alto, Calif 94304 | Boeing Co. Seattle, Washington 98124 |

~~Terak~~ Corporation
Scottsdale, Arizona 85254

University of Waterloo
Waterloo, Ontario, Canada

Sperry Univac
Blue Bell, Pa. 19424

Perkin Elmer Corporation
Tinton Falls, NJ 07724

Boston Systems Office Inc.
Waltham, Mass 02154

Intel Corporation
Santa Clara, Calif 95051

General Research Corporation
Santa Barbara, Calif 93111

University of Minnesota
Minneapolis, Minn 55455

University of California at San Diego
La Jolla, Calif 92093

Intermetrics Inc.
Cambridge, Mass 02138

University of British Columbia
Vancouver, British Columbia, Canada

Virginia Polytechnical Institute & State University
Blacksburg, Va 24061

Digital Equipment Corporation
Tewksbury, Mass 01876

Philips Laboratories
Briarcliff Manor, NY 10510

Honeywell MM12-3187
Minneapolis, Minn 55408

RCA-MSRD 127-302
Moorestown, NJ 08057

Boeing Co.
Seattle, Washington 98124

David Intersimone
Granada Hills, Calif 91344

Comshare Inc.
Ann Arbor, Michigan 48104

OCLC Inc.
Columbus, Ohio 43212

TRW CS&S
San Diego, Calif 92121

Medical Data Consultants
San Bernardino, Calif 92408

University of California at San Francisco
San Francisco, Calif 94143

Timeshare
Hanover, NH 03755

Fairchild Camera & Instrument Corp.
Mountainview, Calif 94042

NCR Corporation
Copenhagen, Denmark

Process Computer Systems
Saline, Mich 48176

Vrije Universiteit
Amsterdam, The Netherlands

Scientific Computer Services
Glenview, Ill 60025

Burroughs Corporation
Goleta, Calif 93017

Business Application Systems Inc.
Raleigh, NC 27607


University of Waterloo
Waterloo, Ontario, Canada N2L 3G1

Language Resources
Boulder, Colorado 80302

Jet Propulsion Lab
Pasadena, Calif 91103

Michigan State University
East Lansing, Mich 48824

| | | | |
|--|--|--|---|
| Beckman Instruments Fullerton, Calif 92635 | Whitesmiths Ltd New York, NY 10024 | University of Alabama in Birmingham Birmingham, Alabama 35294 | Motorola Inc. Austin, Texas 78721 |
| University of California Los Alamos, NM 87545 | Sperry Univac St. Paul, Minn 55116 | NASA Hampton, Virginia 23601 | Stanford Linear Accelerator Center Stanford, Calif 94305 |
| Ford Motor Co. Dearborn, Mich 48121 | University of Guelph Guelph, Ontario, Canada N1G 2W1 | Carnegie Mellon University Pittsburgh, Pa. 15213 | Centre de Calcul EPFL Lausanne Switzerland |
| Online Systems Inc. Pittsburgh, Pa. 15229 | MacDonald Dettwiler & Associates Richmond, British Columbia, Canada V6X 2Z9 | Digital Technology Inc. Champaign, Ill 61820 | Sperry Univac Blue Bell, Pa. 19424 |
| Data General Corp. Westboro, Mass 01581 | The Medlab Co. Salt Lake City, Utah 84115 | System Development Corp. Santa Monica, Calif 90406 | Procter & Gamble Co. Cincinnati, Ohio 45201 |
| Northrop Research & Technology Center Palos Verdes, Calif 90274 | University of Illinois Urbana, Ill 61801 | IBM Corp. San Jose, Calif 95150 | Compagnie Belge Burroughs Herstal Belgium |
| Motorola Microsystems Mesa, Arizona 85202 | University of Scranton Scranton, Pa. 18510 | RUNIT Trondheim, Norway | GENRAD Futuredata Los Angeles, Calif 90045 |
| TRW DSSG Redondo Beach, Calif 90278 | BTI Computer Systems Inc. Sunnyvale, Calif 94086 | University of Iowa Iowa City, Iowa 52244 | Wayne Catlett Santa Ana, Calif 92707 |
| GTE Automatic Electric Laboratories Inc Northlake, Ill 60164 | Modcomp Ft. Lauderdale, Fla 33310 | Bobs Software Systems Austin, Texas 78745 | Western Digital Corp. Newport Beach, Calif 92663 |
| Tektronix Inc. Beaverton, Oregon 97077 | California Software Products Inc. Santa Ana, Calif 92701 | General Electric Co. Fairfield, Conn 06431 | Three Rivers Computer Corp. Pittsburgh, Pa. 15213 |
| Enertec Inc. Lansdale, Pa. 19446 | Control Data Corp. La Jolla, Calif 92037 | Viking Computer Corp Lexington, Mass 02173 | Singer-Librascope Glendale, Calif 91201 |
| Arthur A. Collins Inc. Dallas, Texas 75240 | Jet Propulsion Laboratory Pasadena, Calif 91103 | Cogitronics Corp. Portland, Ore 97229 | Computer Translation Inc. Provo, Utah 84602 |
| RCA Laboratories Princeton, NJ 08540 | California State University & Colleges Los Angeles, Calif 90036 | Western Michigan University Kalamazoo, Mich 49008 | NCR Corp. San Diego, Calif 92127 |
| Renaissance Systems Inc. San Diego, Calif 92121 | Computer Sales & Leasing Denver, Colorado 80222 | Sperry Division Headquarters Great Neck, NY 11020 | Westinghouse Electric Corp. Pittsburgh, Pa. 15238 |
| University of Western Ontario London, Ontario Canada N6A 5B9 | GTE Sylvania Mountain View, Calif 94042 | Lambda Technology New York, NY 10017 | Chemical Systems Division Sunnyvale, Calif 94086 |
| Perkin Elmer Computer Systems Division Tinton Falls, NJ 07724 | Amherst College Amherst, Mass 01002 | Rhintek Inc. Columbia, Md. 21045 | |
| Burroughs Corp. Pasadena, Calif 91109 | Gould Inc. Andover, Mass 01810 | Tymshare Inc. Cupertino, Calif 95014 | |
| University of Michigan Ann Arbor, Mich 48109 | Technical Analysis Corp. Atlanta, Georgia 30342 | | |

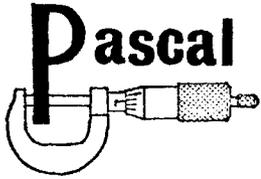

THE PASCAL VALIDATION PROJECT

Department of Information Science
University of Tasmania
GPO Box 252C,
HOBART, Tasmania; 7001



Thank you for your support of our effort; we have over 150 subscribers now and the activity is certainly paying off in terms of quality of software and convenience to users. Best wishes for your future work.

A.H.J. Sale

Professor A.H.J. Sale

Validation Newsletter No 1

1980 March 28

Some time ago you acquired a version of the Pascal Validation Suite, either from us or from Rich Cichelli in the USA or from Brian Wichmann in the UK. If your version is up to date, you should have Version 2.2.

To briefly explain our numbering system for versions, the first digit identifies a major break in the evolution. Thus Version 1 related to the pre-1979 work derived from the Pascal User Manual and Report, and Version 2 is the completely revised package produced after receipt of the first public draft of a Pascal Standard (ISO/TC97/SC5 N462, known as Working Draft 3). The second number relates to a revision level within that major version.

With the release of Version 2.0, and its subsequent rapid evolution through 2.1 to 2.2, we have achieved a relatively stable product. It is by now quite well known that in the 350+ programs of the package there are a small set which are incorrect (they do not test what they ought to, or have a syntax error, or a convention error), and there is a small set which are not as well-designed as they might be (failing for reasons which are unrelated to their purpose). Accordingly, while I was on sabbatical leave from the University of Tasmania in 1979/80, Brian Wichmann and staff at the National Physical Laboratories in England produced a new version 2.3 which attempts to correct these errors, and which adds a number of new tests together with old ones which were omitted from version 2 but were in version 1.

We will not distribute this version, and it will remain purely an internal revision level. Of necessity, the first production of a new level must be tested before release, and our testing of version 2.3 yields many issues which would have to be clarified before we could distribute it with the confidence in its quality that you are entitled to expect.

Even more cogently, we consider the revision of the validation package to conform to the new Draft Proposal (DP7185) to be even more important than tidying up the loose ends of an obsolete version level, and accordingly our efforts are now going into producing that version as soon as possible. It will be known as Version 3.0, and will take us at least two or three months to complete.

In this way we think we can avoid delays in the production of 3.0 and minimize the circulation of spurious tests and those which are relevant to N462 but not to DP7185 (or worse, reversed in the two versions...)

While undertaking the major revision required to produce the new version, we shall also attempt to simplify some aspects of testing. Since Version 3.0 will be a major revision, we shall issue it complete (i.e. not an update issue), but we intend in future to include a "last revision level" in the header of each test to facilitate identifying the latest changes.



The University of Tasmania

Postal Address: Box 252C, G.P.O., Hobart, Tasmania, Australia 7001

Telephone: 23 0561. Cables 'Tasuni' Telex: 58150 UNTAS

IN REPLY PLEASE QUOTE:

FILE NO.

IF TELEPHONING OR CALLING

ASK FOR

11th March, 1980

Mr. P. Pickelmann,
Computing Centre,
University of Michigan,
1075 Beal Avenue,
Ann Arbor, Michigan
U.S.A. 48109

Dear Paul,

Thank you for your letter, which I have just read after returning to Tasmania from study leave in USA and Europe. I was very excited to read it, as it seems a very thorough piece of work, and just the sort of thing we hoped the package would do.

I have taken the liberty of sending a copy of your report to Pascal News for reprinting; if you want it kept private please write to Rick Shaw and say so, or send revisions. I have also sent a copy to the AAEC (Jeff Tobias) as he has told me that his field test version passes all conformance and practically all deviance tests! (or at least the correct tests).

I do not think that a tape with all three tests would be of great use to me at present as we are about to shift up one sub-level in the tests, and a new version level is three months away (to conform to the new Draft Standard). I think I can glean all I need from your very comprehensive report.

On your "Distribution problems", etc:

1. Charset : will investigate.

2. Printfiles: the distributed skeleton program will readily paginate; I will not put control characters in for the few installations that want them, at the expense of making 99% of installations strip them off. The printed version was printed by a slight modification of the skeleton.

Errors in test programs : will investigate; most have been reported frequently (sigh; complete correctness of 350+ programs too much for us; and flaws like 6.2.1-7 slip through.)

Specific suggestions

Clock would be less standard than processtime. The name of a non-standard function is irrelevant; processtime is deliberately chosen so as not to be in anyone's system (except ours) and to return results in standard metric units (seconds). Consequently inadvertent rubbish results are unlikely.

The suggestion about [1 mod bitsperword] illustrates only poor quality compilation techniques. Our compiler and the ICL 1900 one should realize that the result is in the range 0..(bitsperword-1) anyway. Consequently I would prefer to keep the algorithm transparent rather than introduce extraneous variables whose whole purpose is to optimize less-than-perfect implementations. (As a matter of interest, I have been musing over a version with very large sets here; our implementation will handle them too.)

6.3.1 & 6.4.5-5 are slips; our compiler has full significance, and all the others I used for testing had 10 or 12 or 16 characters up to release. We also forgot to run the full package with our STANDARD switch set to enable the compiler to report these.

6.8.3.5-4 Perhaps maxint is a bit severe? We are seeking implementations which allow 'virtual infinity' of case, to show quality. (Our compiler will handle maxint of course, but I wouldn't condemn a compiler that had a hash-table algorithm with packed one-word records and hence was limited to less than maxint values as the key.)

LOOP. Agree. Didn't realize that anyone was foolish enough to use loop-exit until talking with IBM implementors.

For-loops: you are tackling things which were left out of Version 2 because I could not resolve them in advance of the Draft Standard (or at least tried to influence the Standard first).

VERSION indication is a good idea, which we had already noted, but not in so clear a form. Thanks.

Finally, can you send me your size in shirts? We have a free gift to validators who do good work for Pascal...

Yours sincerely,



Arthur Sale,
Information Science Department

IBM 370

THE UNIVERSITY OF MICHIGAN
COMPUTING CENTER
1075 BEAL AVENUE
ANN ARBOR, MICHIGAN 48109

January 22, 1980

Pascal Support
Department of Information Science
University of Tasmania
Box 252C, G.P.O.
Hobart 7000
Tasmania
Australia

Dear Sirs:

Here is a copy of my first version of a Validation Report for three IBM 360/370 compilers, and some comments and suggestions on the suite. I'll send another version after I finish adapting Release 3 of the Stony Brook compiler for MTS, which should fix several of the problems.

If you are interested, I could send a tape with the results for all three compilers.

Sincerely,



Paul Pickelmann

PP:kls

Enclosure

Dear Readers of Pascal News,
I am sending these reports to News to show an example (a good one) of the flood of information I am receiving on validation. See the report by me also in the News.

Arthur Sale

PASCAL VALIDATION SUITE REPORT

Pascal Processor Identification

Computer: IBM 360/370, Amdahl 470 ...
Amdahl 470/V7 used for tests

Processors:

AAEC - Pascal/8000 (MTS version) Version 1.2/F79
SIBR - Stony Brook Compiler (MTS version) Release 2.1/CT125
UBC - University of British Columbia Version Aug. 16/79

Test Conditions

Tester: Paul Fickelmann (University of Michigan)
Date: January 1980
Version: 2.2

A Note on a Bit of Ambiguity

by: it is ment

Parameter A parameter of any kind (value, var,
 procedure, or function) of a procedure
 or function.
Procedure Parameter A parameter of a procedure or function
 which is a procedure or function.

The "Pascal Validation Suite" is a set of 318 Pascal programs designed to test a compiler for compliance with the draft Pascal standard. A full listing of the suite along with Arther Sale's delightful introduction is in Pascal News, 16 (October 1979 arrived Jan. 80). The results of running the 3 Pascal compilers available on MTS are summarized below. A full report is in UNSP:PASCAL.NEWS.

Version 2.2 of the suite was used. This corresponds to the version of the draft in Pascal News, 14 (Jan. 79). There are at least two newer drafts and a new version of the suite is coming.

If the number of tests failed seems disappointing, note that the designers took care to test those things which have changed from one definition of Pascal to the next, as well as those (mostly errors) which are hard to deal with.

| Test Type | #tests | Failed/Passed | | |
|---------------|--------|---------------|---------|---------|
| | | AAEC | STEN | DEC |
| Coformance | 139 | 17/122 | 26/113 | 21/118 |
| Deviance | 94 | 33/ 61 | 35/ 59 | 41/ 53 |
| ErrorHandling | 46 | 23/ 23 | 22/ 24 | 24/ 22 |
| Implmentation | 15 | 1/ 14 | 0/ 15 | 1/ 14 |
| Quality | 23 | 5/ 13 | 4/ 19 | 3/ 15 |
| Extensions | 1 | 1/ 0 | 1/ 0 | 1/ 0 |
| Ccost | | \$16.98 | \$10.20 | \$38.75 |

Conformance Tests

AAFC STBR UBC

Number of tests passed = 122 113 118
Number of tests failed = 17 26 21

Failed Tests

AAFC

6.1.2-3, 6.1.8-3, 6.2.2-3, 6.3-1, 6.4.3.3-1, 6.4.3.3-4,
6.4.3.5-1, 6.4.3.5-2, 6.4.3.5-3, 6.5.1-1, 6.6.3.1-5, 6.6.3.4-2,
6.8.3.9-1, 6.8.3.9-7, 6.9.2-3, 6.9.4-4, 6.9.4-7

STBR

5.1.6-2, 6.2.1-6, 6.2.2-3, 6.2.2-8, 6.4.2.2-2, 6.4.3.3-1,
6.4.3.3-10, 6.4.3.5-1, 6.4.3.5-2, 6.4.3.5-3, 6.4.5-1, 6.6.3.1-1,
6.6.3.1-5, 6.6.3.2-1, 6.6.3.3-1, 6.6.3.4-2, 6.6.5.2-3, 6.6.5.2-4,
6.6.5.2-5, 6.6.6.2-3, 6.6.6.4-1, 6.6.6.5-1, 6.7.2.4-3, 6.8.3.9-7,
6.9.4-4, 6.9.4-15

UBC

6.1.3-2, 6.2.2-3, 6.2.2-8, 6.4.3.5-1, 6.4.3.5-2, 6.4.3.5-3,
6.5.1-1, 6.5.3.4-1, 6.6.3.1-1, 6.6.3.1-3, 6.6.3.1-5, 6.6.3.4-2,
6.6.5.2-3, 6.6.5.2-5, 6.6.6.2-3, 6.7.2.5-2, 6.8.3.9-7, 6.9.4-4,
6.9.4-15 6.9.4-6, 6.9.4-7,

Details of failed tests:

AAFC

Only the first eight characters of identifiers and reserved words are used. Some longer identifiers look like reserved words. Failed 6.1.2-3 and 6.3-1

UBC

Upper and lower letters are considered distinct in identifiers. Failed 6.1.3-2

STBR

Labels are compared as strings so leading zeros are significant. Failed 6.1.6-2

AAFC

In "{*...}" and "{...*}" the starting and ending delimiters don't match but are considered the entire comment, which is what later versions of the draft standard require. Failed 6.1.8-3

STBR

The program-parameters part of the program-heading is not optional. Failed 6.2.1-6, 6.6.3.2-1, 6.6.3.3-1, and 6.6.6.5-1

AAFC, STBR, UBC

When declaration for a type which is the domain of a pointer type appears after the declaration of the pointer type and there is a more global type with the same name, the more global type is used for the domain of the pointer instead of the locally declared type. Failed 6.2.2-3

STBR, UBC

Assignment to a function identifier is not permitted from within nested procedures and functions. Failed 6.2.2-8.

STBR

The cardinality of subranges must be less than Maxint. Programs will run as long as these are never assigned a value greater than Min(subtype)+Maxint. Failed 6.4.2.2-2 (error message, but runs)

STBR

The tag-field is required in variant records. Failed 6.4.3.3-1

AAFC

Empty record declarations containing a semicolon produce syntax errors. Failed 6.4.3.3-1

AAFC

The tag-field may not redefine an identifier elsewhere in the declaration part. Failed 6.4.3.3-4

STBR

Case constants outside the tag-field subrange are not allowed, which is what later versions of the draft standard require methinks. Failed 6.4.3.3-10

AAFC, STBR, UBC

Pointers are not allowed within files. Failed 6.4.3.5-1

AAFC

Null and length one lines have a blank appended when written. Failed 6.4.3.5-2

STBR, UBC

Null lines are replaced by length one lines when written. Failed 6.4.3.5-2, 6.4.3.5-3

STBR

To solve the "interactive file problem" fa is undefined until eof is checked. Failed 6.4.3.5-2, 6.6.5.2-4
There is a bug where an eof check is needed when it shouldn't be. Failed 6.4.3.5-3

UBC

The end-of-line character is eol not ' '. Failed 6.4.3.5-2

UBC

Local files (those other than program parameters) are not really local. They must be provided by the user and all files with the same name use the same file. Failed 6.4.3.5-2, 6.4.3.5-3, 6.5.3.4-1, 6.6.3.1-3, 6.6.5.2-3
6.6.5.2-5, 6.9.4-15

AAFC
Reset does not do an implicit writeln (except with output)
Failed 6.4.3.5-3

STEP
Assignment to a var parameter whose type is an alias for the type
of the value assigned gives an error message and causes the
compiler to program interrupt.
Failed 6.4.5-1

AAFC, UBC
Records may not contain files.
Failed 6.5.1-1

STEP, UBC
An actual parameter of some type for a var parameter which is a
subrange of that type is not allowed. This is what the draft
standard requires; the test is in error.
Failed 6.6.3.1-1

AAFC, STBR, UBC
Test has error. A parameter is included with a procedure parameter.
Failed 6.6.3.1-5

AAFC, STBR
The syntax for the par-list of procedure parameters is different.
UBC
Full specification(par-list)of procedure parameters is not allowed.
Failed 6.6.3.1-5, 6.6.3.4-2

AAFC, UBC
Cannot have procedure parameters with procedure parameters.
Failed 6.6.3.4-2

STEP, UBC
If the MTS-file which is used for a local file is not empty and
the first thing done is reset, the file is not empty and eof is
not true.
Failed 6.6.5.2-3

STEP
Pof used with file being written causes an error.
Failed 6.6.5.2-5

STEP
Test 6.6.6.2-3 requires too much precision of real functions.
UBC
The expression Arctan(0)=0 yields false even though Arctan(0)
yields 0.
Failed 6.6.6.2-3

STEP
Ord returns different values when applied to variables of a
subtype and its basetype which have the same value. Specifically
Ord(min(subtype))=0.
Failed 6.6.6.4-1

STEP
The expression "1 * (.)" causes a run error.
Failed 6.7.2.4-3

UBC
The expression "(.C,1.) <= A" causes a run error.
Failed 6.7.2.5-2

AAFC
In a for loop the assignment is done before the second expression
is evaluated.
Failed 6.8.3.9-1

AAFC,STBR,UBC
Extreme value in for loops cause problems. UBC infinite loops,
AAFC and STBR cause run errors.
Failed 6.8.3.9-7

AAFC
Real numbers are converted differently at compile time than at run
time.
Failed 6.9.2-3.

AAFC,STBR,UBC
The formatting of reals when the field width given is too small
is wrong. Test is likely wrong, as the draft standard is not
clear. This section is changed in later drafts.
Failed 6.9.4-4

UBC
Strings are left justified, not right justified as they should be.
Failed 6.9.4-6

AAFC,UBC
' TRUE' instead of 'TRUE ' is used when writing booleans. This
may be changed in later versions of the standard.
Failed 6.9.4-7

STEP
Due to a bug, local files which are not global may not be used.
Release 3 will fix this and many other problems with files.
Failed 6.9.4-15

Deviance Tests

| | AAFC | STER | UBC |
|-----------------------------------|------|------|-----|
| Number of deviations detected | = 61 | 59 | 53 |
| Number of undetected extensions | = 1 | 4 | 3 |
| Number of deviations not detected | = 32 | 31 | 38 |

Failed Tests

AAFC
6.1.2-1, 6.1.7-7, 6.1.7-8, 6.1.7-11, 6.2.1-5, 6.2.2-4,
6.2.2-9, 6.3-6, 6.4.1-2, 6.4.1-3, 6.4.5-2, 6.4.5-3,
6.4.5-13, 6.4.5-4, 6.4.5-5, 6.6.2-5, 6.6.3.5-2, 6.6.3.6-2,
6.6.3.6-3, 6.6.3.6-4, 6.6.3.6-5, 6.8.2.4-2, 6.8.2.4-3, 6.8.2.4-4,
6.8.3.9-2, 6.8.3.9-3, 6.8.3.9-4, 6.8.3.9-9, 6.8.3.9-13, 6.8.3.9-14,
6.8.3.9-16, 6.8.3.9-19

STER
6.1.7-5, 6.1.7-6, 6.10-1, 6.10-3, 6.2.1-5, 6.2.2-4,
6.3-2, 6.3-3, 6.3-4, 6.3-5, 6.4.3.2-5, 6.4.4-2,
6.4.5-13, 6.4.5-3, 6.4.5-4, 6.4.5-5, 6.6.1-6, 6.6.2-5,
6.6.6.3-4, 6.7.2.2-9, 6.8.2.4-2, 6.8.2.4-3, 6.8.2.4-4, 6.8.3.5-10,
6.8.3.9-2, 6.8.3.9-3, 6.8.3.9-4, 6.8.3.9-9, 6.8.3.9-14, 6.8.3.9-16,
6.8.3.9-19

UBC
6.1.7-5, 6.1.7-6, 6.10-1, 6.10-3, 6.2.1-5, 6.2.2-4,
6.3-2, 6.3-3, 6.3-4, 6.3-5, 6.4.1-3, 6.4.3.1-1,
6.4.3.1-2, 6.4.3.2-5, 6.4.5-3, 6.4.5-5, 6.4.5-10, 6.4.5-11,
6.4.5-13, 6.6.2-5, 6.6.3.5-2, 6.6.3.6-2, 6.6.3.6-3, 6.6.3.6-4,
6.6.3.6-5, 6.7.2.2-9, 6.8.2.4-2, 6.8.2.4-3, 6.8.2.4-4, 6.8.3.9-2,
6.8.3.9-3, 6.8.3.9-4, 6.8.3.9-9, 6.8.3.9-11, 6.8.3.9-13, 6.8.3.9-14,
6.8.3.9-16, 6.8.3.9-19,

Undetected extensions

AAFC
6.9.4-9

STER
6.1.5-6, 6.8.3.5-12, 6.9.4-9, 6.9.4-12

UBC
6.1.5-6, 6.9.4-9, 6.9.4-12

Details of deviations not detected

AAFC
Nil is not reserved.
Failed 6.1.2-1

STER,UBC
Packed and unpacked arrays are considered equivalent.
Failed 6.1.7-5

STER,UBC
Strings are compatible with arrays of length n, not just those with index 1..n.
Failed 6.1.7-6, 6.4.3.2-5

AAFC
Strings are compatible with arrays of subrange of char.
Failed 6.1.7-7 and 6.1.7-8

AAFC
Null strings are accepted.
Failed 6.1.7-11

AAFC,STER,UBC
Declared but unused labels are allowed.
Failed 6.2.1-5

AAFC,STER,UBC
With in a scope a global name may be used then redefined.
Failed 6.2.2-4

AAFC
Function identifiers may be assigned to outside the bounds (text) of the function.
Failed 6.2.2-9

STER,UBC
"++" (but not "--") may be used on things of type CHAR, string, and scalars, not just integers and reals.
Failed 6.3-2, 6.3-3, 6.3-4, 6.3-5, and 6.7.2.2-9

AAFC
A name may be used in it's own definition e.g. "const ten=ten;"
Failed 6.3-6, and 6.4.1-2

AAFC,UBC
A global name may be used within a record which redefines that name.
Failed 6.4.1-3

UBC
Allows packed anything not just (direct) structures.
Failed 6.4.3.1-1, and 6.4.3.1-2

STER
Pointers to undeclared types may be used, but not dereferenced.
Failed 6.4.4-2

UBC
Comparisons are allowed between diferent types.
Failed 6.4.5-10 and 6.4.5-11

AAFC,STER,UBC
The P4 definition of type equivalence rather than the stricter current definiton.
Failed 6.4.5-3, 6.4.5-4(AAFC,STER), 6.4.5-5, 6.4.5-13

AAFC
A compatible type is allowed as a var parameter.
Failed 6.4.5-2

STBR
Missing POPRARE procedures go undetected.
Failed 6.6.1-6

AAFC,STBR,UBC
Missing assignment to a function identifier goes undetected.
Failed 6.6.2-5

AAFC
Actual function parameters returning types compatible with the
formal function parameter are allowed.
Failed 6.6.3.5-2

AAFC,UBC
Actual and formal procedure parameters may have parameters which
are compatible, not just the same.
Failed 6.6.3.6-2, and 6.6.3.6-3

STBR
Trunc and Round with integer arguments get by.
Failed 6.6.6.3-4

AAFC,STBR,UBC
Gotc's are allowed between then and else parts of if statements and
between cases in a case statement. A later draft allowed this, but
it looks like it's out of the current one, which is too bad at
least in the case of the case statements.
Failed 6.8.2.4-2, and 6.8.2.4-3

AAFC,STBR,UBC
Gotc's are allowed into structured statements. See the test for
some interesting implications of this and the definition in the
draft.
Failed 6.8.2.4-4

STBR
Real case selectors get by (when the case constants are reals).
Failed 6.8.3.5-10

UBC
Components of records are allowed as for loop variables.
Failed 6.8.3.9-11

AAFC,STBR,UBC
Non-local variables are allowed as for loop variables.

Assignments to for loop variables inside the loop are allowed.

Nested for loops with the same variable are allowed. In STBR
this doesn't cause infinite loops, since at the top of the loop
the variable gets the value it would have if not changed.
Failed 6.8.3.9-2, 6.8.3.9-3, 6.8.3.9-4, 6.8.3.9-9, 6.8.3.9-14,
6.8.3.9-16, and 6.8.3.9-19

STBR,UBC
Output may be used even if it doesn't appear in the program header.
Failed 6.10-1

STBR,UBC
Write may be used without specifying a file even when output

has been declared.
Failed 6.10-3

Details of extensions not detected

STBR,UBC
'e' for 'E' is allowed in real constants. Later drafts allow this.
Failed 6.1.5-6

STBR
Subranges in case lists are not flagged as extensions. (Version
2S of the compiler doesn't allow them though).
Failed 6.8.3.5-12

AAFC,STBR,UBC
Zero and negative field widths are allowed. Later drafts may
allow this.
Failed 6.9.4-9,

STBR,UBC
Write works with unpacked arrays of char, not just packed ones.
Failed 6.9.4-12

Tests failed for non-conformance

UBC
Fully specified parameter lists are not allowed.
Failed 6.6.3.5-2, 6.6.3.6-2, 6.6.3.6-3, 6.6.3.6-4, and 6.6.3.6-5

AAFC
Procedure parameters may have only value parameters.
Failed 6.6.3.6-3, and 6.6.3.6-4

AAFC,UBC
Loop is a reserved word.
Failed 6.8.3.9-9, 6.8.3.9-13, and 6.8.3.9-14

Error-Handling

| | | | |
|-------------------------------|------|------|-----|
| | AAFC | STBR | UBC |
| Number of errors detected | = | 23 | 24 |
| Number of errors not detected | = | 23 | 22 |

Failed Tests

AAFC
6.2.1-7, 6.4.3.3-5, 6.4.3.3-6, 6.4.3.3-7, 6.4.3.3-8, 6.4.3.3-12,
6.4.6-7, 6.4.6-8, 6.6.2-6, 6.6.5.2-6, 6.6.5.2-7, 6.6.5.3-3,
6.6.5.3-4, 6.6.5.3-5, 6.6.5.3-6, 6.6.5.3-7, 6.6.5.3-8, 6.6.5.3-9,
6.7.2.2-6, 6.7.2.4-1, 6.8.3.9-5, 6.8.3.9-6, 6.8.3.9-17

STBR
6.2.1-7, 6.4.3.3-5, 6.4.3.3-6, 6.4.3.3-7, 6.4.3.3-8, 6.4.6-7,
6.4.6-8, 6.6.2-6, 6.6.5.2-2, 6.6.5.2-6, 6.6.5.2-7, 6.6.5.3-3,
6.6.5.3-4, 6.6.5.3-5, 6.6.5.3-6, 6.6.5.3-7, 6.6.5.3-8, 6.6.5.3-9,
6.7.2.4-1, 6.8.3.9-5, 6.8.3.9-6, 6.8.3.9-17

UBC
6.2.1-7, 6.4.3.3-5, 6.4.3.3-6, 6.4.3.3-7, 6.4.3.3-8, 6.4.3.3-12,
6.6.2-6, 6.6.5.2-6, 6.6.5.2-7, 6.6.5.3-3, 6.6.5.3-4, 6.6.5.3-5,
6.6.5.3-6, 6.6.5.3-7, 6.6.5.3-8, 6.6.5.3-9, 6.6.6.3-2, 6.6.6.3-3,
6.7.2.2-6, 6.7.2.2-7, 6.7.2.4-1, 6.8.3.9-5, 6.8.3.9-6, 6.8.3.9-17

Details of failed tests:

AAFC,STBR,UBC
Use of undefined variables is not detected.
Failed 6.2.1-7, 6.4.3.3-6, 6.4.3.3-7, 6.4.3.3-8, 6.6.2-6,
6.8.3.9-5 6.8.3.9-6

AAFC
Use of a null record causes an operation exception.

STBR
Use of a null record is considered an incompatible assignment.

UBC
Use of a null record which is therefor an undefined variable is not detected.
Fails 6.4.3.3-12

AAFC,STBR,UBC
Variant errors are undetected
Failed 6.4.3.3-5

AAFC,STBR,UBC
Set assignments out of range are not detected. Comments in 6.7.2.4-1 say something about "operations on overlapping sets" but I can't find section 6.7.2.4!
Failed 6.4.6-7(AAFC,STBR), 6.4.6-8(AAFC,STBR), 6.7.2.4-1

STBR
Get with eof true is not detected.
Failed 6.6.5.2-2

AAFC,STBR,UBC
Put while P2 is a parameter to a procedure is not detected. The test has a value parameter and this may not be an error unless it is a var par.
Failed 6.6.5.2-6

AAFC,STBR,UBC
P3 being changed while it is in use by a with statement is not detected.
Failed 6.6.5.2-7

AAFC,STBR,UBC
Dispose does nothing so it does not detect things which may not be disposed, nil, undefined, or active variables.
Failed 6.6.5.3-3, 6.6.5.3-4, 6.6.5.3-5, and 6.6.5.3-6

AAFC,STBR,UBC
Records created with the variant form of new have the same size as others. Violations of the restrictions on use of these are not detected.
Failed 6.6.5.3-7, 6.6.5.3-8, and 6.6.5.3-9

UBC
Trunc and round do not detect values greater than maxint.
Failed 6.6.6.3-2, and 6.6.6.3-3

AAFC,UBC
Results of (some) operations which are outside -maxint..maxint are not detected.
Failed 6.7.2.2-6, 6.7.2.2-7(UBC)

AAFC,STBR,UBC
As with 6.8.3.9-19, no errors for nested for loops with the same variable. AAFC,UBC go into infinite loops
Failed 6.8.3.9-17

Quality Measurement

| | AAFC | STBR | UBC |
|------------------------------|------|------|-----|
| Number of tests run = | 18 | 23 | 18 |
| Number incorrectly handled = | 5 | 4 | 3 |

Failed Tests

AAFC
 5.2.2-1, 6.1.3-3, 6.1.8-4, 6.4.3.4-5, 6.6.1-7, 6.8.3.5-2,
 6.8.3.9-18

STBR
 6.1.8-4, 6.4.3.2-4, 6.8.3.5-2, 6.8.3.5-6,

UBC
 6.1.8-4, 6.4.3.2-4, 6.8.3.5-2

Tests not run

AAFC, UBC
 6.6.6.2-6, 6.6.6.2-7, 6.6.6.2-8, 6.6.6.2-9, 6.6.6.2-10

Details of failed tests:

AAFC
 No warning is given for long identifiers, and only the first eight characters are used.
 Failed 5.2.2-1, 6.1.3-3

AAFC, STBR, UBC
 No warning is given for a (short) comment with a missing "}".
 Failed 6.1.8-4

STBR, UBC
 Array(.integer.) confuses the compiler and causes an obscure things at run-time.
 Failed 6.4.3.2-4

AAFC
 (.1 mod bitsperword .) is not done correctly. Worked when changed to (.t.) where t was 0..bitsminus1.
 Failed 6.4.3.4-5

AAFC
 Procedure nesting is limited to 6 levels (main, P1..P5).
 Failed 6.6.1-7

AAFC, STBR, UBC
 No warning is given for an impossible case, one whose label is outside the subrange of the selector. This maybe an error in later drafts.
 Failed 6.8.3.5-2

Implementation-Dependence

| | AAFC | STBR | UBC |
|------------------------------|------|------|-----|
| Number of tests run = | 15 | 15 | 15 |
| Number incorrectly handled = | 1 | 0 | 1 |

Tests Incorrectly Handled

AAFC
 There was an integer overflow evaluation trunc((a+b)-a) which should have returned 16.
 Failed 6.6.6.2-11

UBC
 Set of char should work, but doesn't always
 Failed 6.4.3.4-2

Test Results

Test 6.4.2.2-7
 AAFC, STBR, UBC
 Maxint = 2,147,483,647

Test 6.4.3.4-2
 AAFC, UBC
 Set of char is allowed.
 UBC
 Set of char is allowed and should work, but the test fails.

Test 6.4.3.4-4
 AAFC
 Sets of 0..1000 are allowed. Range is 0..2047.
 STBR
 Sets of 0..1000 are allowed. Any subrange with 2048 or fewer members can be the base type for a set. Set constructor works only on scalars and subranges, not integers.
 UBC
 Sets of 0..1000 not allowed. Base types may have upto 256 members. Set constructor only works with numbers in 0..255.

Test 6.6.6.2-11
 AAFC
 There is an integer overflow in trunc(expr=16.0), only with this program (??).
 STBR
 Beta=16, T=6, End=0, Ngrd=1, Macheq=-5, Negexp=-6, Iexp=7, Minexp=-65, maxexp=63, eps=9.53674316e-07, epsneg=5.96046448e-08, xmin=5.39760535e-79, xmax=7.23700515e+75
 UBC
 Beta=16, T=16, End=0, Ngrd=1, Macheq=-13, Negexp=-14, Iexp=7, Minexp=-65, maxexp=63, eps=2.22044605e-16, epsneg=1.38777878e-17, xmin=5.39760535e-79, xmax=7.23700515e+75

Tests 6.7.2.3-2, 6.7.2.3-3
 AAFC, UBC
 Boolean expressions are fully evaluated. UBC has option to use

partial evaluation.

STEP
MacCarthy evaluation of boolean expressions is used.

Tests 6.8.2.2-1, 6.8.2.2-2

AAFC,UBC
Tests show selection before evaluation.

STEP
First test shows selection before evaluation, second evaluation before selection.

Tests 6.9.4.5, 6.9.4-11

AAFC
Default field widths for integers 12, reals 24, booleans 5.
Exponents have 2 digits.

STEP
Default field widths for integers 12, reals 14, booleans 6.
Exponents have 2 digits.

UBC
Default field widths for integers 10, reals 22, booleans 10.
Exponents have 2 digits.

Test 6.6.6.1-1

AAFC,UBC
No standard procedures may be used as procedure parameters.

STBR
Only Sin, Cos, Exp, Ln, Sqrt, and Arctan may be used as procedure parameters.

Test 6.10-2

AAFC,STBR
Rewrite(output) is not allowed.

UBC
Rewrite(output) is allowed.

Test 6.11-1, 6.11-2, 6.11-3

AAFC,STEP,UBC
These substitute symbols are allowed and no others

"*" "*" for "}" "{"
"." "." for "[" "]"
"?" for "?"

STEP

There is a limit on the size of any one procedure which is about 200 statements. This could be easily increased, but this is the only program known to exceed it.
Failed 6.8.3.5-E

Details of tests not run

AAFC, UBC

These tests used upper case identifiers declared in lower case and had 'e' in real constants.
6.6.6.2-6, 6.6.6.2-7, 6.6.6.2-8, 6.6.6.2-9, 6.6.6.2-10

Results of Tests

Test 6.1.3-3

AAFC
Only the first 8 characters of an identifier are used.
STEP,UBC

Tests reports more than 20 characters of identifiers used. STBR uses all characters, UBC uses 32.

Test 6.4.3.3-9

AAFC,STEP,UBC
The tag-field in records is not checked. Test reports 'exact correlation'

Test 6.4.3.4-5

Measures the time for Marshall's algorithm on a 80x80 matrix. Original uses array(.0..79.) of array(.0..4.) of set of 0..15. Modified uses array(.0..79.) of set of 0..79.

| | Original | | Modified | |
|------|-----------|------------------|-----------|------------------|
| | time(sec) | size(words/bits) | time(sec) | size(words/bits) |
| AAFC | 0.087 | 502/16064 | 0.021 | 388/12416 |
| STEP | 0.060 | 400/12800 | 0.020 | 310/ 9920 |
| UBC | 0.089 | 670/21440 | 0.035 | 562/17984 |

Test 6.7.2.2-4

AAFC,STEP,UBC
Div and mod with negative operands are as in the latest draft. A div B = Trunc(A/B), and mod returns the remainder of div, that is it has the same sign as the quotient.

Test 6.8.3.9-18

AAFC
After a for loop the loop variable may have a value which is out of range.

STEP,UBC
After a for loop the loop variable has value of the final expression.

Test *** (All)

The total cost of running all 318 programs was:

AAFC \$16.98
STBR \$10.20 done Compile and Execute, several compilations per run
UBC \$38.75 done with ICAENG

Burroughs B6700

PASCAL VALIDATION SUITE REPORT

Pascal Processor Identification

Computer: Burroughs B6700
Processor: B6700 Pascal version 3.0.001
(University of Tasmania compiler)

Test Conditions

Tester: R.A. Freak (implementation/maintenance team member)
Date: March 1980
Validation Suite Version: 2.2

Conformance Tests

Number of tests passed: 137
Number of tests failed: 1

Details of failed tests:

Test 6.4.3.5-1 fails because a file of pointers
or a file of sets is not permitted.

Deviance Test

Number of deviations correctly detected: 83
Number of tests showing true extensions: 2 (2 actual extensions)
Number of tests not detecting erroneous deviations: 9 (5 basic causes)
Number of tests failed: 0

Details of extensions:

Test 6.1.5-6 shows that the lower case e may be used
in real numbers (for example 1.602e-20). This feature
has been included in the new draft standard.

Test 6.10-1 shows that the file parameters in the
program heading are ignored in B6700 Pascal.

Details of deviations not detected:

Test 6.1.2-1 shows that nil may be redefined.

Tests 6.2.2-4, 6.3-6 and 6.4.1-3 show that a common
scope error was not detected by the compiler.

Tests 6.8.2.4-2, 6.8.2.4-3 and 6.4.2.4-4 show that
a goto between branches of a statement is permitted.

Test 6.9.4-9 shows that integers may be written with
a negative format.

Test 6.10-3 shows that the file output may be
redefined at the program level.

Error Handling

Number of errors correctly detected: 33
Number of errors not detected: 13 (4 basic causes)

Details of errors not detected: The errors not detected
fall into a number of categories -

Tests 6.4.3.3-5, 6.4.3.3-6, 6.4.3.3-7 and 6.4.3.3-8
indicate that no checking is performed on the tag
field of variant records.

Tests 6.6.5.2-1 and 6.6.5.2-7 indicate that a file
buffer variable can be altered illegally and a put
may be performed on an input file.

Tests 6.6.5.3-3, 6.6.5.3-4, 6.6.5.3-5 and 6.6.5.3-6
fail because dispose always returns a nil pointer in
B6700 Pascal and no check is performed on the pointer
parameter.

Tests 6.6.5.3-7, 6.6.5.3-8 and 6.6.5.3-9 fail because
no checks are inserted to check pointers after they
have been assigned a value using the variant form of new.

Implementationdefined

Number of tests run: 15
Number of tests incorrectly handled: 0

Details of implementation-dependence:

Test 6.4.2.2-7 shows maxint to be 549755813887.

Tests 6.4.3.4-2 and 6.4.3.4-4 show that large sets are allowed. The maximum set size is 65536 elements. A set of char is permitted.

Test 6.6.6.1-1 shows that some standard functions can be passed as parameters. Those which use in-line code cannot be passed as parameters.

Test 6.6.6.2-11 details some machine characteristics regarding number formats.

Tests 6.7.2.3-2 and 6.7.2.3-3 show that boolean expressions are fully evaluated.

Tests 6.8.2.2-1 and 6.8.2.2-2 show that a variable is selected before the expression is evaluated in an assignment statement.

Tests 6.9.4-5 and 6.9.4-11 show that the default size for an exponent field on output is 2; for a real number it is 15; for a boolean 5 and the size varies for integers according to the value being written.

Test 6.10-2 indicates that a rewrite on the standard file output is permissible.

Tests 6.11-1, 6.11-2 and 6.11-3 show that the alternative comment delimiters have been implemented, as have the alternative pointer symbols. No other equivalent symbols have been implemented.

Quality Measurement

| | |
|--------------------------------------|----|
| Number of tests run: | 23 |
| Number of tests incorrectly handled: | 0 |

Results of tests:

Test 5.2.2-1 shows that identifiers are distinguished over their whole length.

Test 6.1.3-3 shows that more than 20 significant characters may appear in an identifier, in fact, the number of characters in a line is allowed.

A warning is produced if a semicolon is detected in a comment (test 6.1.8-4).

Tests 6.2.1-8, 6.2.1-9 and 6.5.1-2 indicate that large lists of declarations may be made in each block.

An array with an integer indextype is not permitted (test 6.4.3.2-4).

Test 6.4.3.3-9 shows that variant fields of a record occupy the same space, using the declared order.

Test 6.4.3.4-5 (Warshall's algorithm) took 0.698304 secs CPU on the Burroughs B6700 and 158 bytes.

Tests 6.6.1-7, 6.8.3.9-20 and 6.8.3.10-7 show that procedures, for statements and with statements may each be nested to a depth greater than 15.

Tests 6.6.6.2-6, 6.6.6.2-7, 6.6.6.2-8, 6.6.6.2-9 and 6.6.6.2-10, tested the sqrt, atan, exp, sin/cos and ln functions and all tests were successfully completed, without any significant errors in the values.

Test 6.7.2.2-4 shows that div has been implemented consistently for negative operands, returning trunc. mod returns for the remainder of div.

Test 6.8.3.5-2 shows that case constants must be of the same type as the case-index, if the case-index is a subrange, and a warning is given for case constants which cannot be reached.

Test 6.8.3.5-8 shows that a large case statement (256 selections) is permissible.

Test 6.8.3.9-18 indicates that range checking is always used in a case statement after a for statement to check the for variable.

Test 6.9.4-10 shows that file buffers are flushed at the end of a block and test 6.9.3-14 indicates that recursive I/O using the same file is allowed.

Extensions

Number of tests run: 1

Test 6.8.3.5-14 shows that the otherwise clause in a case statement has been implemented according to the accepted convention.

Data General Eclipse

PASCAL VALIDATION SUITE REPORT

PASCAL Processor Identification

Computer: Data General Eclipse S/130
Processor: Medical Data Consultants BLAISE
(PASCAL P4 v4 DEC 1979)

Test Conditions

Tester: Ted C. Park
Date: April, 1980
Validation Suite Version: 2.2

General Comments

1. The overall quality and completeness of the validation programs is excellent.
2. The orthogonality of the programs is poor. Oftentimes many things are checked in one test. For instance, my compiler supports TRUNC but not ROUND. Since these are checked in the same test, this causes problems.
3. The skeleton program seems like a good idea but in actual practice it did me very little good. I wonder if it's really helpful to anyone else.
4. The skeleton program requires a "dummy" terminating program at the end of the validation suite. There is none.
5. The first line of program 6.8.3.4-1 is missing a comma.
6. Program 6.6.1-6 is missing a semicolon on the next to the last statement.

The PASCAL-P4 Subset

MDC "BLAISE" is based on PASCAL-P4 which is a known subset of PASCAL as described in Jensen and Wirth. It was not clear at the outset how a subset compiler would react to the validation programs. All the programs were submitted to the compiler and although many were

invalid due to the known design restrictions, I am pleased to report that the compiler either accepted each program or printed appropriate diagnostic messages in every case. No program caused any system failure or crash either at compile or run time.

The known design constraints of PASCAL-P4 (See PASCAL NEWS #11, Page 70) are listed below.

NIL is a predeclared constant
FORWARD is a reserved word
Only the alternate form of comment delimiters are allowed
No MAXINT
No TEXT
No ROUND
No PAGE
No DISPOSE
No REWRITE
No RESET
No PACK
No UNPACK
The program heading is not required
Every variant record must have a tag field
No user declared files or associated features (BLAISE does not support GET or PUT)
No output of BOOLEANS
No output of REALs in fixed notation
No formal parameter functions or procedures
No subrange set constructors
64 character ASCII character set which implies upper case letters only.
No literal text strings longer than 16 characters.
8 character limit on identifier lengths.

Since the upper case only and 16 character literal string length restrictions applied universally to almost all programs, they were all adjusted accordingly. Other than that, no changes were made to any of the programs. The results are reported below.

Conformance Tests

| | |
|---|-----|
| Number of tests attempted: | 139 |
| Number of tests invalid due to known design restrictions: | 31 |
| Number of tests passed: | 102 |
| Number of tests failed: | 6 |

Details of Failed Tests

Test 6.1.5-2 failed because long REALs are not accepted by the compiler, however, a warning message was issued.

Test 6.2.2-3 failed due to a scoping error.

Test 6.4.3.5-4 failed because no end of line was inserted at final buffer flush.

Test 6.8.2.4-1 failed because non-local GOTOs are not allowed.

Test 6.8.3.5-4 failed because of the large table generated for a sparse CASE statement.

Test 6.8.3.9-1 failed because the index of a FOR statement was set up before the final expression of the FOR statement was evaluated.

Deviance Tests

| | |
|---|----|
| Number of tests attempted: | 94 |
| Number of tests invalid due to known design restrictions: | 21 |
| Number of tests passed: | 50 |
| Number of tests failed: | 23 |

Details of Failed Tests

Test 6.1.7-8 failed because any character may be assigned to an element whose type is subrange of CHAR.

Test 6.2.2-4 fails to detect the scope overlap.

Test 6.3-5 fails because it allows a signed character constant.

Test 6.3-6 fails because it allows a constant to be used in its own declaration.

Test 6.4.1-3 fails because it allows a type to be used in its own declaration.

Test 6.4.5-2 fails because subranges of the same host are treated as identical.

Test 6.4.5-3 fails because similar arrays are treated as identical.

Test 6.4.5-4 fails because similar records are treated as identical.

Test 6.4.5-5 fails because similar pointers are treated as identical.

Test 6.6.2-5 fails because assignment to the function identifier is not required.

6.6.6.4-6 fails because SUCC and PRED are allowed for REALs.

Test 6.7.2.2-9 fails because the unary plus is allowed for a variable of type CHAR.

Test 6.8.2.4-2 fails because jumps between branches of an IF statement are allowed.

Test 6.8.2.4-3 fails because jumps between branches of a CASE statement are allowed.

Test 6.8.3.9-2 fails because assignment to the FOR index is allowed.

Test 6.8.3.9-3 fails because assignment to the FOR index is allowed.

Test 6.8.3.9-4 fails because assignment to the FOR index is allowed.

Test 6.8.3.9-9 fails because a non-local variable is allowed as a FOR index.

Test 6.8.3.9-14 fails because a global variable is allowed as a FOR index.

Test 6.8.3.9-16 fails because the FOR index can be read.

TEST 6.8.3.9-19 fails because nested FORs with the same index are not detected.

Test 6.9.4-9 fails because zero and negative field widths allowed are for integer output.

Test 6.9.4-12 fails because output of non-packed arrays is allowed.

Error Handling Tests

| | |
|---|----|
| Total tests attempted: | 46 |
| Number of tests invalid due to known design restrictions: | 13 |
| Number of tests passed: | 8 |
| * Number of tests passed only if "DEBUG" option selected: | 11 |

Number of tests failed:

14

Details of Failed Tests

- Test 6.2.1-7 local values are not undefined prior to definition.
- Test 6.4.3.3-5 other variants do not cease to exist when tag field changed.
- Test 6.4.3.3-6 variants are not undefined prior to definition.
- Test 6.4.3.3-12 empty field is not flagged as undefined prior to definition.
- * Test 6.4.6-4 out of range not detected on integer assignment.
 - * Test 6.4.6-5 out of range not detected on integer parameter passing.
 - * Test 6.4.6-6 out of range not detected on integer array index.
 - * Test 6.4.6-7 out of range not detected on set assignment.
 - * Test 6.4.6-8 out of range not detected on set parameter passing.
 - * Test 6.5.3.2-1 out of range not detected on two dimensional integer array index.
 - * Test 6.5.4-1 pointer equals NIL not detected at use.
- Test 6.5.4-2 pointer undefined not detected at use.
- Test 6.6.2-6 function having no value assigned to it as undetected.
- Test 6.6.5.3-7 assignment compatibility of records not checked.
- Test 6.6.5.3-8 assignment compatibility of records not checked.
- Test 6.6.5.3-9 assignment compatibility of records not checked.
- * Test 6.6.6.4-4 SUCC function applied to last value not detected.
 - * Test 6.6.6.4-5 PRED function applied to first value not detected.
 - * Test 6.6.6.4-7 character out of range not detected.
- Test 6.7.2.2-3 divide by zero not detected.
- Test 6.7.2.2-8 mod by zero not detected.
- * Test 6.7.2.4-1 out of range SET values not detected.

Test 6.8.3.9-5 undefined FOR indexed after loop not detected.

Test 6.8.3.9-6 undefined FOR index after zero pass loop not detected.

Test 6.8.3.9-17 nested FOR using same index not detected.

Implementation-Defined Tests

- Test 6.4.2.2-7 no MAXINT
- Test 6.4.3.4-2 SET of CHAR allowed
- Test 6.4.3.4-4 SET base-type size 0...63
- Test 6.6.6.1-1 functions not allowed as parameters
- Test 6.6.6.2-11 all floating-point tests OK
- Test 6.7.2.3-2 (A AND B) fully evaluated
- Test 6.7.2.3-3 (A OR B) fully evaluated
- Test 6.8.2.2-1 left side of array assignment evaluated before right side
- Test 6.8.2.2-2 left side of pointer assignment evaluated before right side
- Test 6.9.4-5 two digits written for exponent
- Test 6.9.4-11 IFW=10 RFW=20 BFW not allowed
- Test 6.10-2 rewrite not allowed
- Test 6.11-1 {} not allowed for comments
- Test 6.11-2 equivalent symbols for ^ : ; : = [] not allowed
- Test 6.11-3 equivalent symbols for < > <= >= <> not allowed

Quality Tests

- Test 6.2.2-1 identifiers not distinguished past 8 characters
- Test 6.1.3-3 identifier significance is 8 characters

DEC VAX 11/780

Test 6.1.8-4 no help in locating unclosed comment
Test 6.2.1-8 >= 50 types allowed
Test 6.2.1-9 >= 50 labels allowed
Test 6.4.3.2-4 integer not allowed as index type
Test 6.4.3.3-9 reverse allocation of listed vars
Test 6.4.3.4-5 1.4 seconds - 916 bytes vs. .8 seconds - 143 bytes
Test 6.5.1-2 long declaration lists allowed
Test 6.6.1-7 procedures may be nested only 10 deep
Test 6.6.6.2-6 SQRT is OK
Test 6.6.6.2-7 ARCTAN is OK
Test 6.6.6.2-8 EXP is OK
Test 6.6.6.2-9 SIN and COS are OK
Test 6.6.6.2-10 LN is OK
Test 6.7.2.2-4 DIV is OK -- MOD returns remainder
Test 6.8.3.5-2 impossible branch of CASE not detected
Test 6.8.3.5-8 >= 256 CASES allowed
Test 6.8.3.9-18 FOR index is just bumped along without checking
Test 6.8.3.9-20 >= 15 nested FORs allowed
Test 6.8.3.10-7 >= 15 nested WITHs allowed
Test 6.8.4-10 output is not flushed at end of job
Test 6.9.4-14 recursive I/O allowed

Extension Tests

Test 6.8.3.5-14 'OTHERWISE' extension not implemented

VAX 11 Pascal Validation Report

Pascal Processor Identification

Computer: VAX 11/780
Processor: VAX 11 Pascal V1.0-1

Test Conditions

Time: 1988 01 21
Test runs carried out by S. Matwin and B. Silverman
Test annotation and analysis by S. Matwin
Validation Suite version: 2.2

Conformance Tests

Number of tests passed: 127
Number of tests failed: 12, 8 basic causes

Details of failed tests:

Test 6.4.3.3-1 shows that empty record is not implemented.
Test 6.4.3.3-4 shows that the processor does not allow tag field redefinition
Tests 6.4.3.5-1 and 6.5.1-1 show that the function EXP does not pass accuracy test
Test 6.8.3.5-4 shows that case label range is limited to 1000
Test 6.8.3.9-7 shows that MAXINT is too big as an extreme value in a for statement, leads to overflow
Test 6.8.4-3, 6.9.4-4, 6.9.4-7, and 6.9.5-1 fail with a component of a packed structure as an actual variable parameter. This will happen in any compiler, written in Pascal, as the parameters of READ will be variable. On the other hand the Standard prohibits 'the use of components of variables of any packed type as actual variable parameters'
Test 6.9.4-15 shows that WRITE without the file parameter refers to a locally defined file

Deviance Tests

Number of deviations correctly detected: 67
Number of tests not detecting erroneous deviations: 24
(6 basic causes)

Details of deviations not detected:

Test 6.1.2-1 shows that the reserved word nil may be redefined
Test 6.1.5-6 shows that the processor allows small letter 'e' as an exponent indicator (which is sometimes claimed to be an extension)
Tests 6.2.2-4 and 6.3-6 show that in some circumstances the processor does not detect the use of an identifier prior to its definition

Tests 6.4.5-2 thru 6.4.5-5 and 6.4.5-13 show that the processor requires the compatibility of the types of formal and actual parameters, rather than type identity

Test 6.6.2-5 shows that the processor does not check the occurrence of at least one assignment to the function name in the function block

Tests 6.8.2.4-2 thru 6.8.2.4-4 show that the processor allows jumps between branches of an `if` and a `case` statement

Tests 6.8.3.9-2 thru 6.8.3.9-5, 6.8.3.9-13 thru 6.8.3.9-16 and 6.8.3.9-19 show that the processor omits some restrictions imposed on a `for` statement. The processor prohibits neither the assignment to the control variable nor the use of that variable after the completion of the loop. Other deviations of that class are

- control variable can be a formal parameter or a global variable
- reading into a control variable is allowed
- non-local control variable combined with recursion leads to an infinitely looping program

Error Handling

Number of errors correctly detected: 13
 Number of errors not detected: 31

Details of errors not detected

Tests 6.2.1-7 and 6.4.3.3-12 show that the undefined values are not detected by the processor

Tests 6.4.3.3-5 thru 6.4.3.3-8 show that the existence of a particular variant in a record variable is not tested by the processor

Tests 6.4.6-4 thru 6.4.6-8, 6.5.3.2-1 and 6.7.2.4-1 show that the processor tests only the static compatibility, without checking the appropriateness of the actual value during run-time (unlike, e.g., Zurich Pascal-2 compiler)

Test 6.6.2-6 show that there is no dynamic checking of the fact whether the name is assigned to the function name

Tests 6.6.2.5-6 and 6.6.5.2-7 show that the parameter called by value can be changed inside the procedure in case of a buffer variable

Tests 6.6.5-3 and 6.6.5-4 show that the procedure DISPOSE does not check correctness of its parameter

Tests 6.6.5.3-5 and 6.6.5.3-6 show that both an actual variable parameter and an element of a record-variable-list of a `with` statement can be referred to by a pointer parameter of DISPOSE

Tests 6.6.5.3-7 thru 6.6.5.3-9 show that the restrictions on the variable, created by the second form of NEW, are not implemented

Tests 6.6.6-4 and 6.6.6-5 show that SUCC and PRED can produce values from beyond the enumeration type

Test 6.6.6.4-7 shows that the function CHR does not check the correctness of its parameter

Tests 6.8.3.5-5 and 6.8.3.6-6 show that there is no dynamic checking of the value of the `case` selector

Test 6.8.3.9-17 shows that two nested `for` statements can use the same control variable

Implementation defined

Number of tests run: 16
 Number of tests incorrectly handled: 1

Details of the implementation-dependencies:

Test 6.4.2.2-7 shows MAXINT to be 2147483647

Tests 6.4.3.4-2 and 6.4.3.4-4 show that `set of CHAR` is allowed, that the negative elements in a set are not allowed, and that elements must not exceed 255

Tests 6.6.6.1-1 fails because formal functions are implemented following the Revised Report rather than the Standard

Tests 6.7.2.3-2 and 6.7.2.3-3 show that Boolean expressions are fully evaluated

Tests 6.8.2.2-1 and 6.8.2.2-2 show that selection precedes evaluation in the binding order

Tests 6.9.4-5 and 6.9.4-11 show that the default fields are:

- 10 for integer
- 16 for Boolean
- 16 for real

Test 6.10-2 shows that REWRITE on the standard file OUTPUT is possible

Tests 6.11-1 thru 6.11-3 show that only alternate comment delimiters (and no other equivalent symbols) are permitted

Quality Measurement

Number of tests run: 23
 Number of tests incorrectly handled: 1

Details of results

Tests 5.2.2-1 and 6.1.3-3 show that there is no other limit on the length of the identifiers than the length of the line, although only the first 15 characters are significant

Test 6.18-4 shows that in case of an unclosed comment the text is swallowed without any diagnostics

Tests 6.1.2-8 and 6.1.2-9 show that large type- and label-lists are allowed

Test 6.4.3.2-4 shows that INTEGER is not allowed as an index type

Test 6.4.3.3-9 shows that fields in a record are stored in the order of their appearance in the field list

Test 6.4.3.4-5 (Marshall's algorithm) took 129 milliseconds of CPU time

Tests 6.6.6.2-6 thru 6.6.6.2-10 were completed with some errors, requiring separate analysis

Test 6.7.2.2-4 shows that `div` and `mod` have been implemented consistently for negative operands: `quotient = trunc(a/b)`, `mod` returns remainder of `div`

Test 6.8.3.5-2 shows that 'impossible' paths through `case` statements are not signalled by the processor

Test 6.8.3.5-8 shows that a large number of case labels is allowed

Test 6.8.3.9-18 shows that the value of the control variable after the completion of a `for` loop is in the range of its type (and is equal

IBM 370

PASCAL VALIDATION SUITE REPORT

to the final value)
Tests 6.8.3.9-20 and 6.8.3.10-7 show that for and with statements can be nested to a depth exceeding 15
Test 6.9.4-10 shows that flushing of the buffer of the output file occurs at the end of the program
Test 6.9.4-14 shows that recursive I/O using the same file is not possible

Extensions

Number of tests run: 1

Test 6.8.3-14 shows that otherwise clause is implemented, although one statement (rather than a sequence of them) is permitted between otherwise and end

Pascal Processor Identification

Computer: IBM 370/158
Processor: Stony Brook Pascal/360
(Developed at SUNY Stony Brook
Dept. of Computer Science)
Release 3.2 CMS version

Test Conditions

Tester: Charles Hill (MTS Philips Labs)
(Member of original implementation team)
Date: March 1980
Validation Suite Version: 2.2

Principal Deviations:

- Files use fixed length records, even for text files.
- Compiler does not permit untagged variants
- No run-time checking of tags on access to variant records
- FOR loop control variables can be altered
- PACKED and non-PACKED structures are indistinguishable
- Compiler uses structural equivalence rather than name equivalence of types
- Syntax for specifying the types of the parameters of procedural/functional parameters differs from the standard
- DISPOSE is not implemented

Main Extensions

- Case labels may be a subrange
- OTHERWISE clause in CASE statement
- Linkage to FORTRAN or machine language programs
- External compilation with type checking across module boundaries

Problems with the Validation Suite

Some syntax errors and invalid tests were discovered in the test programs; these are documented later on. The following minor violations of the assumptions made by the skeleton were found:

- Test 6.9.4-12 has a comment that begins "{This ..." causing the skeleton to mistake this comment for a header.
- The header for 6.8.3.4-1 is missing a comma.
- The expected delimiter "999" did not appear in the

program file; the termination logic has to be altered slightly anyway.

- The "END." for test 6.6.1-7 does not begin in column 1.

Conformance Tests

Number of tests passed: 113
Number of invalid tests: 3
Number of tests failed: 22 (14 causes)
Number of irrelevant tests: 3
Number of tests detecting bugs in compiler: 6

Invalid tests

6.4.3.5-1 PTRTOI, meant as a type, declared as a variable.
6.6.3.1-1 contains an actual VAR parameter non-identical in type to the formal parameter. The compiler passed this test when the error was corrected.
6.9.4-7 TRUE is written in a field of 5; when read back, the program expects it to be written left justified, in contrast to the standard which says that values should be written right justified.

Irrelevant tests

6.1.3-2, 6.4.2.2-6 Compiler uses upper case only.
6.6.6.5-1 not a test program.

Tests detecting bugs in compiler

6.2.2-3 When typing a pointer to a type NODE, the compiler uses a definition of NODE from an outer block rather than a new definition of NODE appearing later on in the same block.
6.4.3.3-3 causes a bad instruction to be generated.
6.4.5-1 produces an irrelevant error message relating to file assignment.
6.6.5.2-3 blew up on a RESET to an un-initialized internal file using Release 3.1. The test passes using Release 3.2.
6.7.2.4-3 blew up on the expression A * [] = [].

Details of Failed Tests

6.1.6-2 Labels compared for equality as strings rather than integers and thus labels "6" and "0006" are considered distinct.
6.2.1-6, 6.6.3.2-1, 6.6.3.3-1 Compiler expects at least one parameter in the program heading.
6.2.2-8 Compiler does not allow assignment to the value of a function within an inner block of that function.
6.4.2.2-2 The maximum cardinality of a subrange is restricted to the value of MAXINT; compiler gives a warning and runs correctly, but only because the subrange is subsequently treated as equivalent to type INTEGER.
6.4.3.3-1 Untagged variants are not permitted.
6.4.3.3-10 Case constants outside the tag field subrange are not allowed.
6.4.3.5-2, 6.9.1-1 Implementation uses fixed length records, even for text files; an empty line thus results in a record of blanks, rather than a single line-marker character.

6.6.3.1-5, 6.6.3.4-2 A different syntax is used for declaring the parameter types of formal procedure/function parameters - only the types of the parameters are expected.
6.6.6.2-3, which tests the real-valued standard arithmetic functions, failed on the accuracy tests for EXP and SQRT.
6.6.6.4-1 Compiler computes ORD(x) with respect to the declared subrange to which x belongs, rather than with respect to the underlying base type.
6.8.3.9-7 When using values near MAXINT in a FOR loop, compiler gave an INTEGER OVERFLOW run error.
6.9.4-4 The second width specifier for formatting reals is not implemented.
6.9.4-6 The width specifier for strings must be a constant in the current implementation.

Deviance

Number of tests passed: 54
Number of tests showing deviance: 34 (17 causes)
Number of tests failed: 5
Number of tests detecting bugs: 3

Details of tests showing deviance

6.1.7-5, 6.9.4-12 because PACKED and UNPACKED structures are treated as equivalent; i.e., the compiler makes no distinction between the two even for storage requirements.
6.1.7-6, 6.4.3.2-5 Strings are compatible with all arrays of CHAR provided the lengths match.
6.2.1-5 If an identifier is declared as a label no error is produced if it is not subsequently referenced in a GOTO.
6.2.2-4 Use of a type identifier is permitted according to its definition in an outer block despite its redefinition in an inner block.
6.3-2, 3, 4, 5, 6.7.2.2-9 shows signed constants of inappropriate types (e.g. strings) are allowed.
6.4.3.3-11, which tries to assign a value to an empty field in a record, blows up during semantic analysis (PASS 2 of the compiler).
6.4.5-3 (and 6.4.5-13, which is identical), 6.4.5-4, 5 fail because the compiler uses structural equivalence rather than name equivalence of types.
6.4.4-2 The compiler fails to flag references to a pointer variable that points to a record type that is never defined.
6.6.1-6 Shows that compiler does not catch the lack of a subsequent full declaration for a procedure declared to be FORWARD (the program is allowed to run, even though that routine is actually called!); this is a bug. This test, as supplied, contained a missing semicolon.
6.6.2-5 Compiler does not detect the lack of an assignment of a value to a function within the function block.
6.6.6.3.4 Integer arguments to TRUNC and ROUND are permitted. (Such arguments are coerced to real as they would be in any other instance where reals are expected).

6.8.2.4-2,3,4 show the compiler allows jumps into IF and ELSE parts, and into CASE branches.

6.8.3.5-10 Compiler allows real CASE labels with a corresponding REAL CASE selector; test executes correctly.

6.8.3.9-2,3,4,14,16, 6.8.3.9-9,19 Show that there are practically no restrictions on FOR loop control variables: they can be assigned to or read in within (or outside) the loop body, and declared in any block. However, altering control variables do not affect the number of loop iterations; an altered value is retained only throughout the iteration in which it is changed, since the compiler uses a hidden temporary variable as the true control variable.

6.9.4-9 Shows the compiler treats negative field widths just as positive field widths that are too small - it uses the smallest actual width possible.

6.10-1 OUTPUT is not required to be listed in the program heading when output is directed to that file in the program.

6.10-3 Shows OUTPUT can be redefined as a variable within the program block.

6.8.3.5-12 shows compiler allows ranges as case labels.

Tests showing bugs in compiler

6.4.3.3-11, 6.4.4-2, 6.6.1-6 (described above)

Tests showing extensions

6.8.3.5-12,13, 6.8.3.9-10 show ranges are allowed as case labels, and that this extension is implemented safely.

Tests failed

6.6.3.5-2, 6.6.3.6-2,3,4,5 all failed because the compiler expects a different syntax for declaring the parameter types of formal procedure/function parameters.

Comments on passed tests

6.1.5-4 Decimal point not followed by a digit in a real number flagged as an error, but the program is allowed to run because no ambiguity is present in the case tested by the program.

6.1.7-11 A null string is flagged, but the program is allowed to run with a blank substituted.

6.1.8-5 Nested comments are permitted if the alternate delimiter symbols are used.

6.9.4-8 When real format is used to output an integer, the error is flagged but the program is allowed to run.

Error handling tests

Number of tests passed: 25
Number of tests failed: 23
Number of invalid tests: 1

Details of failed tests

6.2.1-7 No error message is given when an undefined

variable is used.

6.4.3.3-5,6 show no run-time check on tag values is performed when referencing variants.

6.4.3.3-7,8 failed because the compiler does not allow untagged variants.

6.4.6-7,8, 6.7.2.4-1 show the compiler does not complain when the value of the expression in a set assignment lies outside the subrange to which the variable belongs (but is within the underlying base type).

6.6.2-6 Shows no check is made whether a function receives a value.

6.6.5.2-2 No EOF error given. This test fails because the implementation uses fixed length records for text files, and thus short lines are padded with blanks.

6.6.5.2-6,7 No error is given if a file component variable is an actual parameter to a procedure that does I/O to the file and thus alters the file component.

6.6.5.3-3,4 fail because DISPOSE is not implemented; no check is made on the validity of its arguments. Similarly, 6.6.5.3-6 shows no error is given when a pointer used in selection of a WITH control variable is disposed.

6.6.5.3-5 would fail if the test program were valid; the parameter A should be a VAR parameter.

6.6.5.3-7,8 show that no error is given if a variable returned by NEW containing tagged variants is used in its entirety.

6.8.3.5-5,6 When the value of a case selector <> any of the labels, no error message is given.

6.8.3.9-5,6,17 show that a FOR loop control variable is accessible outside the loop. After normal execution of the loop, it has the final value of the range. No error is given for nested FOR loops using the same control variable; the program iterates the expected number of times.

Implementation defined tests

Number of tests run: 15

Number of tests detecting bugs: 1

Details of Implementation dependence

6.4.2.2-7 shows MAXINT = 2147483647.

6.4.3.4-2 shows sets of CHAR are allowed.

6.4.3.4-4 shows the maximum set cardinality > 1000.

6.6.6.1-1, in which ODD appears as an actual function parameter, does not compile. The real-valued arithmetic functions are the only standard functions able to be passed in this way.

6.6.6.2-11 ran to completion, but some inconsistencies occurred (i.e., XMIN <> BETA**MINEXP).

6.7.2.3-2,3 show short circuit evaluation of expressions is performed.

6.8.2.2-1 shows selection is performed before evaluation in A[I] := SIDEFFECT(I). By contrast, test 6.8.2.2-2 shows

evaluation occurs before selection in P@ := SIDEFFECT(P).

6.9.4-5 shows 2 digit exponents in output of real numbers.

6.9.4-11 detected a bug in RELEASES 3.0, 3.1. It shows the default field widths to be:

integer: 12
boolean: 14
real: 9

in contrast to the User manual and earlier releases, in which these formats are 12, 6, 14, respectively. This bug has been repaired in RELEASE 3.2.

6.10-2 shows REWRITE(OUTPUT) is not allowed.

6.11-1 shows the alternate comment convention is allowed; the delimiters must be pairwise matched, thus allowing code sections to be commented out.

6.11-2,3 show equivalent symbols %, .-, GT, LT, GE, LE, NE, are not allowed. @ is used instead of the EBCDIC translation of up-arrow.

Quality tests

Number of tests run: 22

Number of tests detecting bugs in compiler: 6

Number of tests not performed: 1

5.2.2-1, 6.1.3-3 show identifiers are distinguished over their whole length, but the compiler gives no indication the programs do not conform (i.e., contain identifiers with > 8 character significance). The compiler permits identifiers of up to 256 characters.

6.1.8-4 Shows compiler gives no indication of unclosed comments.

6.2.1-8,9, 6.5.1-2, 6.6.1-7, 6.8.3.9-20, 6.8.3.10-7 show a large number of label and type declarations, deeply nested (>15 levels) procedures, FOR loops, and WITH statements are permitted. However, test 6.8.3.5-8, which contains a heavily populated CASE statement, caused a compile time data structure to overflow at case 152.

6.7.2.2-4 shows DIV and MOD are implemented consistently, and that MOD yields the remainder of DIV.

6.9.4-10 shows that the output buffer is flushed at the end of the program.

6.8.3.5-2 shows the compiler does not detect that a case label, while contained in the underlying type, lies outside the subrange to which the selector belongs.

6.4.3.3.9 shows the ordering of the representation of variant fields is the same as the order of declaration.

6.6.6.2-6,7,8,9,10, which test the standard real-valued arithmetic functions, gave a mean relative error between E-06 and E-07 in the interval tests. The special argument tests gave fairly good results. Most identity tests gave zero, as required; those that did not were within E-06 relative to the arguments.

6.8.3.9-18 shows the value of a FOR statement control

variable after normal termination of the loop is the specified upper limit.

6.9.4-14 shows "recursive" I/O is allowed.

Test not performed

6.4.3.4-5 could not be run because timing is currently not implemented in the CMS version.

Tests demonstrating compiler bugs

6.4.3.2-4 shows compiler accepts an array with an index type of INTEGER, but the resulting program does not run correctly.

6.6.6.2-6,7,8,9,10 all crashed at run-time using Release 3.1. The bug has been fixed in Release 3.2.

Extensions

Number of tests run: 1

Test 6.8.3.5-14 did not compile; the compiler supports the OTHERWISE extension to the CASE statement but OTHERWISE <statement> replaces END rather than preceding it as in the proposed standard extension.

Univac 1100

PASCAL VALIDATION SUITE REPORT

Authored by:

I.E. Johnson, E.N. Miya, S.K. Skedzielewski

Pascal Processor Identification

Computer: Univac 1100/81

Processor: University of Wisconsin Pascal version 3.0 release A

Test Conditions

Testers: I.E. Johnson, E.N. Miya.

Date: April 1980

Validation Suite Version: 2.2

General Introduction to the UW Implementation

The UW Pascal compiler has been developed by Prof. Charles N. Fischer. The first work was done using the P4 compiler from Trondheim, then the NOSC Pascal compiler written by Mike Ball was used, and now all development is done using the UW Pascal compiler.

There are two UW Pascal compilers; one produces relocatable code and has external compilation features, while the other is a "load-and-go" compiler, which is cheaper for small programs. Most tests were run on the "load-and-go" version. Both compilers are 1-pass and do local, but not global optimization. The UW compiler is tenacious and will try to execute a program containing compile-time errors. This causes problems when running the Validation Suite, since programs that are designed to fail at compile time will appear to have executed.

Conformance Tests

Number of Tests Passed: 123

Number of Tests Failed: 16

Details of Failed Tests

Test 6.4.3.5-1 failed on the declaration of an external file of pointers (only internal files of pointers are permitted).

Tests 6.4.3.5-2, 6.4.3.5-3 and 6.9.1-1 failed due to an operating system "feature" which returns extra blanks at the end of a line. This problem affects EOLN detection.

Test 6.5.1-1 failed because the implementation prohibits

files that contain files.

Tests 6.6.3.1-5 and 6.6.3.4-2 failed because the current version of this implementation prohibits passing standard functions and procedures as parameters.

Test 6.6.5.3-1 failed to assign an already locked tag field in a variant record, but the standard disallows such an assignment! (Error in test?)

Test 6.6.5.4-1 failed to pack because of a subscript out of range. MACC notified.

Test 6.6.6.2-3 failed a nine-digit exp comparison. Univac uses 8 digit floating point.

Test 6.6.6.5-2 failed test of ODD function (error with negative numbers).

Test 6.8.2.4-1 failed because non-local GOTO statements are not allowed by this implementation.

Test 6.8.3.4-1 failed to compile the "dangling else" statement, giving an erroneous syntax error.

Tests 6.9.4-1 and 6.9.4-4 failed do unrecoverable I/O error. Problem referred to MACC.

Test 6.9.4-7 failed to write boolean correctly. UW right-justifies each boolean in its field; the proposed ISO standard requires left-justification.

Extensions

Number of Tests Run: 1

Details of Tests

Test 6.8.3.5-14 shows that an OTHERWISE clause has been implemented in the case statement.

Deviance Tests

Number of Deviations Correctly Handled: 77

Number of Deviations Incorrectly Handled: 14

Number of Tests Showing True Extensions: 2

Details of Extensions

Test 6.1.5-6 shows that a lower case e may be used in real numbers.

The research described in this paper was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under NASA Contract NAS7-100.

Test 6.1.7-11 shows that a null string is accepted by this implementation.

Details of Incorrect Deviations

Tests 6.2.2-4, 6.3-6, 6.4.1-3 show errors in name scope. Global values of constants are used even though a local definition follows; this should cause a compile-time error.

Tests 6.4.5-3, 6.4.5-5 and 6.4.5-13 show that the implementation considers types that resolve to the same type to be "equivalent" and can be passed interchangeably to a procedure.

Test 6.6.2-5 shows a function declaration without an assignment to the function identifier.

Test 6.8.3.9-4 the for-loop control variable can be modified by a procedure called within the loop. No error found by implementation.

Tests 6.8.3.9-9, 6.8.3.9-13 and 6.8.3.9-14 show that a non-local variable can be used as a for-loop control variable.

Test 6.9.4-9 shows that a negative field width parameter in a write statement is accepted. It is mapped to zero.

Test 6.10-1 shows that the implementation substitutes the default file OUTPUT in the program header. No error message.

Test 6.10-4 shows that the implementation substitutes the existence of the program statement. We know that the compiler searched first but found source text (error correction).

Tests 6.1.8-5 and 6.6.3.1-4 appear to execute; this occurred after the error corrector made the obvious changes.

Error Handling

| | |
|--------------------------------------|----|
| Number of Errors Correctly Detected: | 29 |
| Number of Error Not Detected: | 17 |

Details of Errors Not Detected

Tests 6.2.1-7, 6.4.3.3-6, 6.4.3.3-7, 6.4.3.3-8 and 6.4.3.3-12 show that the use of an uninitialized variable is not detected. Variant record fields are not invalidated when the tag changes. 6.4.3.3-12 incorrectly printed "PASS" when it should have printed "ERROR NOT DETECTED"

Test 6.6.2-6 shows the implementation does not detect that a function identifier has not been assigned a value within the function. The function should be undefined. The quality of the test could be improved by writing the value of CIRCULERADIUS.

Test 6.6.5.2-2 again runs into the EOLN problem.

Test 6.6.5.2-6 shows that the implementation fails to detect the change in value of a buffer variable when used as a global variable while its dereferenced value is passed as a value parameter. This could not cause an error, and none was flagged. However, when the char was changed to a var parameter no error was detected, either.

Test 6.6.5.2-7 shows that the implementation fails to detect the change in a file pointer while the file pointer is in use in a with statement. This is noted in the implementation notes.

Test 6.6.5.3-5 shows the implementation failed to detect a dispose error; but again, the parameter was passed by value, not by reference! (Error in test)

Tests 6.6.5.3-7 and 6.6.5.3-9 show that the implementation failed to detect an error in the use of a pointer variable that was allocated with explicit tag values.

Tests 6.6.6.3-2 and 6.6.6.3-3 show that trunc or round of some real values. 2**36 does not cause a run time error or warning. In those cases, the value returned was negative. Error reported to MACC.

Tests 6.7.2.2-6 and 6.7.2.2-7 show that the implementation failed to detect integer overflow.

Tests 6.8.3.9-5 and 6.8.3.9-6 show that the implementation does not invalidate the value of a for-loop control variable after the execution of the for-loop. Value of the variable is equal to the last value in the loop. These tests could be improved by writing the value of m.

Implementation Defined

| | |
|--------------------------------------|----|
| Number of Tests Run: | 15 |
| Number of Tests Incorrectly Handled: | 0 |

Details of Implementation Definitions

Test 6.4.2.2-7 shows maxint equals 34359738367 (2**35-1).

Test 6.4.3.4-2 shows that a set of char is allowed.

Test 6.4.3.4-4 shows that 144 elements are allowed in a set, and that all ordinals must be ≥ 0 and ≤ 143 .

Test 6.6.6.1-1 shows that neither declared nor standard functions and procedures (nor Assembler routines) be passed as parameters.

Test 6.6.6.2-11 details a number of machine characteristics such as

XMIN = Smallest Positive Floating Pt # = 1.4693679E-39

XMAX = Largest Positive Floating Pt # = 1.7014118E+38

Tests 6.7.2.3-2 and 6.7.2.3-3 show that boolean expressions are fully evaluated.

Tests 6.8.2.2-1 and 6.8.2.2-2 show that expressions are evaluated before variable selection in assignment statements.

Test 6.9.4-5 shows that the output format for the exponent part of real number is 2 digits. Test 6.9.4-11 shows that the implementation defined default values are:

- integers : 12 characters
- boolean : 12 characters
- reals : 12 characters

Test 6.10-2 shows that a rewrite to the standard file output is not permitted.

Tests 6.11-1, 6.11-2, and 6.11-3 show that the alternative comment delimiter symbols have been implemented; all other alternative symbols and notations have not been implemented. In addition, it is interesting that the compiler's error correction correctly substituted "[" for "(" and ":" for "&=" as well as a number of faulty substitutions.

Quality Measurement

Number of Tests Runs: 23

Number of Tests Incorrectly Handled: 2

Results of Tests

Test 5.2.2-1 shows that the implementation was unable to distinguish very long identifiers (27 characters). Test 6.1.3-3 shows that the implementation uses up to 20 characters in distinguishing identifiers.

Test 6.1.8-4 shows that the implementation can detect the presence of possible unclosed comments (with a warning). Statements enclosed by such comments are not compiled.

Tests 6.2.1-8, 6.2.1-9, and 6.5.1-2 show that large lists of declarations may be made in a block (Types, labels, and var).

Test 6.4.3.2-4 attempts to declare an array index range of "integer". The declaration seems to be accepted, but when the array is accessed (All[maxint]), an internal error occurs.

Test 6.4.3.3-9 shows that the variant fields of a record occupy the same space, using the declared order.

Test 6.4.3.4-5 (Warshall's algorithm) took 0.1356 seconds CPU time and 730 unpacked (36-bit) words on a Univac 1100/81.

Test 6.6.1-7 shows that procedures may not be nested to a depth greater than 7 due to implementation restriction. An anomolous error message occurred when the fifteenth procedure declaration was encountered; the message "Logical end of program reached before physical end" was issued at that time, but a message at the end of the program said "parse stack overflow".

Tests 6.6.6.2-6, 6.6.6.2-7, 6.6.6.2-8, 6.6.6.2-9, and 6.6.6.2-10 tested the sqrt, atan, exp, sin/cos, and ln functions. All tests ran, however, typical implementation answers (which use the Univac standard assembler routines) were slightly smaller than Suite computed. Error typically occurred around the 8th digit (Univac floating-point precision limit).

Test 6.7.2.2-4 The inscrutable message "inconsistent division into negative operands" appears. We think it means that $I \text{ MOD } 2$ is NOT equal to $I - I \text{ div } 2 * 2$. Problem reported to MACC.

Test 6.8.3.5-2 shows that case constants must be in the same range as the case-index.

Test 6.8.3.5-8 shows that a very large case statement is not permissible ($>=256$ selections). A semantic stack overflow occurred after 109 labels.

Test 6.8.3.5-18 shows the undefined state is the previous state at the end of the for-loop. The range is checked.

Test 6.8.3.9-20 shows for-loops may be nested to a depth of 6.

Test 6.8.3.10-7 shows with-loops may be nested to a depth of 7.

Test 6.9.4-10 shows that the output buffer is flushed at the end of a program.

Test 6.9.4-14 shows that recursive I/O is permitted using the same file.

Concluding Comments

The general breakdown of errors is as follows:

I/O

These problems are intimately tied to the EXEC 1100 operating system and its penchant to pad blanks on the end of a line. There is no plan to try to correct this problem. Does an external file of pointers make sense!

Changes in the standard

Jensen and Wirth (second edition) was used as the standard for development of this compiler. Since there are discrepancies between it and the ISO proposed standard, several deviations occurred. The compiler will be brought into conformance on most of these errors when some standard is adopted.

Restrictions

Some restrictions will be kept, even after a standard is adopted. GOTO's out of procedures will probably never be implemented, but STOP and ABORT statements have been added to the language to alleviate the problem.

Bugs

Several previously unknown bugs were found by running the validation suite. Professor Fischer has been notified, and corrections should be included in the next release of the compilers.

One area that should be emphasized is the clarity of the diagnostics produced by the compiler. All diagnostics are self-explanatory, even to the extent of saying "NOT YOUR FAULT" when an internal compiler error is detected. A complete scalar walk-back is produced whenever a fatal error occurs. The compiler attempts error correction and generally does a very good job of getting the program into execution.

The relocatable compiler has extensive external compilation features. A program compiled using these facilities receives the same compile-time diagnostics as if it were compiled in one piece.

Machine-dependent Implementations

Burroughs B6700/7700 (Tasmania)



UNIVERSITY OF SOUTHAMPTON

Faculty of Mathematical Studies

Southampton, SO9 5NH. Telex 47661. Tel 0703 559122 Ext

1979 November 6

Dear Bob,

Here is the latest information on the Pascal implementation for the Burroughs B6700/7700 series, as developed at the University of Tasmania. It still exists, and has been distributed quite widely. A new manual has just been produced which sets new standards of excellence for us, and is available presumably to subscribers who have paid our annual fee (to cover postage, etc).

We have been working on the compiler to make it conform to the draft Standard (a moving target at present), and I believe the current version includes the procedural parameter feature now that this seems to have stabilized. It is pleasing to note that our attitude towards checks is paying off, as shown when we recently uncovered three different usages in the P4 compiler where undefined values of variables were tested against well-defined values. No doubt these bugs are now widely distributed through the Pascal community!

Enquiries should not be addressed to me here (where I am on leave), but rather to Pascal Support, Dept of Information Science, University of Tasmania, Box 252C GPO, Hobart, Tasmania 7001. Don't forget the airmail stamp.

Best wishes,



The University of Tasmania

Postal Address: Box 252C, G.P.O., Hobart, Tasmania, Australia 7001

Telephone: 23 0561. Cables 'Tasuni' Telex: 58150 UNTAS

IN REPLY PLEASE QUOTE:

FILE NO.

IF TELEPHONING OR CALLING

ASK FOR

15th April, 1980

Mr. R. Shaw,
Digital Equipment Corp.,
5775 Peachtree-Dunwoody Road,
Atlanta, Georgia.
U.S.A.

Dear Rick,

I have recently updated the B6700/7700 Pascal compiler to level 3.0.001. This compiler conforms to the Working Draft Standard, as published in Pascal News #14, fairly well. A copy of the updated Pascal Validation Suite Report concerning this compiler is enclosed.

We are in the process of distributing this compiler to all those installations which are currently using our Pascal system. The distribution should be complete by the time you receive/publish this letter.

We are also producing an updated Pascal Reference Manual to reflect the new compiler. The manual has just gone to the printers and we will distribute copies to users of our Pascal System when it returns. Allow a month or so.

Enclosed is an updated checklist describing the new compiler.

Yours sincerely,

Roy A. Freak,
Information Science Department

CHECKLIST

Burroughs B6700/B7700 (Tasmania)

0. DATE/VERSION April 1980 Version 3.0.001

1. IMPLEMENTOR/DISTRIBUTOR/MAINTAINER
 R.A. Freak & A.H.J. Sale;
 Pascal Support,
 Department of Information Science,
 University of Tasmania,
 Box 252C, GPO.,
 HOBART, Tasmania 7001
 Australia.
 phone (002) 230561 ext 435

2. MACHINE Burroughs Model III B6700, B7700

3. SYSTEM CONFIGURATION
 Burroughs MCP version II.8 (and later versions). Minimal system
 to operate is not known, but there is not likely to be any B6700
 that small. Storage demands are low and little else is critical.

4. DISTRIBUTION
 Usually supplied on a 9-track PE tape but other forms on both 7
 and 9-track tapes are available. An annual fee of \$A100 is
 charged to cover mailing (air mail), processing and maintenance.

5. DOCUMENTATION Available documentation:
 R80-4: Pascal Reference Manual (similar to Burroughs Algol Manual)
 A Pascal language card
 A Pascal System card
 Pascal Validation Suite Report for B6700/B7700 Pascal.

6. MAINTENANCE
 To be maintained for teaching within the university as well as
 larger aims. Reported bugs will be fixed as soon as possible,
 with patch notices being sent to users. Duration of support not
 yet determined; several other developments are pending. Each
 installation is issued with a supply of FTR-forms similar to those
 used by Burroughs for use in corresponding with us, and we will
 attempt to do a professional job in maintaining the system.

The compiler has been stable in code for some time, reflecting its basic integrity. However, new features are added from time to time, and notified to users as patches or as a new version release. The department accepts FTR notices and will attempt to fix those which warrant such attention. Some modifications have taken place as a result of user feedback. The compiler was especially designed not to generate dangerous code to the MCP, and no system crashes have been attributed to it since the first few months of testing, 3 years ago, and then only three.

7. STANDARD

The compiler conforms fairly well to the Pascal Standard as published in Pascal News #14. We intend to update the compiler when a Pascal standard is accepted by ISO. The compiler performs better than most during testing by the Pascal Validation Suite. Briefly, the following restrictions and extensions apply:
Restrictions: Program heading; reserved word program is synonymous with procedure; file parameters are ignored after program heading.

Extensions: otherwise in case statement. Various reserved words, character set transliterations. Burroughs comment facility. File attributes in declaration. Format declarations and record oriented i/o available. Extensive Burroughs-compatible compiler options (Pascal control comment option mode not implemented). Ability to link in externally compiled subprograms.

8. MEASUREMENT

Compiles about 20% slower than Fortran or Algol, but in about 2/3 their space (for test programs about 4-5K words on average instead of 8-10K). Elapsed compilation times similar, though Pascal slower. Speed should be improved by eventual tuning.

Executes at the same speed as Fortran and Algol (code is similar and optimal) and takes generally longer elapsed residence time primarily due to MCP intervention to create new segments for record structures (not present in Fortran/Algol). Elapsed residence time about 20% greater than equivalent Algol.

9. RELIABILITY

Excellent. Since the early testing three years ago, no system crashes have been attributed to Pascal. The compiler is now in use at 28 sites throughout the world. It has been in use since 76/10 at University of Tasmania. First released to outside sites in 77/4.

10. DEVELOPMENT METHOD

Compiler which generates B6700/B7700 code files which are directly executed by the B6700 MCP. Written in B6700 Algol with two intrinsics written in Espol. Hand-coded using Pascal-P as a guide/model. All other paths offered much more difficulty due to special nature of machine/system. Person-month details not kept, but project proceeds in fits and starts as teaching and other activities intervene. Project has been undertaken largely by two people: Professor A.H.J. Sale and R.A. Freak with some support from T.S. McDermott.

11. LIBRARY SUPPORT

With release 3.0.001 of the Pascal compiler, the system has the ability to link in externally compiled subprograms written in another language. There is no facility available for separately compiling Pascal subprograms (not standard) so the only method of binding involves a Pascal host and a subprogram written in another language. The system contains an extended set of pre-defined mathematical functions.

CDC 6000 (Zuerich-Minnesota)

The new distributor for Pascal-6000 for East Asia and Australia is now:

Pascal Coordinator
University Computing Centre: H08
University of Sydney
Sydney, N.S.W. 2006 Australia
Phone: 61-02-292 3491

Tony Gerber is finishing his studies and passed the responsibilities on to Brian Rowsell.

DEC LSI-11 (SofTech)

The UCSD version of Pascal is available from SofTech for \$350 (includes operating system, compiler, editor, etc.). A FORTRAN that compiles to P-code is also available. For more information and processors that are supported, contact:

SofTech Microsystems
9494 Black Mountain Road
San Diego, California 92126

DEC VAX 11/780

UNIVERSITY OF WASHINGTON
DEPARTMENT OF COMPUTER SCIENCE

VAX-11 Pascal Compiler for the UNIX/32V Operating System

The Pascal compiler for the Digital Equipment VAX-11 computer, VAX-11 Pascal, has recently been modified to execute under the UNIX/32V operating system, version 1. The compiler, VAX-11 Pascal/Unix, will be distributed by the University of Washington, Department of Computer Science (UW), on a sublicense basis, subject to the following conditions.

1. All right, title, and interest in VAX-11 Pascal/Unix are the property of Digital Equipment Corporation (DEC).
2. Requestors for VAX-11 Pascal/Unix must have a license for the VMS version of VAX-11 Pascal from DEC. An object code license is required for the VAX-11 Pascal/Unix object code, a source code license for the VAX-11 Pascal/Unix source code.
3. The VAX-11 Pascal/Unix system will be distributed for a copy charge of US \$ 50.00, payable to the University of Washington. Distribution will be on magnetic tape provided by UW. Please send your request, together with a check or purchase order, to

Department of Computer Science
University of Washington
Mail Stop FR-35
Seattle, WA 98195

Further information can be obtained by contacting

Professor Hellmut Golde (206) 543-9264

4. Requestors must sign the sublicense agreement attached to this announcement and return it to UW with the order. Please use the proper site identification so that the VMS license can be verified.
5. UW welcomes comments, suggestions and bug reports from users. Although no regular maintenance will be provided by either DEC or UW, a best effort will be made by UW to correct bugs for subsequent releases of VAX-11 Pascal/Unix. Any updated versions will require an additional copy fee.

The VAX-11 Pascal/Unix compiler does not implement all features of VAX-11 Pascal. However, the VAX-11 Pascal manuals available from DEC are sufficient to use VAX-11 Pascal/Unix. The following features are not currently supported by VAX-11 Pascal/Unix:

1. Value initialization.
2. %Include directive.
3. Calls to VMS library routines and system services. However, calls to the C library and Unix services are available.
4. The VMS debugger, and hence the DEBUG option. However, users may use the Unix absolute interactive debugger, adb(1).
5. The library functions/procedures DATE, TIME, and CLOCK.
6. Standard functions/procedures as procedure parameters.

IBM Series/1 (Massey U.)

IBM Series/1 Pascal

In addition, a few restrictions are imposed under VAX-11 Pascal/Unix, as follows:

1. Since procedure linking is done by the Unix loader, all procedure names on nesting level 1 (main program level) and all external procedure names must differ in their first 7 characters. These names should not contain the character '\$'.
2. The command language interface is different to conform with Unix.
3. Only standard Unix sequential files are supported. Hence the OPEN statement is limited to the form

OPEN(<file variable>,<unix file name>,<file history>)

The specifications of <record access mode>, <record type>, and <carriage control> are ignored. Also, FORTRAN type carriage control is not available. The VMS procedure FIND has not been implemented.

Beyond these restrictions, every effort has been made to make the two compilers compatible. There are some minor differences in expressions using library procedures and in input-output conversions, due to different algorithms.

Hewlett Packard HP 1000

Hewlett Packard now distributes a version of Pascal for their HP 1000 system. For details, contact a sales office.

Pascal has been implemented at Massey University, Palmerston North, New Zealand for the IBM Series/1.

Hardware Requirements

Ability to support a 64K byte user partition using the R.P.S. operating system.

Major Restrictions

1. Files may not be declared. Four standard files are made available. These may be used as input or output files or (non standardly) as direct I/O files.
2. Some standard functions are not implemented - in particular the mathematical functions SIN, COS etc. However, selected functions may easily be implemented if required.
3. Limited to 16 bit sets, although some built in routines to handle 48 bit sets are available.

Structure

The compiler is based on the P4 portable Pascal compiler written by:

Authors: Urs Ammann, Kesav Nori and Christian Jacobi

Address: Institut fuer Informatik
Eidg. Technische Hochschule
Ch-8096
Zuerich.

It runs in two passes, (production of the P4 code and conversion of the P4 code to Series/1 code), and employs several storage overlays (not overlays as implemented in R.P.S.). All of the compiler, except the special environment (small assembler program) in which it runs, is written in Pascal. It can compile the main body of the first pass (3700+ lines of Pascal) in about ten minutes.

Availability

The compiling system will be made available to any non-profit organisation, for the cost of the distribution, from:

Computer Centre
Massey University
Palmerston North
New Zealand.

IBM 370, 303x, 43xx (IBM) IBM PASCAL/VS

Support

Although no support for the system can be provided by the Computer Centre, rough implementation notes and advice are available from the author:

N. S. James
Computing Centre
University of Otago
P.O. Box 56
Dunedin
New Zealand.

16 January 1980

IBM 370 (StonyBrook)

From the release note accompanying Release 3.0 :

"..... Release 3.0 of the Stony Brook Pascal/370 compiler completes the implementation of Pascal files (for the production version), as well as correcting a few errors reported in Release 2. All further maintenance will be relative to Release 3.0, so it should be installed immediately. If you have presently a Release 2 or Release 1 distribution tape, please return it to:

Ms. Patricia Merson
Department of Computer Science
SUNY at Stony Brook
Stony Brook, New York 11794

"..... Fairly detailed internal documentation for Pass 2 and Pass 3 of the Stony Brook compiler is now available on request from Ms. Merson. If you plan to perform any modifications of the compiler itself, you should obtain these documents. Pass 1 internal documentation has not yet been produced."

(Machine-dependent details concerning internal versus external files follows.)

Pascal/VS is a compiler for a superset of the proposed ISO standard Pascal language, operating under OS/VS1, OS/VS2, and VM/CMS. The compiler was designed with the objective of producing reliable and efficient code for production applications. Pascal/VS is an Extended Support IUP (Installed User Program), program number 5796-PNQ.

The following information was supplied by David Pickens, IBM Corporation.

VERSION/DATE

Release 1.0, June 1980

DISTRIBUTOR and MAINTAINER

IBM Corporation

IMPLEMENTORS

Pascal/VS was implemented by J. David Pickens and Larry B. Weber at the IBM Santa Teresa Laboratory in San Jose, California. Others worked on the project for short periods of time. The comments and suggestions of internal users throughout IBM have had a significant influence in shaping the final product.

MACHINE and SYSTEM CONFIGURATION

Pascal/VS runs on System/370 including all models of the 370, 303x and 43xx computers providing one of the following operating system environments:

VM/CMS

OS/VS2 (MVS) TSO

OS/VS2 (MVS) Batch

OS/VS1 Batch

Under CMS, Pascal/VS requires a virtual machine of 768K to compile a program. Execution of a compiled program can be performed in a 256K CMS machine.

The compiler requires a 512K region for compilation under OS/VS2 and OS/VS1. A compiled and link-edited program can execute in a 128K region.

DISTRIBUTION

The compiler and documentation may be ordered through a local IBM data processing branch office.

The basic material of the order consists of one copy each of the Pascal/VS Language Reference Manual (SH20-6168) and the Pascal/VS Programmer's Guide (SH20-6162). The machine-readable material consists of source code, program load modules, and catalogued procedures. When ordering the basic material, specify one of the following numbers

| Specify Number | Track Density | Description | User/Volume Requirements |
|----------------|---------------|-------------|--------------------------|
| 9029 | 9/1600 | Mag tape | None/DTR |
| 9031 | 9/6250 | Mag tape | None/DTR |

Monthly charges for this licensed Installed User Program will not be waived. The designated machine type is System/370.

| Type | Program Number/ AAS | Monthly Charge |
|------|---------------------|-----------------------|
| 5796 | PNQ | \$235.00 (in the USA) |

Monthly charges shown above are provided for information and are subject to change in accordance with the terms of the Agreement for IBM Licensed Programs (Z120-2800).

DOCUMENTATION

The Pascal/VS documentation consists of:

| Document Name | Order Number | Price |
|--------------------------------------|--------------|-----------|
| Pascal/VS Language Reference (164pp) | SH20-6168 | \$14.50 |
| Pascal/VS Programmer's Guide (144pp) | SH20-6162 | \$12.50 |
| Pascal/VS Reference Summary (16pp) | GX20-2365 | no charge |
| Pascal/VS Availability Notice | G320-6387 | no charge |

The Reference manual describes the Pascal/VS language. The Programmer's Guide describes how to use the compiler in the OS/VS1, OS/VS2 and VM/CMS environments.

The documentation may be ordered through your local IBM branch office.

MAINTENANCE

IBM will service this product through one central location known as Central Service.

Central Service will be provided until otherwise notified. Users will be given a minimum of six months notice prior to the discontinuance of Central Service.

During the Central Service period, IBM, through the program sponsor(s) will, without additional charge, respond to an error in the current unaltered release of the compiler by issuing known error correction information to the customer reporting the problem and/or issuing corrected code or notice of availability of corrected code.

However, IBM does not guarantee service results or represent or warrant that all errors will be corrected.

Any on-site program service or assistance will be provided at a charge.

Documentation concerning errors in the compiler may be submitted to:

IBM Corporation
 555 Bailey Avenue
 P.O. Box 50020
 San Jose, California 95150
 Attn: Larry B. Weber
 M48/D25
 Telephone: (408) 463-3159 or
 Tieline: 8-543-3159

Marketing Sponsor

IBM Corporation
 DPD, Western Region
 3424 Wilshire Boulevard
 Los Angeles, California 90010
 Attn: Keith J. Warltier
 Telephone: (213) 736-4645 or
 Tieline: 8-285-4645

STANDARD

Pascal/VS supports the currently proposed International Standards Organization (ISO) standard and includes many important extensions. Among the extensions are:

Entry and external procedures to provide separate compilation

"Include" facility to provide a means for inserting source from a library into a program

Varying length character strings, string concatenation, and string handling functions

Static variables

The "ASSERT" statement

"LEAVE" and "CONTINUE" statements for more flexible loop control

"OTHERWISE" clause on the CASE statement

Subranges permitted as CASE statement "labels"

Integer, real, and character constants may be expressed in hexadecimal

Various predeclared system-interface routines such as HALT, CLOCK, DATETIME, RETCODE, etc.

MEASUREMENTS

Under VM/CMS the compiler will compile a typical program of 1000 lines at the approximate rates shown below:

| Host System | Rate of compilation |
|-------------|-------------------------|
| 370/158 | 10,000 lines per minute |
| 370/168 | 20,000 " " " |
| 3033 | 40,000 " " " |

If the compiler listing is suppressed, the performance improves by 20 to 25 per cent.

RELIABILITY

Prior to external release, the compiler was distributed to over 60 test sites within IBM. The first internal shipment of the compiler was in July of 1979. All errors reported prior to the release of the compiler have been corrected.

DEVELOPMENT METHOD

The compiler consists of two passes which run as two separate programs. The first pass is based on an extensively modified version of the Pascal P4 compiler (authored by Urs Ammann, Kesav Nori, and Christian Jacobi). The P4 compiler was re-targetted to produce U-code instead of P-code as an intermediate language. U-code is an enhanced version of P-code that was designed by Richard L. Sites and Daniel R. Perkins (Universal P-code Definition, U.C. San Diego, UCSD/CS-79/037, 1979). The compiler employs the error recovery algorithm described in A Concurrent Pascal Compiler for Minicomputers by Alfred C. Hartmann (Springer-Verlag, 1977).

The second pass of the compiler translates the U-code directly into an OS object deck. The translator performs local common subexpression elimination, local register optimization, dead store removal, removal of redundant checking code, removal of cascading jumps, and various peep-hole optimizations.

All but 5% of the execution library is written in Pascal/VS; the remainder is in assembler language. I/O and heap management is done by calls to Pascal procedures.

The compiler, written in Pascal/VS, is shipped with all run time checking enabled. The compiler eliminates unnecessary range checks by keeping track of the lower and upper bounds of expressions involving subrange variables. The checking code in the compiler costs only 7 to 10% in performance.

The development of Pascal/VS began in January, 1979. To bootstrap the compiler, an experimental Pascal compiler developed by Larry

Weber was used; it was a one pass compiler written in PL/I (believe it or not!).

The first bootstrap was completed in June, 1979. Since that time, the compiler has been tested, enhanced, and modified to conform to the proposed ISO standard.

LIBRARY SUPPORT

Pascal/VS supports separate compilation of routines and uses standard OS linkage conventions. A Pascal/VS program may call routines written in FORTRAN, COBOL, and Assembler language.

DEBUGGER SUPPORT

Pascal/VS supports an interactive symbolic debugger which permits:

break points to be set

statement by statement walk-through of a procedure

variables to be displayed by name and in a form which correspond to their type (pointers, field qualifiers and subscripts are allowed).

IBM 3033 (Metropolitan Life)

Motorola 6800 (Dynasoft)

**Dyna
soft
systems**

P.O. BOX 51
WINDSOR J.C.T., N.S.
CANADA B0N 2V0
(902) 861-2202

IMPLEMENTATION CHECKLIST

0. Date 80/06/17
1. Implementor/Maintainer/Distributor
Taiwan Chang
Metropolitan Life Insurance Co.
20-Y
1 Madison Avenue
New York, New York 10010
(212) 578-7079
2. Machine/ System configuration 3033 VM/CMS
3. Distribution
Taiwan Chang
Metropolitan Life Insurance Co.
20-Y
1 Madison Avenue
New York, New York 10010
CMS tape, 1600 bpi
4. Documentation
Implementation guide, conversion guide
5. Maintenance
StonyBrook's OS Pascal Level III is not converted yet.
6. Standard
Converted from StonyBrook's OS Pascal
7. Measurements
8. Reliability
MIT okay, local okay
9. Development method
XPL implementation
10. Library support
CMS macros

Thank you for your inquiry about DYNASOFT PASCAL. I hope that this will answer most of your questions and help you decide if it will be a useful addition to your system.

DYNASOFT PASCAL was designed to make a practical subset of the PASCAL language available to the users of relatively small cassette-based 6800 and 6809 computers. Both versions occupy slightly less than 8K bytes and require at least 12K of continuous RAM beginning at \$0020 to edit and compile programs of reasonable size. The compiler will compile itself in 32K, although the source code is not included in the package.

The 6800 version was designed for the SWTPC 6800 computer with the SWTBUGtm monitor, but it can be adapted to run with most other monitors with minor patching. The 6809 version is completely self-contained with its own imbedded device drivers, and is independent of any particular monitor. Both versions include the compiler, p-code interpreter, and a line oriented text editor, and are priced at \$35.00. They are supplied on a Kansas City Standard cassette in Motorola "S1" format at 300 baud, and come with a 32 page user's manual.

The 6800 version is also available in ROM, intended for use with the SWTBUGtm monitor on the SWTPC MP-A2 processor board. It occupies the 8K block at \$C000 and is supplied in four TMS2516 EPROM's. The price is \$300.00. We do not keep a stock of blank ROM's, so please allow 8 weeks for processing.

All orders should include \$3.00 for postage and handling. Payment can be made by postal money order, check, or VISA account in either Canadian or U.S. funds.

Thank you again for your interest.

Allan G. Jost

Allan G. Jost, Ph.D.

Motorola 6800/68000 (T.H.E.)

Technische Hogeschool  Eindhoven

Den Dolech 2
Postbus 513
5800 MB Eindhoven
Telefoon (040) 47 91 11
Telex 51163

To Andy Mickel,
editor of Pascal News

DYNASOFT PASCAL SUMMARY, RELEASE 1.0

DATA TYPES:

| | |
|-------------------------|-----------------------|
| INTEGER (16 bit) | scalar (user defined) |
| CHAR (8 bit) | subrange |
| BOOLEAN | pointer |
| ARRAY (one dimensional) | |

ARITHMETIC AND LOGICAL OPERATORS:

+ - * DIV MOD AND OR NOT

RELATIONAL OPERATORS:

= <> < > <= >=

LANGUAGE FEATURES:

| | |
|--|-------------------|
| CONST | CASE-OF-OTHERWISE |
| TYPE | FOR-TO/DOWNTO-DO |
| VAR | REPEAT-UNTIL |
| PROCEDURE | WHILE-DO |
| FUNCTION | READ |
| IF-THEN-ELSE | WRITE |
| BEGIN-END | WRITELN |
| Machine-language subroutines with parameters | |
| 80 character identifiers (first 4 unique) | |
| Absolute memory addressing using pointers | |
| LINK to other programs | |
| Full recursion | |

PREDEFINED PROCEDURES AND FUNCTIONS:

ODD SHL SHR FIND HALT LINK MOVL MOVR SETP

SUPERVISOR COMMANDS:

Load, Save, Edit, Compile, Go, Move, Quit

EDITOR COMMANDS:

New, Top, Bottom, Up, Down, Find, Print, Insert,
Kill, Replace, Quit

| | | | |
|------------|-------------|----------|----------------|
| Uw kenmerk | Ons kenmerk | Datum | Doorkiesnummer |
| | | 19800319 | |
| Onderwerp | | | |

Dear Andy,

Enclosed you find checklists of two Pascal implementations we made on Motorola microcomputers: an M6800 and an XC68000, which is the experimental version of the M68000.

The M6800 implementation has already been in operation for about 2 years now and during this period the system proved to be extremely reliable and stable. This system is informally known as the POMME system (Pascal on Motorola microcomputer equipment). The compiler generates a kind of P-code which is quite different from the P-codes of the portable P4-compiler and the UCSD-code. The compiler is not a P-compiler derivative but is written from scratch. The code generated by the compiler is interpreted without the intervention of an optimizer, a linker or such. The interpreter is 3.5 Kbytes of machine code and the compiler 17.6 Kbytes of P-code. Depending on the scattering of files on floppy disk the compilation speed is between 400 and 600 lines per minute.

The language implemented contains the proposed ISO Pascal-standard as a subset. The only restriction is: files must be declared in the outerblock only (file parameters of procedures and functions are of course possible). The extensions include:

- a library facility (on source level)
- interfacing with assembly language routines

One of the programs available on the POMME system is a cross-compiler for the XC 68000. This compiler (reads and files are not yet implemented) generates relocatable machine code which does not require an interpreter, runtime package or operating system to execute. The code is close to optimal and to achieve this the compiler does not consist of a single pass but is a 3-pass compiler. This process necessarily slows down compilation, mainly because all intermediate code is kept on a floppy disk. The output of the compiler need not be input to an assembler but is executable, position independent code.

Although I have written all software of the POMME system it is now maintained and distributed by

EPOS (Efficient Pascal Oriented Systems)
 Generaal de Carislaan 60
 5623 GL Eindhoven
 The Netherlands
 tel. 040 - 445552

Some sample programs were run for speed comparisons. Roughly speaking, the M6800 system compiles at about 4 times and executes at about twice the speed of UCSD-implementations on LSI-11 and Z-80. We feel this pretty impressive for a 1 Mhz 8 bit processor. The cross-compiler for the XC68000 is much slower, it compiles at half the speed of LSI-11 and Z-80 UCSD. Execution times, however, are about equal to DEC-10, half the speed of a Burroughs B7700 and a quarter of the speed of CDC Cyber 175. Notice that the XC68000 is only a prototype of the M68000 running at half the projected speed.

Finally it should be noted that a compiler for the M6800 along the lines of the XC68000 implementation will be available soon.

Yours sincerely



JLA van de Snepckent
 Eindhoven University of Technology
 Dept. of Mathematics
 March 19, 1980

- absolute address specification of variables (to allow memory-mapped I/O without the need of assembly code).
- subranges and OTHERWISE as labels in a case-statement, subranges also in the variant-part of records.
- if the program contains a record-type definition like


```
complex = RECORD re, im: real END
```

 then the construct complex(x,y) is an expression of type complex provided x and y are of type real.
- the so-called "boundless" array parameters.
- in addition to AND and OR the short-circuited CAND and COR.
- random-access files.
- interactive I/O via files input and output

The compiler will always select the most compact representation of sets (up to 16 bytes) hence sets of characters are possible. Furthermore a SET OF 0..? requires only one byte and can beautifully be used to communicate with peripherals, due to the memory-mapped I/O.

If programs are run with runtime checks included then the detection of an error will result in a symbolic dump of the program's stack, including identifiers of variables and procedures, and line numbers of the error and "current" procedure calls. Various errors not normally checked for will be detected in case the runtime checks are turned on, e.g. a student-proof method to check changes of a controlled variable in a for-statement.

In order to speed up some of the clerical tasks of the interpreter, some IC's were added to the processor. The processor board, however, is still compatible with the original Motorola EXORciser bus. The additions allow for a continuous check on stack overflow, a check which, when done in software, is time-consuming and/or difficult (the P4 and UCSD strategies are unsafe!).

The POMME system normally operates in a single-user environment with an EXORciser or EXORbern and a dual floppy disk drive. It is, however, possible to interconnect up to 6 of these systems to form a multi-user system, sharing the disk space. The POMME system will then guarantee mutual exclusion on file access, on the basis of individual sectors.

Checklist Motorola M6800 (POMME system)

date 1980, march 19

maintainer/distributor EPOS
Generaal de Carislaan 60
5623 GL Eindhoven (The Netherlands)

maintenance fully maintained

standard contains standard-Pascal as a subset

measurements roughly twice the speed of the UCSD-implementations
on LSI-11 and Z-80; compilation even ~~four~~ four times.

reliability 2 years in operation, very stable and reliable

library support source libraries in Pascal
linkage to assembly language routines

machine Motorola M6800

Checklist Motorola XC 68000

date 1980, march 19

maintainer/distributor EPOS
Generaal de Carislaan 60
5623 GL Eindhoven (The Netherlands)

maintenance fully maintained

standard contains standard-Pascal as a subset with the exception
that real en files are not yet implemented

measurements the XC68000 is a prototype of the M68000 running at
half the projected speed, yet execution times are about
equal to DEC-10.

cross-compilation time on a M6800 is about twice as long
as compilation times of UCSD-Pascal on LSI-11 and Z 80.

reliability not much experience

library support source libraries in Pascal

machine Motorola XC 68000
cross-compilation on Motorola M6800 (POMME system)

Zilog Z-80 (MetaTech)

(See the checklist in issue #17 under Intel 8080/8085 (MetaTech))

Zilog Z-80 (Digital Marketing)

This compiler runs under CP/M and is a Pascal-P descendant. The price
is \$350.

Digital Marketing
2670 Cherry Lane
Walnut Creek, CA 994596

Zilog Z-80/ TRS-80 (People's Software)

nonprofit

computer information exchange, inc.

BOX 158, SAN LUIS REY CA 92068 (714) 757-4849

Bill McLalughlin, editor, pres., treas.
John Ingram, executive vice president
Dorcas Edge, vice president, secretary

TRS-80 COMPUTING
TRS-80 BULLETIN
(TRS-80 is Tandy Corp. trademark)

December 26, 1979

PRESS RELEASE:

TINY PASCAL COMPILER JUST \$15

People's Software at nonprofit Computer Information Exchange is selling a tiny Pascal compiler for \$15.

Written in Basic, People's Pascal I runs on any 16K TRS-80 Level II system. Compilers let computerists write fast, efficient machine code while working with a higher-level language. Pascal is the structured language everyone is talking about—and studying in college.

The People's Pascal I program development system comes on a tape with 14 programs, and 18 11x17" pages of documentation. Programs include editor/compiler, interpreter, translator, run-time system and two demonstration programs.

People's Pascal I compiler produces P codes, which the translator converts to Z-80 code, the TRS-80 native language. The user is given the option of optimizing for either speed or memory efficiency. Programs written via People's Pascal I run three times faster than those in Level II Basic—graphics is eight times faster.

To produce object programs, the computerist must use the People's Pascal I programs, plus Tandy T-Bug. Use of Tandy editor/assembler is optional.

The People's Pascal I program development system, with editor/compiler and interpreter written in Basic, and its multiple parts, is not the ultimate in speed and simplicity of use.

People's Pascal II, at \$23, is easier to use and faster operating. It is all one machine-language program. Programs written in Pascal II do not execute quite as fast as those in Pascal I because the system does not produce Z-80 object programs of the user's source program.

Both Pascal I and II compile user programs into P-codes. Both systems work in an interpretive mode, interpreting P-codes into Z-80 codes.

(more)

(PEOPLE'S PASCAL, add 1)

But Pascal I has a translator for creating Z-80 native-code programs, and Pascal II does not. In Pascal II, all user programs must be interpreted each time they are executed. Pascal I is still said to be four to eight times faster than Level II Basic.

Pascal I is only for 16K systems. Pascal II is for either 16K or 32K systems. Pascal I has UCSD-like turtle graphics. Pascal I requires line numbers in the user program, and Pascal II does not.

Dealer inquiries are invited. Computerists wishing to buy direct should include 50¢ for each tape ordered, and California residents should add 6 per cent tax (\$.90 and \$1.38, respectively, on Pascal I and II). Computer Information Exchange is at Box 158, San Luis Rey CA 92068.

Besides People's Pascal I and II, People's Pascal has three public-domain program tapes: in Level II, and two in Level I, at \$7.50 each (plus 50 cents postage-handling, CA residents add 45 cents tax). The public domain tapes have as many as 77 programs on them.

IMPLEMENTATION NOTES ONE PURPOSE COUPON

0. **DATE**
1. **IMPLEMENTOR/MAINTAINER/DISTRIBUTOR** (** Give a person, address and phone number. **)
2. **MACHINE/SYSTEM CONFIGURATION** (** Any known limits on the configuration or support software required, e.g. operating system. **)
3. **DISTRIBUTION** (** Who to ask, how it comes, in what options, and at what price. **)
4. **DOCUMENTATION** (** What is available and where. **)
5. **MAINTENANCE** (** Is it unmaintained, fully maintained, etc? **)
6. **STANDARD** (** How does it measure up to standard Pascal? Is it a subset? Extended? How. **)
7. **MEASUREMENTS** (** Of its speed or space. **)
8. **RELIABILITY** (** Any information about field use or sites installed. **)
9. **DEVELOPMENT METHOD** (** How was it developed and what was it written in? **)
10. **LIBRARY SUPPORT** (** Any other support for compiler in the form of linkages to other languages, source libraries, etc. **)

Purpose: The Pascal User's Group (PUG) promotes the use of the programming language Pascal as well as the ideas behind Pascal through the vehicle of Pascal News. PUG is intentionally designed to be non political, and as such, it is not an "entity" which takes stands on issues or support causes or other efforts however well-intentioned. Informality is our guiding principle; there are no officers or meetings of PUG.

The increasing availability of Pascal makes it a viable alternative for software production and justifies its further use. We all strive to make using Pascal a respectable activity.

Membership: Anyone can join PUG, particularly the Pascal user, teacher, maintainer, implementor, distributor, or just plain fan. Memberships from libraries are also encouraged. See the ALL-PURPOSE COUPON for details.

Facts about Pascal, THE PROGRAMMING LANGUAGE:

Pascal is a small, practical, and general-purpose (but not all-purpose) programming language possessing algorithmic and data structures to aid systematic programming. Pascal was intended to be easy to learn and read by humans, and efficient to translate by computers.

Pascal has met these goals and is being used successfully for:

- * teaching programming concepts
- * developing reliable "production" software
- * implementing software efficiently on today's machines
- * writing portable software

Pascal implementations exist for more than 105 different computer systems, and this number increases every month. The "Implementation Notes" section of Pascal News describes how to obtain them.

The standard reference and tutorial manual for Pascal is:

Pascal - User Manual and Report (Second, study edition)
by Kathleen Jensen and Niklaus Wirth.
Springer-Verlag Publishers: New York, Heidelberg, Berlin
1978 (corrected printing), 167 pages, paperback, \$7.90.

Introductory textbooks about Pascal are described in the "Here and There" section of Pascal News.

The programming language, Pascal, was named after the mathematician and religious fanatic Blaise Pascal (1623-1662). Pascal is not an acronym.

Remember, Pascal User's Group is each individual member's group. We currently have more than 3500 active members in more than 41 countries. this year Pascal News is averaging more than 100 pages per issue.